



Sears

CRAFTSMAN
REG. U.S. PAT. OFF.
**POWER and
HAND TOOLS
1968**

CRAFTSMAN...the greatest name
REGISTERED
in tools for 40 years

(Complete index on page 96)

Air Tools	46
Automotive Tools	84, 85
Band Saws	12
Bench Saws, Blades	6-11
Braces and Bits	68
Chisels	61, 81
Drills	18, 40-43, 68
Electric Hand Saws	50, 51
Grinders	32, 33, 39
Hack Saws	28, 73
Hammers, Saws, Staplers	62-65
Impact Tools	46, 47
Jig Saws	13
Jointer Planers	14
Lathes	15, 20, 21
Levels	67
Miter Boxes	65
Motors	36, 37
Planes	38, 66
Pliers	77-79
Plumbers' Tools	58, 59
Precision Tools	74-77
Sabre Saws	48, 49
Sanders	16, 52-54
Shapers	16
Shop Vacuums	17
Surveying Instruments	70, 71
Radial-arm Saws	2-5
Taps and Dies	82, 83
Tool Boxes and Cabinets	96, 98, 99
Tool Stands and Benches	3, 29, 97
Welders	24-27
Wrenches	58, 84, 86-95, 100

*Satisfaction guaranteed
or your money back*

SEARS, ROEBUCK AND CO.

Specially designed to handle tough commercial jobs
Our biggest and most powerful
Radial-arm Saw



\$299⁰⁰



Legs included...
no stand
needed

This **CRAFTSMAN** 12-inch Saw develops
a full 3 HP... cuts wood 4 inches thick

- Carriage glides on round steel tracks for extra-long service
- Color-coded controls up front for fast and easy set-ups
- Blade doesn't protrude from table when outtripping... safer
- Legs can be mounted horizontally for use as carrying handles

A massive, brawny, extra-powerful saw... precision-built for superb cutting accuracy. Top commercial quality throughout. Electro-magnetic brake stops blade automatically... more convenient than mechanical brakes... does not drag when blade is started. No waiting between set-ups. Carriage glides on sealed, permanently lubricated ball-bearings. Motor, yoke and carriage are easily removed for storage.

Extra-large 28 1/4 x 44-inch table provides plenty of work space. Back-end of 3/8-inch arbor has standard 1/2-inch x 20-thread... needs no special adapters for standard accessories. Automatic thermal overload protector resists motor burn out. Adjustable anti-kickback and splitter.

Cuts from top... layout marks are always in view. Settings hold fast... give precision cuts even with repeated operations. Handle and motor are an integral assembly... single-hand control with full-view cutting keeps you in control at all times. Rocker-type switch with key-lock... provides extra safety when tool is left unattended.

Direct drive for full power... no belts needed. Capacitor-start motor has permanently lubricated ball bearings for long life. Operates on 110-120 or 230-volt, 60-cycle AC. 12-inch "Free-Cut" Kromedge combination blade. UL listed (Industrial Standards). See accessories on facing page.

Shipping weight 236 pounds.
99 KT 2950N—\$14.50 monthly... Cash \$299.00

SPECIFICATIONS

- Motor... develops 3 HP, 3450 RPM
- Blade size... 12-inch x 3/8-inch bore
- Depth of cut (maximum)... 4 inches
- Depth of cut 45° (maximum)... 3 1/4 inches
- Width of crosscut (max.) in 1-in. stock... 16 in.
- Width of rip (maximum)... 26 1/2 inches
- Height adjustment... 9 1/4 inches
- Dado size... 8-in. diameter x 3 1/4 in.
- Dado depth (maximum)... 1 1/4 inches
- Miter index stops... Arm rotates 360°, fixed stops at 0° and 45° right or left
- Yoke... Swivels 180° left or right with fixed stops at 0° and 90° right or left
- Tilt index... Motor tilts 180°—fixed stops at 0°, 45° and 90° right or left
- Scales... Miter, bevel, in-and-out rip
- Table... Resin-bonded chipboard 28 1/4 x 44 x 1 in.
- Column diameter... 3 inches
- Distance from center line of column to end of arm... 30 1/2 inches
- Over-all size... 34 1/4 inches high, 44 inches wide, 38 1/4 inches long

Here's what this versatile saw can do by itself and in combination with accessories listed on the opposite page.
"CRAFTSMAN Radial-arm Saw Book" at right explains all these operations in detail.



SHAPES



DRILLS



RIPS



DADOES



MITERS



ROUTS



SANDS



RABBETS

You get many more uses for your **CRAFTSMAN** Radial-Arm Saw with these handy accessories



Miter Vise

1 A double-jaw vise for cutting perfect 45° miters (90° miter joints) on all radial-arm saws and swing saws. Holds molding and frame sections up to 3 in. wide. Aluminum base and jaws with steel screw for rigid clamping. For wood or metal. 9 KT 3279—Shpg. wt. 2 lbs. \$9.99

Radial Arm Saw Book

2 Gives complete information for getting the most out of the radial-arm saws shown in this catalog. Explains and illustrates all operations. 102 pages in all. Durable plastic cover. 9 KT 2938—Shpg. wt. 15 oz. \$3.99

CRAFTSMAN Key Chuck

3 Converts your saw for routing, drilling, etc. Precision geared. Holds standard-shank boring tools up to 1/2 in. diam. Fits 3/4-20-thread shaft. Capacity: 3/4 to 1/2 in. Comes with key. 9 KT 2980—Shpg. wt. 1 lb. \$5.99

Molding Head Guard

4 Gives you extra protection when saw is used as a shaper. Use with molding heads and dados on page 9. Fits radial-arm saws on pages 2, 4 and 5. Also fits former saws 99-2900 and 99-2940. 9 KT 29524—Shpg. wt. 1 lb. 1 oz. \$7.99

Shaper Fence

5 3-inch movement. 45° angular adjustment. An ideal support when cutting picture, window or door frames. 9 KT 2954—Shpg. wt. 4 lbs. 3 oz. \$6.99

Hold-down Attachment

6 Fits most bench saws, radial-arm saws, shapers and jointers. Keeps hands away from cutting blade. Provides constant pressure on the work-piece the entire length of the cut. Four steel fingers hold work tightly against fence and table top. . . keeps it from creeping away from the blade.

Attachment includes 2 clamps for attaching auxiliary rip fence (rip fence not included) to regular rip fence; 2 tempered steel "L" rods that attach to clamps and hold-down fingers; 4 holding fixtures that lock fingers to "L" rods; 4 spring steel hold-down fingers. All mounting hardware and instructions included. 9 KT 3230—Shpg. wt. 2 lbs. 11 oz. \$3.99

Floating Ring Guard

7 Gives you maximum protection while you retain a clear view of operation at all times. Guard "floats" up and covers work as saw is fed. Will not distract attention from cutting operation, thus giving a precision cut.

Fits saw 99 KT 2941N on page 4 and former saws 99-2940 and 99-2931. Not for use on radial-arm saw 99 KT 2935N on page 5 or radial-arm saw 99 KT 2950N on page 2. 9 KT 29005—Shpg. wt. 1 lb. 8 oz. \$5.99

Rotary Surface Planer Attachment

8 Three blades give extra-smooth finish. 3/4-inch arbor hole. Fits CRAFTSMAN radial-arm saws on pages 2, 4 and 5; also former saws 99-2940, 99-2900 and 99-2931. 9 KT 29512—Shipping weight 1 lb. \$6.99

Surface Planer Attachment with Carbide-tip. Similar to (8) above, but carbide tips stay sharp much longer. . . lasts much longer than non-tipped surface planers.

9 KT 29513—Shipping weight 1 lb. \$9.99



Heavy-duty Stand or Cabinet

With 3 drawers and door **\$44⁹⁹**

9 Provides solid support for radial-arm saws and other heavy tools. Use with saw 99 KT 2941N on page 4 or saw 99 KT 2935N on page 5. Converts into a shop cart with casters listed below. Holds 5 drawers or 4 shelves (listed below) or any combination. Sides (and door listed below) are perforated to hold hooks for tools and accessories. 26 assorted hooks included with cabinet.

Basic stand has top tray with 1 3/4-inch rim; bottom and back. Use top with rim down as shelf or up as tray. Adjustable feet. Gray enameled finish. Drawers have red trim. Shipped unassembled.

Stand with 3 drawers and door. 23 3/4 x 18 x 32 3/4 in. high. See description of door and drawers below.

99 KT 10304L5—Shipping weight 76 lbs. \$44.99

Basic Stand, Without door or drawers. 99 KT 10303L—Shipping weight 43 lbs. 26.99

Steel Drawer,* 16 1/4 x 15 1/4 x 4 1/4 in. With mounting rails and drawer slides. 99 KT 10327C—Shipping weight 9 lbs. \$4.99

Steel Shelf,* With mounting hardware. Shpg. wt. 4 lbs. 99 KT 10347C—(16 1/4 x 18 1/4 x 1 1/2 in.) \$2.99

Steel Door,* 24 7/8 inches high; 20 5/8 inches wide. Full-length hinge. Tumbler lock. 2 keys. 99 KT 10336C—Shipping weight 8 lbs. \$5.49

*These three accessories fit stands above and below; also 99 KT 10263N2 on page 97.

10 Retractable Caster Set. Step on lever to lower casters for rolling. . . step on it again to retract casters. Cast aluminum. Hard plastic wheels. For stand above. Also for 99 KT 10525K, 99 KT 1071K on page 29 and 99 KT 10263N2 on page 97. Fits former 99-1026, 99-10425, 99-1030 and 99-10307. Set of 4 casters. 99 KT 7440C—Shipping weight 11 lbs. Set \$12.99

Utility Stand \$19⁹⁹

Here's a rugged, heavy-gauge steel utility stand designed for use with radial-arm saw 99 KT 2935N on page 5 and former number 99-2931. Not for saw 99 KT 2941N on page 4 or saw 99 KT 2950N on page 2. 24 x 18 x 32 3/4 inches high. Adjustable feet permit leveling stand on uneven floors. 20-inch space between top and bottom rails will hold 5 drawers or 4 shelves. . . or any combination. Drawers and shelves not included. (listed above). Sides perforated to hold tools. 26 hooks included. Unassembled. Not for use with casters.

Shpg. wt. 32 lbs. 99 KT 10301L.... \$19.99



No Money Down on anything Sears sells


SEE PAGE 98

CRAFTSMAN SEARS 3

CRAFTSMAN 10-inch Radial-arm Saw develops 2 HP

REG. U.S. PAT. OFF.

Special electro-magnetic
brake stops blade
within 10 seconds

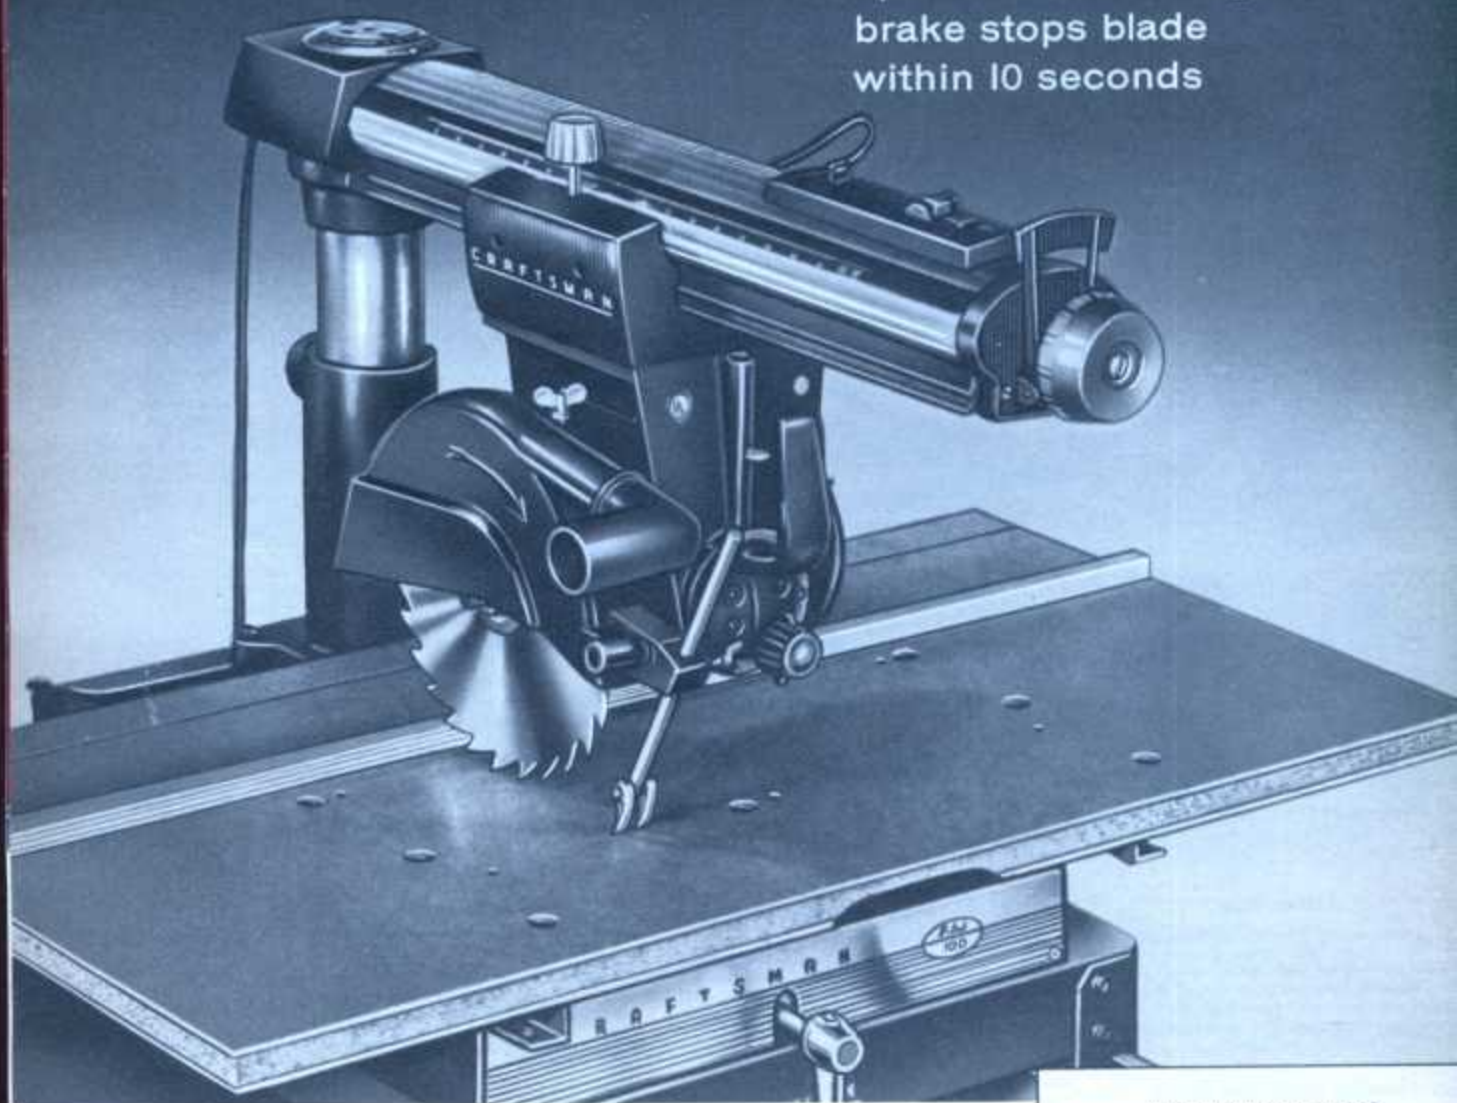

\$209⁹⁵ without stand

- Automatic friction lock holds carriage securely when it is pushed to rear end of track . . . helps stop bounce-back and creeping
- Color-coded controls are positioned up front for speedy set-ups
- Large 20 $\frac{3}{4}$ x 40-inch table doubles as a convenient work bench
- Enclosed 3-inch diameter column provides extra rigid support

Meets the requirements of professional craftsmen and home workshop owners who demand extra accurate, top-quality tools. Practically an entire woodworking shop in one tool (for added versatility, see accessories listed on page 3).

The electro-magnetic brake is more convenient than ordinary mechanical brakes . . . stops blade automatically when power is shut off. No waiting between set-ups . . . brake does not drag when saw is started. Saw glides along radial arm on permanently lubricated ball bearings . . . a feather-light touch moves entire carriage mechanism. 4 $\frac{1}{4}$ inches between bearing centers for extra smooth carriage travel. Automatic thermal overload protector resists motor burnout.

Key-lock on on-off switch provides extra safety when tool is left unattended. Back-end of $\frac{3}{8}$ -inch motor shaft is standard $\frac{1}{4}$ -inch x 20-thread size . . . needs no special adapters for handling accessories. Cuts from top . . . layout marks are always in full view. Adjustable anti-kickback device.

Direct drive for full transmission of power . . . no belts or gears needed. Capacitor-start motor has permanently lubricated ball bearings for long life. Operates on 110-120 or 230-volt, 60-cycle AC. UL listed (Industrial Standards). 10-inch Kromedge[®] taper-ground combination blade. Stand is not included (order 99 KT 10304L5 listed on page 3).

Shipping weight 182 pounds.
99 KT 2941N—\$10.00 monthly . . . Cash \$209.95


SPECIFICATIONS

- Motor develops 2 HP, 3450 RPM
- Blade size 10-inch x $\frac{3}{8}$ -inch hole
- Depth of cut (maximum) 2 $\frac{1}{2}$ inches
- Depth of cut 45° (maximum) 2 $\frac{1}{2}$ inches
- Width of crosscut (maximum) in 1-inch stock 15 $\frac{1}{4}$ inches
- Width of rip (maximum) 25 $\frac{1}{4}$ inches
- Height adjustment 8 inches
- Dado size 8-inch diameter x $1\frac{3}{4}$ in.
- Dado depth (maximum) 1 $\frac{1}{2}$ inches
- Miter index stops Arm rotates 360°, fixed stops at 0° and 45° left or right
- Yoke Swivels 180° left or right—fixed stops at 0°, 45° and 90° left or right
- Bevel index Motor tilts 180°—fixed stops at 0°, 45° and 90° left or right
- Scales Miter, bevel, in-and-out rip
- Table Laminated hardboard, resin-bonded wood particles. 20 $\frac{3}{4}$ x 40 x 1 inch
- Column diameter 3 inches
- Distance from center line of column to end of arm 30 $\frac{1}{2}$ inches
- Over-all size 29 $\frac{1}{4}$ inches high, 40 inches wide, 34 $\frac{1}{2}$ inches long

CRAFTSMAN 9-inch Radial-arm Saw develops 1¾ HP

REG. U.S. PAT. OFF.

Carriage rolls on built-in hard steel tracks for wear-resistance and accurate cutting

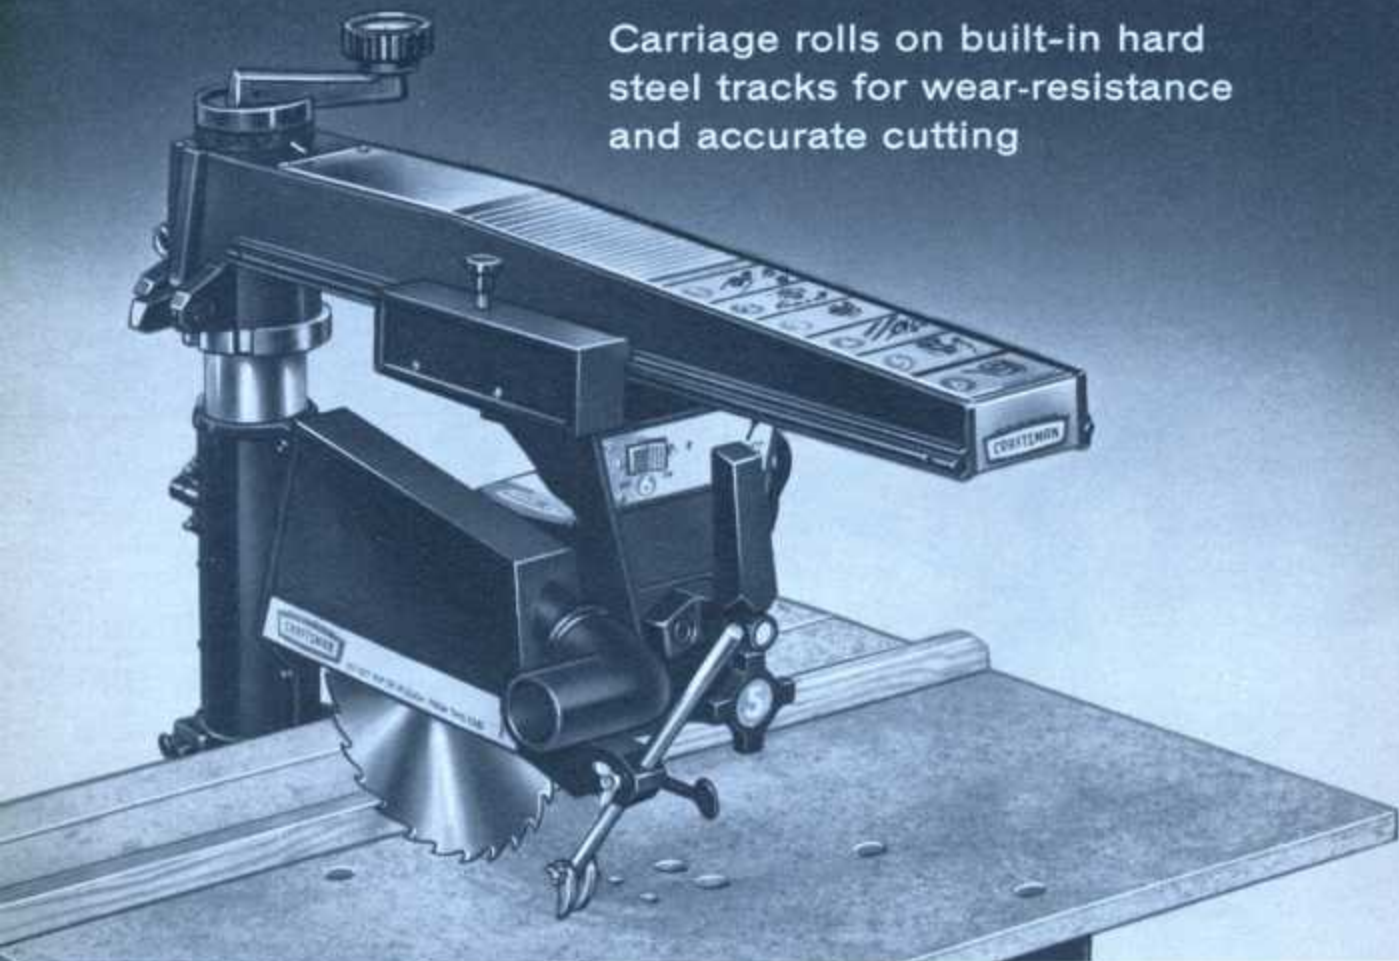

\$159⁹⁵ without stand

- Direct drive motor delivers full power . . no belts, pulleys or gears
- On-off switch has key lock for added safety when tool is unattended
- Convenient color-coded controls make set-ups simpler and speedier
- Power-unit carriage glides easily on permanently lubricated ball bearings . . exceptionally accurate for intricate woodworking jobs

Lightweight and portable . . yet with the accuracy and ruggedness necessary for professional applications. A superb, precision built tool with many, many uses . . see the accessories listed on page 3.

Automatic thermal overload protector resists the damaging effects of motor burnout. Full ¾-inch arbor . . back-end has regular ½-inch x 20-thread to take standard accessories without using an adapter. Designed to cut from the top so your layout marks are always in full view. Anti-kickback device.

Ball-bearing epoxy-insulated capacitor start motor. Operates on 110-120-volt, 60-cycle AC, UL listed. 9-inch Kronedge combination blade. Stand not included (see stands listed on page 3).

Shipping weight 94 pounds
99 KT 2935N—\$8 monthly Cash \$159.95

Manual Brake for 9-inch radial-arm saw above. Stops blade in less than 15 seconds.

9 KT 29356—Shipping weight 14 ounces . . . \$4.99



Dust Collector for Radial-arm Saws. See description on page 17.
99 KT 16995C—Wt. 19 lbs. \$49.99

No Money Down on anything Sears sells

SEE PAGE 90

SPECIFICATIONS

- Motor Develops 1¾ HP, 3450 RPM
- Blade size 9-inch x ¾-inch center hole
- Depth of cut (max.) . . . 2¼ in.
- Depth of cut 45° (max.) . 2 in.
- Width of crosscut (maximum) in 1-inch stock . 15¼ inches
- Width of rip (maximum) . . . 25¾ inches
- Height adjustment . . 7 inches
- Dado size . 7-in. diam. x 1¾ in.
- Dado depth (max.) . . 1½ in.
- Miter index stops Arm rotates 360°; fixed stops at 0° and 45° left or right
- Yoke . . . Swivels 180° right or left with fixed stops at 0° and 90° left or right
- Scales Miter, bevel
- Bevel index Motor tilts 180° with fixed stops at 0°, 45° and 90° left or right
- Table Resin bond chipboard. 21½x32x¾ in.
- Column diameter . . 2½ inches
- Distance from column center to arm end . . . 26¾ inches
- Over-all size . . 27¾ in. high, 32 in. wide, 31½ in. long

There are over 2,000
square inches of
working area



Complete Outfit
\$299⁰⁰

This **CRAFTSMAN** 12-inch Floor Saw can cut
 $3\frac{3}{16}$ in. deep and accurately rip through the center
of a 6-ft. wide panel . . . that's why we call it
COMMERCIAL DUTY

- Complete Outfit includes saw, motor, support legs and 3 extensions
- 3450-RPM capacitor motor develops 3 HP . . . direct drive for positive power
- Electro-magnetic brake stops motor automatically
- Micro-adjustment knob aligns rip fence exactly and quickly

Our finest . . . with the massive power and extra capacity needed for big production jobs in construction and all types of industrial woodworking applications.

You get plenty of space to handle large, hard-to-manage sheets. Two 10-in. grid-type extensions and one adjustable extension with extra rip fence let you make accurate cuts to the center of a 76-inch work piece. With extra rip fence lowered there's almost no limit to the size of work you can handle. 13 $\frac{3}{4}$ inches ahead of blade at maximum cutting depth.

Positive locking controls for precision cuts and fast set ups. Rip fence locks at front and rear . . . aligns exactly to desired cut. No need for trial runs. All controls conveniently placed in front and they're color coded for quick recognition. Basic operating instructions indicated on front panel.

Heavy-duty cast-iron internal construction and sturdy steel support legs. Two permanently lubricated ball bearings. Motor has thermal overload protector and epoxy-insulation for longer life. Built-in sawdust collector for use with Home-n-Shop Vac.

Includes: 12-in. taper-ground Kromedge combination blade ($\frac{1}{8}$ -in. center hole). See-through plastic blade guard with splitter, pawls. On-off switch located in front. Miter gauge with stops at 0° and 45°, right and left. 8-ft., 3-wire cord, adapter. For 110-120 or 230-v, 60-c AC, UL listed (Industrial Standards).

99 KT 2995N—Ship. wt. 240 lbs. \$14.50 mo. Cash \$299.00

Dado Insert for 12-in. saw. Wt. 2 lbs. 4 oz.
9 KT 29931 \$3.49

Molding Head Insert for 12-in. saw. Wt. 2 lbs. 4 oz.
9 KT 29932 \$3.49

SPECIFICATIONS

- Depth of cut (maximum) . . . $3\frac{3}{16}$ inches
- Blade type Kromedge, free-cut, taper-ground combination
- Blade size 12-in. (diameter ($\frac{1}{8}$ -in. center hole))
- Blade speed 10,800 peripheral ft. per min. (apprx.)
- Blade tilt 45 degrees
- Distance in front of blade . . . (at full depth) . . 13 $\frac{3}{4}$ in. (at 1-in. depth) . . 16 $\frac{1}{4}$ in.
- Table size . . . 20 inches wide, 27 inches long
- Base size . . . 18 inches wide, 19 $\frac{1}{4}$ inches long
- Over-all height 35 in.
- Over-all width . . . 57 inches, fully extended
- Over-all length . . . 36 $\frac{3}{4}$ in.
- Length of fence . . . 33 $\frac{1}{4}$ in. (30-inch work face)
- Dado capacity (using 8-inch dado set) . . . 1 inch wide, 1 $\frac{1}{2}$ in. deep

Saw Attachment



1 CRAFTSMAN Hold-down, bench, radial-arm saws, shop and joiners. With four steel fingers, two clamps, two L-rods.
9 KT 3230—Wt. 2 lbs. 11 oz. . . . \$2.99

2 Miter Gauge Stop Rods.
9 KT 29929 below; former 9-29929
9 KT 29924—Wt. 1 lb. 4 oz. . . . \$1.99

3 CRAFTSMAN Miter Gauge, Adjustable; stops at 45° and 90°. slide for most saws with $\frac{1}{8}$ x $\frac{3}{8}$ miter slot. Fits saws on pgs. 6, 7 and (except 99KT3421K2) and most forer saws. Also fits disc sander 99-2254L; band saw 99KT2426L; shaper 99KT2394N.
9 KT 29920—Wt. 4 lbs. 5 oz. . . . \$14.99

4 Hold-down Clamp, For (3) above. Automatic release.
9 KT 29928—Wt. 2 lbs. 5 oz. . . . \$2.99

CRAFTSMAN 10-inch Tilting-arbor Bench Saw

Professional quality... micro-adjustment on fence assures extra cutting precision

SPECIFICATIONS

- Depth of cut (max.)... 3 3/4 in.
- Blade type... Kromedge®, free-cut, taper-ground combination
- Blade size... 10-inch diameter (5/8-inch center hole)
- Blade speed... 9,000 peripheral feet per minute (approximate)
- Blade tilt... 45 degrees
- Distance in front of blade (at full depth)... 13 inches (at 1-in. depth)... 15 1/4 inches
- Table size... 20 inches wide, 27 inches long
- Base size... 15 1/4 inches wide, 19 1/4 inches long
- Over-all height... 15 inches
- Over-all width... 23 1/4 inches
- Over-all length... 28 inches
- Length of fence... 34 inches (32 1/2-inch work face)
- Dado capacity (using 7-inch dado set)... 1 3/4 in. wide, 1 1/2 inches deep
- Motor pulley (incl.)... 2 3/4 in.
- Machine pulley (incl.)... 2 3/4 in.
- V-belt (included)... 41 inches long, 1/2 inch wide



A mere twist of a micro-adjustment knob aligns fence exactly to desired cut. Never any guessing or trial runs.

Without blade-guard, stop rods, hold-down, motor, stand or table extensions

\$124⁹⁵

and Accessories

Designed to meet the precision requirements of craftsmen and home workshop owners alike. Cuts through wood up to 3 3/4 inches thick. Extra-large 27-inch deep, 20-inch wide work area. 13 inches in front of blade at maximum depth of cut.

Pre-tensioned controls hold depth and angle settings... no readjusting for repeated cuts. Fine Acme threads for precision adjustments. Two sealed, permanently-lubricated ball bearings.

Pick-off type rip fence removes at any point. One lever locks fence against table (not guide bar) at front and rear simultaneously... stays rigid for extra accuracy. Fence can be used on either side of blade.

Motor, blade and belt tilt together to eliminate belt twisting for positive power transmission. Positive tilt stops at 45° and 90°. Motor mount floats; belt stays rigid and taut. Tension device between motor-mounting plate and support reduces vibration of motor.

Table has pre-tapped holes conveniently located for mounting switch 9KT1208 listed at right. With aluminum miter gauge, motor mount, machine and motor pulleys and V-belt. No motor, blade guard, extensions, stop rods, hold-down or stand. Shpg. wt. 135 lbs. 99 KT 2990N—\$6.50 monthly. Cash \$124.95

Saw above with CRAFTSMAN 1-HP capacitor-start motor, 3450 RPM. Sleeve bearings. For 110-120-v, 60-c AC, 4-ft., 3-wire cord. Shipping weight 161 pounds. 99 KT 1343N2—\$8.00 monthly. Cash \$159.95

20-inch Adjustable Table Extension.

9 KT 2178—Shipping weight 13 lbs... \$15.99

10-inch Grid-type Table Extension. Use on either side of saw. With bolts and rip fence rack extension.

99 KT 29927C—Shpg. wt. 9 lbs. 4 oz. \$17.99

CRAFTSMAN Pedestal-type Tool Stand (shown on saw). Steel column—3 1/2-in. diam., 21 in. long. Four caster holes.

99 KT 2228L—Shpg. wt. 60 lbs. \$32.99

Package of 4 Casters. For stand above.

9 KT 2819—Shpg. wt. 1 lb. 7 oz. Pkg. \$5.99

Blade Guard with splitter and pawls. Automatic-leveling guard tilts with blade. Extra-tough clear plastic body.

9 KT 29926—Shpg. wt. 4 lbs. 4 oz. \$13.99

Dado Insert. Takes up to 7-in. dado blade.

9 KT 29921—Shipping weight 1 lb. \$2.99

Molding Head Insert. Set screw adjustment.

9 KT 29922—Shipping weight 1 lb. \$2.99

On-off Rocker Switch. Specially recommended for bench power tools. Handles Sears motors to 1 HP, universal motors to 1 1/2 HP. 3-prong adapter. For 110-120-volt, 15-ampere AC. 8-foot cord included.

9 KT 1208—Shpg. wt. 1 lb. 6 oz. \$6.99

As above but with 2 outlets.

9 KT 12085—Shpg. wt. 1 lb. 10 oz. \$8.99

CROWN
REBUILT

Sears

7

CRAFTSMAN 8-inch Tilting-arbor Bench Saw

Cuts through wood up to 2 1/2 in. thick... large 17x20-in. table area



No Money
Down
on anything
Sears sells

SEE PAGE 90

Without blade-guard,
hold-down, stop-rods,
extensions or stand

\$89⁹⁹

Simply lower, raise or tilt blade as needed. Separate tilt and depth controls. Self-aligning rip fence clamps prior to final clamp. Pick-off type fence removes at any point. Easy to read tilt indicator. Miter gauge turns 90° to 30°, right, left.

Motor rides horizontally on self-aligning motor mount. (Use minimum of 1/4-HP, 3450-RPM motor.) With rip fence, machine and motor pulleys, V-belt. Without blade guard, motor, extensions, hold down, stop rods or stand.

99 KT 2428N—Shipping weight 77 lbs. \$5.00 monthly... Cash \$189.99

Saw Outfit. 1/4-HP capacitor motor. Sleeve bearings. For 110-120-v., 60-c. AC. 4-ft. cord.

Shpg. wt. 101 lbs. \$6.00 mo.
99 KT 1346N2... Cash \$114.95

20-in. Adjustable Extension.
99 KT 2178—Wt. 13 lbs. \$15.99

8 1/2-inch Grid-type Extension.
99 KT 24297—Wt. 7 lbs. \$11.99

Steel Dado Insert.
99 KT 24291—Wt. 1 lb. 2 oz. 2.19

Molding Head Insert.
99 KT 24292—Wt. 1 lb. 2 oz. 2.19

Blade Guard with splitter, pawls.
Shipping wt. 3 lbs. 3 oz.
99 KT 24296... \$7.99

Pedestal Stand for above. Cast iron. Fits most 8, 9 and 10-inch CRAFTSMAN bench saws.
99 KT 2228L—Wt. 60 lbs. \$32.99

Ball-bearing Casters. Pkg. of 4. For stand above. Wt. 1 lb. 7 oz.
99 KT 2819... Pkg. \$5.99

SPECIFICATIONS

- Depth of cut (maximum)... 2 1/4 inches
- Blade type... Kromedge, chisel-tooth combination
- Blade size... 8-inch diameter (3/4-inch center hole)
- Blade speed... 9000-10000 peripheral ft. per min.
- Distance in front of blade... (at full depth) 10 1/4 in. (at 1-in. depth) 12 1/4 in.
- Table size... 17 inches wide, 20 inches long
- Base size... 15 in. wide, 17 1/2 inches long
- Over-all height... 11 1/2 in.
- Over-all length... 22 in.
- Over-all width... 20 1/2 in.
- Length of fence... 25 in. (23-inch work face)
- Dado capacity (using 6-inch dado set)... 3 3/8 in. wide, 1 1/8 in. deep
- Motor pulley (incl.)... 2 1/2 in.
- Machine pulley (incl.)... 2 in.
- V-belt (included)... 1/2x29 in.

CRAFTSMAN REG. U.S. PAT. OFF. Power Shop Combination

Saw, joint, plane
with one unit



\$209⁹⁵
without blade guard

8-inch Bench Saw with jointer-planer attachment plus fence, table-extension, stand and motor

Buying this combination costs far less than separate tools with individual motors and stands. You get the CRAFTSMAN 8-in. tilting-arbor bench saw described at left plus 4 1/2-in. jointer-planer attachment with tilting fence; 20-in. adjustable extension; pedestal stand and 1/4-HP, 3450-RPM sleeve-bearing capacitor motor for 110-120-volt, 60-cycle AC. 4-foot cord included.

Complete Outfit. Includes everything above. Without saw-blade guard, 99 KT 13445N6—Shipping weight 210 lbs. \$10.00 monthly. Cash... \$209.95

Jointer-Planer Attachment only. For 99 KT 2428N at left and former bench saws 99-2218, 99-2104, 99-2217. Without tilting fence, 99 KT 2184K—Shipping weight 31 pounds. \$5.00 monthly... Cash \$49.99

Tilting Fence only. For jointer-planer attachment. Adjustable.
99 KT 2181—Shipping weight 4 pounds 7 ounces... 11.99

Saw-blade Guard Assembly. With splitter and pawls.
99 KT 24296—Shipping weight 3 pounds 3 ounces... 7.99



Compact 7 1/2-inch Tilting-arbor Bench Saw

Complete with built-in, 3450-RPM capacitor motor that develops 1 HP **\$69⁹⁹** without stop rods

Cuts through wood up to 1 1/2 in. thick. You get a work space 26 in. wide and 14 in. long with the extensions included. 7 1/2-in. Kromedge chisel-tooth combination blade (3/4-inch center hole) tilts to 45°. 6 1/4 inches in front of blade at maximum depth of cut; 6 1/4 inches at 1-inch depth of cut. Dado capacity with 6-inch dado set: 3/8 inches wide, 1 1/4 inches deep. Direct drive ball-bearing motor with thermal overload protector. Table size: 14x14 in. Over-all dimensions: 26 in. wide, 18 1/4 in. long. 18-in. rip fence has 15-in. work face.

Includes: Two 6-inch grid-type extensions. Aluminum blade guard with swing-away action. Convenient side-mounted on-off switch. 6-ft. 3-wire cord and adapter. For 110-120-volt, 60-cycle AC. UL listed (Industrial Standards).
99 KT 2421K2—Shipping weight 31 pounds... \$69.99
99 KT 24212—Molding Head Insert. Shipping weight 6 ounces... 1.19
99 KT 24211—Dado Insert. Shipping weight 6 ounces... 1.19
99 KT 24214—Stop Rods. Shipping weight 9 ounces... 1.99



Just dial width of groove desired with

CRAFTSMAN Adjustable Dado \$19.99

Precision-cut adjustable hub lets you dial width in 16ths from $\frac{1}{8}$ to $\frac{1}{2}$ inch without removing dado from saw. Calibrated in 16ths in. Maximum depth of cut is 2 inches. Once dado is set following cut will not vary. Use to plough, dado, lap, groove, joint and rabbet.

7-inch tempered, selected tool steel blade. 8 precision-ground carbide-tipped teeth... bevel ground on front face for free cutting on plywood, and crosscutting on all solid woods. Also use on Formica® laminated plastic, laminates and sensitive materials. $\frac{5}{8}$ -inch arbor with $\frac{1}{2}$ -inch bushing for use on 8, 9, 10, 12 and 14-in. radial arm and bench saws.

9 KT 3267—Shipping weight 2 lbs. 12 oz. \$19.99



1



2



3

CRAFTSMAN Dado Sets with Kromedge Blades

Stay sharp up to 5 times longer than ordinary blades

Chrome-nickel-moly steel... extra tough, resists rust. Kromedge blades for clean cutting... long service. Precision-ground blades for accuracy. Matched chippers for years of smooth cutting.

1 Professional-quality satin-cut Dado Sets. Our best... even cut fine veneers and other sensitive materials. Also for plywood. Practically no splintering... straight, smooth sides. Outside cutters taper-ground for proper clearance, accurate tooth alignment. Two $\frac{1}{2}$ -in. outside cutters, four $\frac{1}{4}$ -in. chippers, one $\frac{1}{4}$ -in. chipper. For radial-arm and bench saws.

7-inch Set. Dadoes to $\frac{1}{4}$ in. deep, $\frac{1}{2}$ in. wide, $\frac{5}{8}$ -in. arbor. 9 KT 3257—Shipping weight 4 pounds 12 ounces. Set \$24.99

6-inch Set. Dadoes to $\frac{1}{4}$ in. deep, $\frac{1}{2}$ in. wide, $\frac{5}{8}$ -in. arbor. 9 KT 3270—Shipping weight 3 pounds 4 ounces. Set \$19.99

2 8-inch heavy-duty Set. For extra-tough jobs on bench, radial arm or swing saws. Includes six $\frac{1}{2}$ -in. chippers, two outside cutters $\frac{1}{2}$ in. thick. Fits $\frac{3}{8}$ -in. round arbor. Paper washers included for width adjustments by $\frac{1}{4}$ inch. 9 KT 32473—Shipping weight 6 pounds 8 ounces. Set \$19.99

3 6-inch Set. Four chippers $\frac{1}{4}$ in. thick, one $\frac{1}{4}$ in. thick. Two $\frac{1}{4}$ -in. thick outside cutters. For radial-arm, bench saws.

Fits $\frac{1}{2}$ -inch round arbor. 9 KT 3248—Shipping weight 3 pounds 2 ounces. Set \$9.99

Fits $\frac{3}{8}$ -inch round arbor. 9 KT 3249—Shipping weight 3 pounds 4 ounces. Set 9.99



CRAFTSMAN Dado Set for electric Hand Saw \$12.99

3 3/8-inch Set. Even cuts fine veneers and other sensitive materials. Kromedge blades. Two $\frac{1}{2}$ -in. chippers, one $\frac{1}{4}$ -in. chipper, two $\frac{1}{4}$ -in. outside cutters. Width of cut $\frac{1}{4}$ to $\frac{3}{4}$ in. Max. depth $\frac{1}{4}$ in. Includes mounting hardware. Shpg. wt. 1 lb. 8 oz. 9 KT 3268..... Set \$12.99

CRAFTSMAN Molding Heads For bench and radial-arm saws

3-cutter design for
much smoother and
faster work



**4 3/8-inch cutting diameter...
best for 8 and 9-inch saws**

21-piece set. Includes 18 bits (six 3-piece sets) to cut six patterns A through F below, wrench, spacer washer, bushings, plastic case. Use bits in combination to make many more patterns. (Fits $\frac{1}{4}$, $\frac{3}{8}$ or $\frac{1}{2}$ -inch round arbors.)

9 KT 3221—Shipping weight 2 lbs. 4 oz. Set \$19.99

Cutter-head only. Without bits (see bits below).

9 KT 3200—Shipping weight 1 lb. 7 oz. 4.99


**7-inch cutting diameter...
best for 10 and 12-inch saws**

Cutter-head only. Without bits (see bits below). Card-board case. (Fits $\frac{1}{4}$ and $\frac{3}{8}$ -inch round arbors.)

9 KT 3214—Shipping weight 2 lbs. 10 oz. \$6.99

Cutter-bit Sets. Bits 1 in. wide, 3 in each set. Shpg. wt. 5 oz. (except 9 KT 3203, six-bit set, wt. 7 oz.).

Illustr.	Cut. No.	Type of Cut	Set
(A)	9 KT 2353	Cabinet Door Lip	\$2.99
(B)	9 KT 2353	Base Molding	2.99
(C)	9 KT 3201	Glue Joint	2.99
(D)	9 KT 2352	3 bead $\frac{1}{4}$ inch each	2.99
(E)	9 KT 3212	$\frac{1}{8}$ -inch Cove and Bead	2.99
(F)	9 KT 2302	$\frac{1}{8}$ -inch Planer and Joints	2.99
(G)	9 KT 3211	Window Sash	2.99
(H)	9 KT 3204	90° Flute	2.99
(I)	9 KT 3210	Panel Copboard Door	2.99
(J)	9 KT 3206	1-inch Flute $\frac{1}{2}$ -inch radius	2.99
(K)	9 KT 3207	$\frac{1}{4}$ -in. Qtr. Round, $\frac{1}{4}$ -in. Cove (Drop leaf)	2.99
(L)	9 KT 3208	$\frac{1}{4}$ -in., $\frac{1}{8}$ -in. Quarter Round, $\frac{1}{4}$ -in. Bead	2.99
(M)	9 KT 2354	Clover Leaf and Screen Molds	2.99
(N)	9 KT 3202	"Queen" Window and Door Stop	2.99
(O)	9 KT 3203	$\frac{1}{4}$ -inch Flute and $\frac{1}{2}$ -inch Cove	2.99
(P)	9 KT 3209	$\frac{1}{4}$ -inch Cove	2.99
(Q)	9 KT 3251	$\frac{1}{4}$ -inch and $\frac{1}{2}$ -inch Quarter Round	2.99
(R)	9 KT 3205	Curved Flute and $\frac{1}{4}$ -inch Quarter Round	2.99
(S)	9 KT 2303	Tongue-Groove. Has 6 bits	5.99

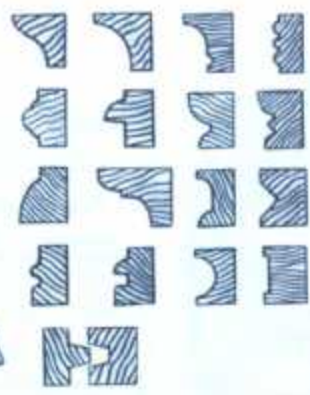

CRAFTSMAN single-cutter Molding Head Set for bench and radial-arm saws

21-piece set **\$23.99**

5 5/8-inch cutting diameter... best for 9 and 10-inch saws

21-piece set. Includes 18 single bits which permit you to make 18 different designs of trim, molding and joints (see designs above). You can also use bits in combination to make many more designs.

This set is designed for Sears radial-arm and bench saws, but it will also fit other saws with $\frac{3}{8}$ or $\frac{1}{2}$ -inch arbor.

Bits can't turn in cutter head... stay

in perfect alignment at all times. Operates chatter-free; turns out trim or moldings uniform in shape and size.

Set includes cutter-head, 18 bits, wrench, spacer washer, bushing and instructions. Comes complete with sturdy case that folds into 5 3/4 x 8-inch size or hangs on the wall.

9 KT 3215—Shpg. wt. 3 lbs. Set \$23.99

CRAFTSMAN Kromedge Blades

REG. U.S. PAT. OFF.

Stay sharp 5 times longer than ordinary blades

Sears exclusive "Free-Smooth Cut" and "Free-Cut" designs (on three blades at left) give you real sawing efficiency

"Free-Smooth Cut" Combination Blade

1 Deep hollow ground for freer cutting... stabilizer slots and holes give free, accurate and quiet operation even in tough wood, plastics. Prevents warping and distortion from heat.

Extra-heavy center for stability... helps blade give "blue-joint" cuts (need no sanding). Chrome-nickel-molybdenum steel, tempered, tensioned. Resists build-up of gum, pitch. For fine-finish woodwork, ripping, crosscutting, mitering. Teeth need no set. $\frac{3}{8}$ - $\frac{1}{2}$ -in. hole* except 10- and 12-inch have $\frac{5}{8}$ - $\frac{1}{2}$ -in. hole*.

Cat. No.	Diameter	Gauge Taper	RPM	Shpg. wt.	Price
9 KT 32641	6 in.	15-18	5080-7640	10 oz.	\$3.49
9 KT 32649	6½ in.	15-18	4700-7200	11 oz.	3.69
9 KT 32642	7 in.	15-18	4350-6550	14 oz.	3.99
9 KT 32644	8 in.	15-18	3820-5730	1 lb.	4.99
9 KT 32645	9 in.	14-17	3400-5090	1 lb. 6 oz.	5.99
9 KT 32646	10 in.	13-16	3050-4580	1 lb. 10 oz.	7.99
9 KT 32647	12 in.	12-16	2540-3820	2 lbs. 15 oz.	11.99

"Free-Cut" Rip and Combination Blades

(2 and 3) Taper-ground and set for faster, freer cutting. Heavy center for great stability. Tempered and tensioned. Highest quality chrome-nickel-molybdenum saw steel.

2 "Free-cut" Rip-tooth.

Cat. No.	Diam. inches	Teeth	Gauge	Center hole, in.*	RPM	Shpg. wt. lbs. oz.	Price
9 KT 32621	6	30	18	$\frac{3}{8}$ - $\frac{1}{2}$	5080-7640	10	\$2.19
9 KT 32629	6½	30	18	$\frac{3}{8}$ - $\frac{1}{2}$	4700-7200	11	2.49
9 KT 32622	7	30	18	$\frac{3}{8}$ - $\frac{1}{2}$	4350-6550	12	2.69
9 KT 32624	8	36	18	$\frac{3}{8}$ - $\frac{1}{2}$	3820-5730	1	2.99
9 KT 32625	9	36	16	$\frac{3}{8}$ - $\frac{1}{2}$	3400-5090	1	3.29
9 KT 32626	10	36	16	$\frac{3}{8}$ - $\frac{1}{2}$	3050-4580	1	3.69
9 KT 32627	12	30	12	$\frac{3}{8}$ - $\frac{1}{2}$	2540-3820	2	5.99

3 "Free-cut" Combination. Crosscuts and miters. Also can be used for ripping on furniture woods and trim.

Catalog Number	Diam. inches	Gauge	Center hole, in.*	RPM	Shpg. wt. lbs. oz.	Price
9 KT 32631	6	18	$\frac{3}{8}$ - $\frac{1}{2}$	5080-7640	9	\$2.59
9 KT 32639	6½	18	$\frac{3}{8}$ - $\frac{1}{2}$	4700-7200	10	2.99
9 KT 32632	7	17	$\frac{3}{8}$ - $\frac{1}{2}$	4350-6550	12	3.19
9 KT 32633	7½	15	$\frac{3}{8}$ - $\frac{1}{2}$	4190-6140	15	3.39
9 KT 32634	8	17	$\frac{3}{8}$ - $\frac{1}{2}$	3820-5730	1	3.49
9 KT 32635	9	16	$\frac{3}{8}$ - $\frac{1}{2}$	3400-5090	1	3.79
9 KT 32636	10	16	$\frac{3}{8}$ - $\frac{1}{2}$	3050-4580	1	3.99
9 KT 32637	12	12	$\frac{3}{8}$ - $\frac{1}{2}$	2540-3820	2	5.99

CRAFTSMAN Kromedge® Blades

REG. U.S. PAT. OFF.

They're made from extra tough chrome-molybdenum steel. Then they're specially chrome plated to make the surfaces super hard, extra resistant to rust. Tempered under pressure... evenly tensioned to run true, reduce wobble to a minimum. Accurately ground for maximum balance, too. No wonder they stay sharp up to 5 times longer than ordinary blades.

Kromedge Flat-ground Blades

4 Cabinetwork Combination. Extra-thin gauge. Makes almost invisible joints. Leaves no teeth marks. For 7 to 10-in. bench saws. $\frac{3}{8}$ - $\frac{1}{2}$ -in. hole*.

9 KT 32431—6½-in. diam. 52 teeth. Shpg. wt. 11 oz. \$2.29

9 KT 32432—9-in. diam. 56 teeth. Wt. 1 lb. 1 oz. 2.79

5 Nail-cutting Blade. Extra-hard alloy steel. Perfect for flooring and lumber salvage. Crosscuts and rips. $\frac{3}{8}$ - $\frac{1}{2}$ -in. round center hole*.

9 KT 32382—6½-in. diam. Shpg. wt. 10 oz. \$4.99

9 KT 32384—8-in. diam. Shpg. wt. 1 lb. 1 oz. 5.99

6 Chisel-tooth Combination. Beveled teeth. Crosscuts and rips.

Catalog Number	Diam. in.	Teeth	Center hole	Shpg. wt.	Price
9 KT 32401	4	30	$\frac{3}{8}$ - $\frac{1}{2}$ in.*	4 oz.	\$1.29
9 KT 32403	5½	24	$\frac{1}{2}$ -in. round	9 oz.	1.69
9 KT 32661	6½	20	$\frac{3}{8}$ -in. square	10 oz.	1.99
9 KT 32662	6½	20	$\frac{3}{8}$ -in. in.*	10 oz.	1.99
9 KT 32663	6½	24	$\frac{3}{8}$ -in. in.*	11 oz.	1.99
9 KT 32669	7	26	$\frac{3}{8}$ -in. in.*	15 oz.	2.19
9 KT 32665	7½	26	$\frac{3}{8}$ -in. in.*	15 oz.	2.29
9 KT 32666	8	28	$\frac{3}{8}$ -in. in.*	1 lb. 2 oz.	2.49
9 KT 32667	9	28	$\frac{3}{8}$ -in. in.*	1 lb. 8 oz.	2.99
9 KT 32668	10	28	$\frac{3}{8}$ -in. in.*	1 lb. 13 oz.	3.29
9 KT 32701	12	24	$\frac{3}{8}$ -in. in.*	2 lbs. 10 oz.	5.49

*NOTE: Round center hole knockout bushed for arbor sizes listed

Kromedge Thin-rim Blades

(7 and 8) For satin-smooth cuts in veneer, plywood. Taper-ground rim. Teeth need no set. Resist rust, pitch and tars.


Catalog No.	Diameter	Teeth	Shipping weight	Price
9 KT 32532	6½ inches	150	12 oz.	\$3.69
9 KT 32534	7 inches	200	15 oz.	3.99
9 KT 32537	8 inches	176	1 lb. 3 oz.	4.99
9 KT 32538	9 inches	200	1 lb. 10 oz.	5.99
9 KT 32539	10 inches	200	1 lb. 13 oz.	7.99

8 Cabinetwork Combination Blade. $\frac{3}{8}$ - $\frac{1}{2}$ -in. hole* except 10-in. has $\frac{3}{8}$ - $\frac{1}{2}$ -in. hole*.

9 KT 32541	6½ inches	52	12 oz.	\$3.69
9 KT 3254	8 inches	56	1 lb. 1 oz.	4.99
9 KT 32543	9 inches	64	1 lb. 9 oz.	5.99
9 KT 32544	10 inches	72	1 lb. 12 oz.	7.99

9 Fine-tooth Crosscut Blade for plywood. Cuts Celotex, veneers, etc. For electric hand, radial-arm and bench saws. 4-in. is for 5½-inch saw, ½-in. electric drill attachments.

Catalog No.	Diameter	Teeth	Center hole	Shipping weight	Price
9 KT 32441	4 in.	100	$\frac{1}{2}$ -in. round	5 oz.	\$1.49
9 KT 32442	6½ in.	150	$\frac{3}{8}$ - $\frac{1}{2}$ in.*	10 oz.	2.29
9 KT 32443	7 in.	200	$\frac{3}{8}$ - $\frac{1}{2}$ in.*	13 oz.	2.49
9 KT 32449	7½ in.	200	$\frac{3}{8}$ - $\frac{1}{2}$ in.*	14 oz.	2.59
9 KT 32447	8 in.	176	$\frac{3}{8}$ - $\frac{1}{2}$ in.*	1 lb. 3 oz.	2.79
9 KT 32448	9 in.	200	$\frac{3}{8}$ - $\frac{1}{2}$ in.*	1 lb. 8 oz.	3.09
9 KT 32446	10 in.	200	$\frac{3}{8}$ - $\frac{1}{2}$ in.*	1 lb. 12 oz.	3.49
9 KT 32444	12 in.	104	$\frac{3}{8}$ - $\frac{1}{2}$ in.*	3 lbs.	4.99

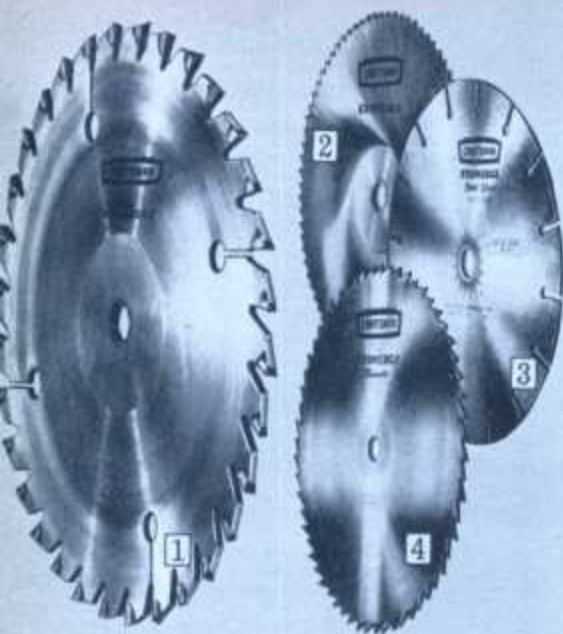

CRAFTSMAN Blades

REG. U.S. PAT. OFF.

For cutting metal, hardboard, waterproof plywood and wood laminates.

1 With carbide tips. For Masonite Presdwood®, hardboards, waterproof plywood and wood laminates. Our finest, strongest and sharpest. Specially treated Kromedge blades with carbide tips outlast ordinary blades up to 20 times. Precision, diamond-ground teeth are alternately beveled.

Catalog No.	Diam. in.	Center hole*	No. of teeth	Shpg. wt.	Price
9 KT 3259	8	5/8-1/2 in.	32	1 lb. 13 oz.	\$24.99
9 KT 3255	10	5/8-1/2 in.	40	2 lbs. 12 oz.	\$39.99

2 For copper, brass and aluminum. Kromedge blades of tempered alloy steel are treated for longer blade life.

Catalog No.	Diam. in.	Center hole*	No. of teeth	Shpg. wt.	Price
9 KT 32505	6 3/4	5/8-1/2 in.	80	10 oz.	\$4.99
9 KT 32506	8	5/8-1/2 in.	80	1 lb. 1 oz.	5.99
9 KT 32508	10	5/8-1/2 in.	100	1 lb. 12 oz.	8.99

3 For sheet-metal roofing and iron. Wear goggles when using. Kromedge blades of treated, tempered alloy steel.

Catalog No.	Diam. in.	Center hole*	No. of teeth	Shpg. wt.	Price
9 KT 32507	6 3/4	5/8-1/2 in.	80	10 oz.	\$2.99
9 KT 32502	8	5/8-1/2 in.	80	1 lb. 1 oz.	3.49
9 KT 32504	10	5/8-1/2 in.	100	1 lb. 13 oz.	4.99

4 For Masonite Presdwood®, hardboard, waterproof plywood. Kromedge blades of tempered chrome-nickel-moly steel are treated to outlast ordinary saw-blade steel by as much as 2 to 1.

Catalog No.	Diam. in.	Center hole*	No. of teeth	Shpg. wt.	Price
9 KT 3258	8	5/8-1/2 in.	60	1 lb. 9 oz.	\$2.99
9 KT 32585	10	5/8-1/2 in.	80	1 lb. 11 oz.	4.49

*NOTE: Round center hole is knockout bushed for arbor sizes listed



Disposable Blades

Use for framing cuts on timbers, 2x4's, etc. Not for finish cuts, trim, cabinetry. Flame-hardened, high-carbon steel chisel teeth, 17-gauge tempered body. Center hole knockout bushed for 5/8-1/2-inch arbor. Set and beveled. Can't be reset or filed. Black oxide finish.

6 1/2-inch diameter, 24 teeth. Shipping wt. 2 lbs. 15 oz. Package of 5.
9 KT 3261..... Pkg. \$4.99
7-inch diameter, 26 teeth. Shipping wt. 3 lbs. 12 oz. Package of 4.
9 KT 3251..... Pkg. \$4.99

Cut vibration and wobble with Blade Stabilizers

For 7 to 10-in. diameter blades. Ideal for carbide tipped and most regular blades. 4-inch diameter. Center hole knockout bushed for 5/8-1/2-in. arbor. Package of 2.

9 KT 4952—Wt. 1 lb. 6 oz., Pkg. \$2.49



CRAFTSMAN 8-tooth CARBIDE-TIPPED BLADES

Outlast non-tipped blades 20 to 1

Tungsten carbide is one of the hardest cutting materials made by man. That's why these blades cut so fast... stay sharp so long

Low as **\$7.99**

The cost of one CRAFTSMAN carbide-tipped blade is just a fraction of what you'd spend for the many non-tipped blades you would use during the life of your carbide-tipped blade. Cut smoother, feed more evenly. Take less power than regular blades.

Kromedge blades treated to resist rust and build-up of pitch and gums. Rip, cross-cut, miter and bevel. Cut woods, most plastics, Masonite Presdwood®, Formica® and other laminated plastics, asbestos, thin brass, aluminum, wallboard. (Not for masonry or ferrous metals.) Width of cut is about 1/4 inch.

8-tooth blades. (9 KT 32469, 12-inch diameter blade, has 12 teeth)

Cat. No.	Diameter	Center hole*	Shipping weight	Price
9 KT 32465	6 1/2 inches	5/8-1/2 inch	1 pound 5 ounces	\$7.99
9 KT 32461	7 inches	5/8-1/2 inch	1 pound 7 ounces	8.99
9 KT 32467	7 1/2 inches	5/8-1/2 inch	1 pound 12 ounces	9.49
9 KT 32454	8 inches	5/8-1/2 inch	2 pounds 4 ounces	9.99
9 KT 32457	9 inches	5/8-1/2 inch	2 pounds 6 ounces	10.99
9 KT 32468	10 inches	5/8-1/2 inch	2 pounds 10 ounces	11.99
9 KT 32469	12 inches	5/8-1/2 inch	3 pounds 3 ounces	18.99

*NOTE: Round center hole is knockout bushed for arbor sizes listed



CRAFTSMAN Gum and Pitch Remover. A thin coating of remover dissolves pitch and gum on circular or band saw blades, planer and jointer knives, shaper cutters and other wood-working tools. Inhibits rust. One pint.

Shpg. wt. 1 lb. 7 oz.
9 KT 49191..... 99c

CRAFTSMAN Saw-sharpening Vise. Holds circular saw blades. For blades from 5 1/2 to 12-in. in diameter.

Mounts in bench-saw miter slot up to 5 1/2 inch, or on work bench. Die-cast zinc. Steel bolt, wing nut and wrench.

Shpg. wt. 1 lb. 14 oz.
9 KT 3531..... \$2.99

CRAFTSMAN Circular Saw Blade-setter Set. Just a hammer tap sets teeth. For 4 to 12-in. blades with 1/2, 3/4, 1 or 1 1/2-in. center hole.

Steel anvil, plungers assure long-lasting accuracy. Die-cast zinc body parts. With wrench, four bushings, and instructions.

Shipping weight 14 ounces.
9 KT 3530..... Set \$2.99

CRAFTSMAN Circular Saw Sharpener Only \$19.99


• Re-tooths • Sharpens • Joins

Save yourself the time and money it takes to have your circular-saw blades sharpened and reconditioned in an outside shop. This professional-type sharpener pays for itself in service charges you save.

Designed to handle all regular-blade sizes up to 12-in. diam. Has grinding wheel bushed for 1/2 and 5/8-inch arbor hole. 2 index dials, safety guide for your protection.

Use with bench, radial-arm saws. Bushed for 1/2, 3/4, 1 and 1 1/2-in. round blade holes. Instructions are included.

9 KT 3532—Shipping weight 3 lbs., \$19.99

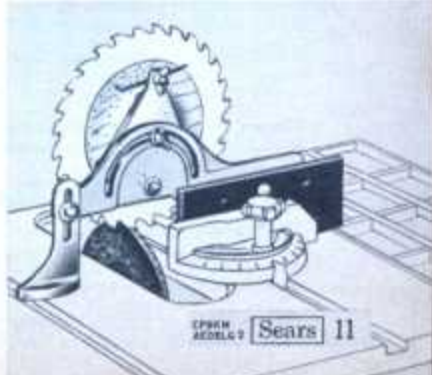

CPWHN AEBLL 9 Sears 11

CRAFTSMAN
REG. U.S. PAT. OFF.

2-wheel 12-inch Band Saw

Without motor,
belt guard or stand

\$112⁹⁵

SPECIFICATIONS

- Depth of throat... 12 inch
- Capacity of cut (maximum)... 6 inches
- Table size... 12 $\frac{1}{2}$ x14 $\frac{1}{4}$ in.
- Length of blade... 80 in.
- Width of blade... $\frac{1}{4}$ inch (takes $\frac{1}{8}$ - $\frac{1}{4}$ -in. width)
- Blade speed... travels 2165 feet per min.
- Machine pulley (included)... 5 inches
- Motor pulley (included)... 2 inches
- Motor recommended (minimum) $\frac{1}{2}$ HP at 1725 RPM
- Over-all size (without stand):
- Height... 34 $\frac{3}{8}$ inches
- Width... 14 $\frac{3}{8}$ inches
- Length... 22 $\frac{1}{4}$ inches
- Table tilts... 45 degrees
- Pre-lubricated bearings
- Cuts to center of 24-inch circle

CRAFTSMAN 18-inch
REG. U.S. PAT. OFF.
Commercial Band Saw

With gear
reduction unit,
for wood and metal

\$535⁰⁰

SPECIFICATIONS

- Depth of throat... 17 inches
- With shroud removed... 18 inches
- Capacity of cut (maximum)... 12 inches
- Table size... 20 $\frac{1}{2}$ x17 $\frac{1}{2}$ inches
- Blades... two 11 ft. ($\frac{1}{4}$ -in. metal cutting, $\frac{3}{8}$ -in. wood cutting)
- Bearings... 6 sets grease-sealed ball
- Size of each wheel... 18 inches
- Machine pulley (incl.)... 7 inch
- Motor pulley (incl.)... 3 inch
- Over-all: Height... 63 $\frac{1}{2}$ ft.; Width 22 $\frac{1}{2}$ in.; Depth 31 in.
- Motor (not incl.)... needs 1 HP 1725 RPM

Extra heavy duty. Saw blades easily and quickly changed. Built-in ball-bearing gear reduction assembly for 4 blade speeds, 118 to 3550 ft. per minute. Cuts to center of 36-in. circle in wood 12 in. thick. Table tilts to 45°, locks; 2 miter gauge slots. Miter gauge, saw guides, 2 rubber-tired ball bearing wheels. V-belt. Steel frame. Shipped freight (rail or truck) or express from Cincinnati, Ohio factory.
F9 KT 2358N—Shpg. wt. 494 lbs., \$535.00

Saw without gear reduction unit. One 11 ft. $\pm$ $\frac{3}{8}$ -inch wood-cutting blade. Comes without motor. For wood only. From Cincinnati, Ohio factory.
F9 KT 23585N—Wt. 461 lbs., \$445.00

Rip Fence for above. Shipped from Cincinnati, Ohio factory.
F9 KT 23586—Shpg. wt. 13 lbs., \$22.99

11-foot Blades for saw above. From factory in Boone, N. C. Postpaid.

For metal... Each \$4.39				For wood... Each \$2.79			
Width	Catalog No.	Teeth	Cuts Metal	Wt.	Catalog No.	Teeth	Wt.
$\frac{1}{8}$ -inch	F9 KT 27525	18 per in.	0 to $\frac{1}{4}$ in.	18 oz.	F9 KT 27511	6 per in.	15 oz.
$\frac{1}{4}$ -inch	F9 KT 27526	14 per in.	$\frac{1}{4}$ to $\frac{1}{2}$ in.	10 oz.	F9 KT 27512	8 per in.	16 oz.
$\frac{1}{2}$ -inch	F9 KT 27527	10 per in.	$\frac{1}{2}$ to 2 in.	12 oz.	F9 KT 27513	6 per in.	18 oz.
$\frac{3}{4}$ -inch	F9 KT 27524	8 per in.	2 in. up	14 oz.			

Band Saw Blades... low as \$1.69

Replacement band saw blades for use on wood, brass, non-ferrous metals or steel. Professional quality cuts exceptionally smooth and fast. Special alloy steel, heat treated and hardened. Precision ground for maximum life. Every blade is endless... set and filed for its recommended use.

Catalog Number	For Sawing	Width	Length	Shipping weight	Each
9 KT 26641	Wood/Skip...	$\frac{1}{4}$ inch	62 inches	5 ounces	\$1.69
9 KT 26642	Wood/Tooth...	$\frac{1}{4}$ inch	62 inches	5 ounces	1.69
9 KT 26571	Wood...	$\frac{1}{4}$ inch	78 inches	6 ounces	1.69
9 KT 26572	Wood...	$\frac{1}{4}$ inch	78 inches	6 ounces	1.69
9 KT 26573	Wood...	$\frac{1}{4}$ inch	78 inches	8 ounces	1.69
9 KT 26574	Wood...	$\frac{1}{4}$ inch	78 inches	8 ounces	1.69
9 KT 26231	Wood...	$\frac{1}{4}$ inch	80 inches	4 ounces	1.69
9 KT 26232	Wood...	$\frac{1}{4}$ inch	80 inches	4 ounces	1.69
9 KT 26233	Wood...	$\frac{1}{4}$ inch	80 inches	7 ounces	1.69
9 KT 26234	Wood...	$\frac{1}{4}$ inch	80 inches	8 ounces	1.69
9 KT 2668	Brass, non-ferrous metals...	$\frac{1}{4}$ inch	78 inches	7 ounces	1.79
9 KT 2624	Steel...	$\frac{1}{4}$ inch	80 inches	6 ounces	1.79
9 KT 2625	Steel...	$\frac{1}{4}$ inch	80 inches	8 ounces	3.49



Blade tension adjusts automatically as you saw... no more guesswork when cutting different materials. One-piece cover and frame. Drive shaft with 2 rows of ball bearings for accuracy. Blade tension release lever. Two rubber-tired ball bearing wheels. Miter gauge slot. (Order miter gauge below.) Easily positioned saw guide. $\frac{1}{2}$ x43-inch. V-belt included.

Without motor, belt guard or stand.

99 KT 2426L—Shipping weight 69 pounds... \$112.95

With CRAFTSMAN $\frac{1}{2}$ -HP, 1725-RPM sleeve-bearing split-phase motor (110-120-volt, 60-cycle AC) with 4-foot cord.

99 KT 24253L2—Shipping weight 87 pounds... \$124.95

CRAFTSMAN Cast-iron Tool Stand. Base measures 12x20 $\frac{1}{4}$ x5 inches. Tapped $\frac{1}{2}$ x13 threads. 2 $\frac{1}{4}$ -inch column. 26 inches high.

99 KT 2957L—Shipping weight 48 pounds... \$32.99

Casters for stand above. $\frac{1}{2}$ x13 threads. Package of 4.


9 KT 2819—Shipping weight 1 pound 7 ounces... Package 5.99

Belt Guard for band saw above.

9 KT 2907—Shipping weight 4 pounds 2 ounces... 6.49

CRAFTSMAN Miter Gauge. (Shown on page 6.) Adjusts to 30°. Positive stops at 45° and 90°. Bar slide for most saws with $\frac{1}{2}$ x $\frac{1}{2}$ -in. miter slots. Fits band saw 99 KT 2426L above.

9 KT 29929—Shpg. wt. 4 lbs. 5 oz... \$10.99

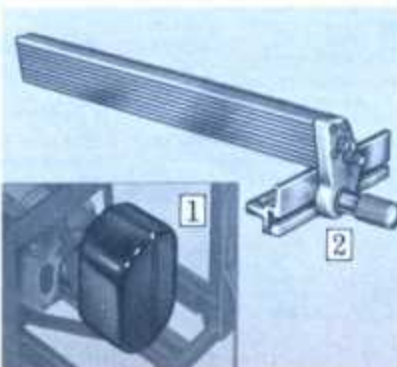

Slow-speed Converter

1 For 10 to 14-inch band saws with 1725-RPM motors, $\frac{1}{2}$ or $\frac{1}{4}$ HP, $\frac{1}{4}$ or $\frac{1}{2}$ -inch motor shaft. Blade speed cuts at 10:1 ratio. Cut steel, brass and other non-ferrous metals without damaging saw.
9 KT 2342—Wt. 6 lbs., \$34.99

Rip Fence for band saws

2 Rip planks and boards evenly at predetermined widths. Fits band saw 99 KT 2426L, at left. For best results use $\frac{1}{2}$ -inch blade. Locks solidly at front and rear... won't slip. Fittings included.
Shipping weight 4 lbs. 10 oz.
9 KT 23432... \$10.99



10-inch Hobby Jig Saw ideal for beginners

\$14.99

Use for making models, puzzles, furniture... make toys or household articles. So simple to use that a child can operate it. Exceptionally safe... it's almost impossible to get even a tiny scratch because stroke is so short and fast.

Rapid strokes of this well-made, rugged power tool leave almost no saw marks... leave little or no sanding to do. Powerful enough to do full-scale cutting in soft woods, plywood, Masonite Presdwood®, plastics, also thin aluminum, brass, copper, etc. Motor needs no oiling. No belts or pulleys; moving parts at a minimum for simplified operation and maintenance.

Blade return made of tempered spring steel automatically maintains correct cutting tension. Rubber feet absorb vibration. Table has 3/4-inch grid pattern which aids guiding and layout operation. UL listed, 6-foot 2-wire SJ cord, instructions, 2 blades.

9 KT 2478—Shipping weight 11 lbs. \$14.99

SPECIFICATIONS

- Depth of throat.....10 inches
- Depth of cut...1 inch max. (soft wood)
- Blade chuck.....stationary type
- Table size.....6 1/4 x 8 3/4 inches
- Motor (built in).....magnetic type, 110-120-volt, 60-cycle AC
- High speed stroke.....7200 per minute
- Bearings.....steel torsion
- Blades.....4-in. pin end (2 included)
- Dimensions.....height 7 1/4 inches; width 6 1/4 inches; length 14 1/2 inches.

CRAFTSMAN 18-inch Belt-driven Jig Saw

Just remove arm...
and use it as a
Sabre Saw!

\$69.99

without motor

Designed for intricate cornice work, cabinetry. Converts to sabre saw by simply removing arm. Big 12x12-in. table tilts 45° to left for mitering, beveling wood up to 2 in. thick... also cuts plastic and nonferrous metal. Uses plain-end 6-inch blade (1 included). Upper and lower guides have steel balls held by knurled cap to cut friction... less blade wear. Runs in oil bath for smooth, quiet operation. Built-in sawdust blower that keeps cutting line clear. With 2-inch motor pulley and 3/4x54-inch V-belt.

Resilient chuck shoe between blade and clamp cushions blade... helps prevent twisting, breaking. Guide is adjustable in all directions... always in exact alignment for maximum support when rotating blade for back-cutting or ripping pieces over 18 inches long. Cap floats radially for perfect vertical alignment.

Use minimum of 1/4-HP, 1725-RPM motor. Without motor. Sent freight (rail or truck) or express.

99 KT 2072N—Wt. 71 lbs. \$5 monthly. Cash \$69.99

Jig Saw with CRAFTSMAN 1/4-HP, 1725-RPM, sleeve-bearing split-phase motor (110-120-volt, 60-cycle AC), 4-foot cord included.


99 KT 20724N2—Wt. 89 lbs. \$5 mo. Cash \$84.99

SPECIFICATIONS

- Depth of throat.....18 inches
- Table size.....12x12 inches
- Sawdust blower.....built in
- Stroke.....1 inch
- Machine pulley (incl.) 4 inches
- Depth of cut (max.)...2 inches
- Bearings.....porous bronze
- Blade.....6-inch plain end
- Spindle speed approx.....875 RPM
- Motor pulley (incl.)...2 inches
- Motor recommended (minimum)...1/4-HP, 1725 RPM
- Mounting dimensions (three-point).....5 1/4 x 22 1/8 in.
- Over-all dimensions:
height.....18 inches
width.....12 inches
length.....29 inches

CRAFTSMAN Jig and Sabre-saw Blades of tough alloy steel... heat treated and hardened

Catalog Number	Length, inches	Width, inches	Thickness, inches	Teeth per in.	Recommended uses	Number in pkg.	Per pkg.
(Pin type blades)							
(1) 9 KT 2688	4	.062	.010	18	For wood and plywood. Fit magnetic or reciprocating motor jig saw.	8	39c
9 KT 2687	4	.082	.010	18	For wood and plywood. Fit magnetic or reciprocating motor jig saw.	8	39c
9 KT 26903	5	.095	.015	20	For wood, plastic, soft metal. Fit magnetic or reciprocating motor jig saw.	4	49c
(2) 9 KT 26923	5	.187	.015	15	For wood, plastic, soft metal. Fit magnetic or reciprocating motor jig saw.	4	49c
(3) 9 KT 27053	5	.110	.020	15	Medium for wood or metal.	4	49c
9 KT 27043	5	.110	.020	10	Coarsest for wood only.	4	49c
(Plain-end blades; for most jig saws)							
(4) 9 KT 27103	6	.110	.020	7	Heavy duty; for wood and metal.	5	49c
(5) 9 KT 27003	6	.110	.020	10	Coarse; for wood and soft metal.	4	49c
(6) 9 KT 27013	6	.110	.020	15	Fine; for wood and soft metal.	4	49c
(7) 9 KT 27023	6	.085	.020	16	Extra fine; for wood and soft metal.	4	49c
(8) 9 KT 27093	6	.110	.020	20	For thin sheet metals, including steel.	4	49c
(9) 9 KT 27035	6	.070	.020	32	For thin sheet metals, including steel.	4	49c
(Sabre-saw blades)							
(10) 9 KT 28673	6	.250	.028	20	For wood and metal.	3	49c
(11) 9 KT 28693	6	.187	.028	10	For wood and soft metal.	3	49c
(12) 9 KT 28663	6	.250	.028	7	For coarse cuts in wood.	3	49c

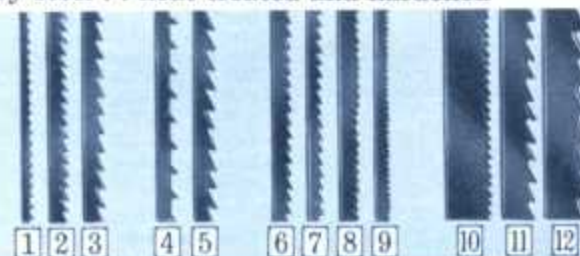

Professional-quality blades... made of special alloy steel, scientifically heat-treated and hardened for long use and fast, easy cutting. All blades listed are for use on jig saws. 6-inch plain-end blades can be snapped off to fit machines taking shorter plain-end blades. When cutting metal with blades indicated for metal cutting lubricate blade with beeswax. Sabre-saw blades can be used for heavy work, as well as sabre sawing on jig saws. Please order from table at left. Shipping weight per package 2 ounces.

No Money Down on anything Sears sells SEE PAGE 98

CRAFTSMAN

REG. U.S. PAT. OFF.

6 1/8-inch Jointer-Planer**\$149⁹⁵** without motor, stand or belt guard

Lets you cut truer joints and edges . . .
plane smoother . . . thanks to solid 1-piece
construction—and only Sears has it!

1 Fence extends full length of rear table, locks flush—stops at 45° and 90°. Handles 6-inch stock. Bearing housings are part of base casting. Depth of cut scale. 6 micro-adjustment screws align 3 alloy steel blades in steel cutter head for smooth lines. Rabbits to 1/2 inch deep.

Sealed ball bearings, permanently lubricated. 36-inch working area (front and rear table). 42 1/2 x 20 3/4 x 9 1/4 in. over-all. Machine and motor pulleys. V-belt. No motor, stand, belt guard. 99 KT 2062N—Shpg. wt. 122 lbs. \$7.50 monthly. Cash \$149.95

Jointer-Planer with motor. 1/2-HP, 3450-RPM. Sleeve-bearing capacitor type. With 4-foot cord. 110-120-volt, 60-cycle AC. 99 KT 2062N2—Shpg. wt. 141 lbs. \$8.00 monthly. Cash \$169.95

Extra Blades. For above. Package of 3. 99 KT 2293—Shipping weight 13 ounces. . . . Package \$5.99


2 Cast-iron Stand. For above. 99 KT 29602N—Shpg. wt. 71 lbs. \$5 monthly. Cash 49.99

Belt-bearing Casters. For 99 KT 29602N. Package of 4. 99 KT 2819—Shipping weight 1 lb. 7 oz. . . . Package 5.99

Belt and Pulley Guard. For 99 KT 29602N. 99 KT 29082—Shipping weight 4 lbs. 2 oz. . . . 7.49

SPECIFICATIONS

- Width of cut. . . . 6 1/8 in.
- Depth of cut (max.). 1/2 in.
- Front table. . . 16 3/4 x 7 3/4 in.
- Rear table. . . 17 3/4 x 6 3/4 in.
- Bearings. . . . 2 sets, ball
- Cutter knives. . . 3 alloy steel, 6 1/4 x 3 1/4 x 1/4 in.
- Recommended arbor speed. approx. 4500 RPM
- Motor recommended (min.). 1/2 HP, 3450 RPM
- Machine pulley. . . 2 inches
- Motor pulley. . . 2 1/2 inches
- V-belt. . . . 1/2 x 45 inches
- Mounting dimensions. . . 9 1/2 x 31 1/4 in.
- Over-all dimensions:
Height. . . . 9 1/4 inches
Width. . . . 20 3/4 inches
Length. . . . 42 1/2 inches

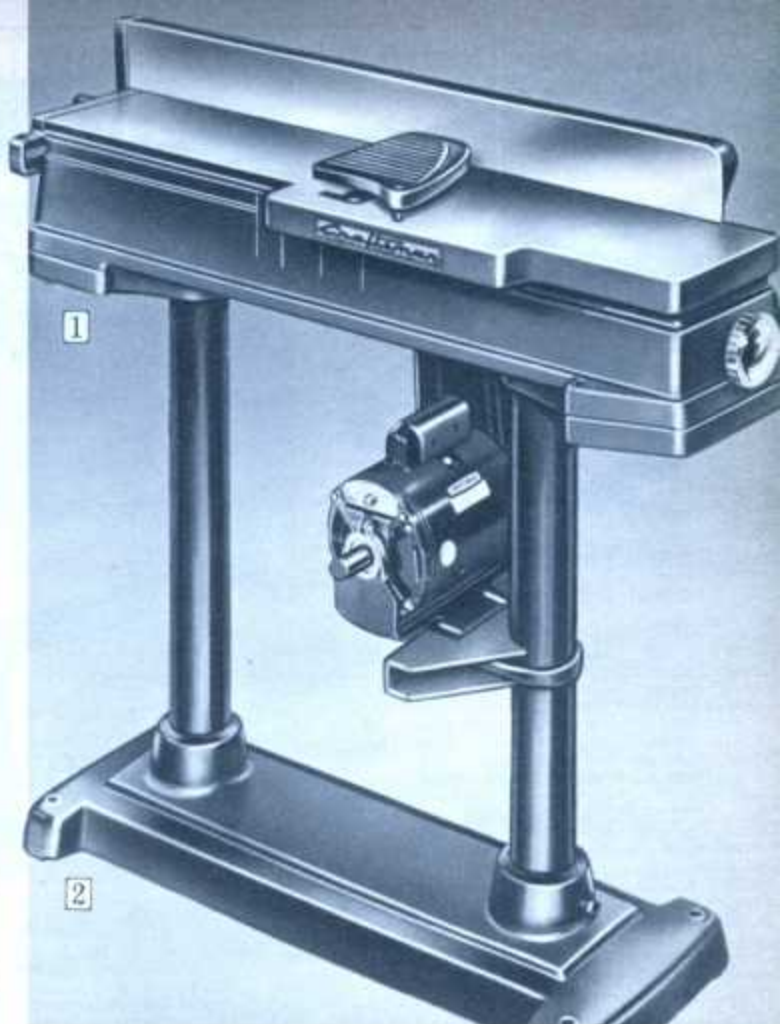**CRAFTSMAN**

REG. U.S. PAT. OFF.

4 1/8-inch Jointer-Planer

Fence lock handle minimizes annoying "whip." Semi-steel tables . . . front one adjusts. 3-point suspension for perfect alignment with cutter head. Removable spring-loaded guard. Steel cutter has three 4 1/8-inch blades.

Self-lubricating sleeve bearings for long life. Fence tilts 45° either side. 29 1/4 x 9 3/4 x 8 3/4 in. over-all. Machine and motor pulleys. V-belt. Without motor or stand (order stand 99 KT 10525K separately on page 29).

99 KT 2186L—Shpg. wt. 62 lbs. \$5 monthly. . . . Cash \$79.99

Jointer-Planer with motor. 1/2-HP, 3450-RPM. Sleeve-bearing capacitor type. With 4-foot cord. 110-120-volt, 60-cycle AC. 99 KT 2186L2—Shpg. wt. 81 lbs. \$5 monthly. . . . Cash \$99.99

Extra Blades. For above. Package of 3. 99 KT 21866—Shipping weight 6 ounces. . . . Package 3.99


SPECIFICATIONS

- Width of cut. . . . 4 1/8 in.
- Depth of cut. . . . 3/8 in.
- Fence length. . . 19 1/4 in.
- Spindle diameter. . . 3/5 in.
- Front table. . . 11 3/4 x 6 3/4 in.
- Rear table. . . 11 3/4 x 6 3/4 in.
- Cutter knives. . . three
- Bearings. . . . two; Self-lubricating sleeve-type
- Motor recommended (min.). 1/2 HP, 3450 RPM
- Pulleys: Machine. . . 2-in. Motor. . . . 2 1/2 in.
- V-belt. . . . 1/2 x 32 in.
- Recommended arbor speed. 4500 RPM

**\$79⁹⁹** without motor or stand**Convert 8-in. bench saw to jointer-planer**

3 Attachment fits bench saw 99 KT 2428N on page 8. Shpg. wt. 31 lbs. \$5 mo. 99 KT 2184K. . . . Cash \$49.99

4 Tilting Fence. For use with (3) described above. Shpg. wt. 4 lbs. 7 oz. 99 KT 2181. . . . \$11.99

**Use this Attachment to convert 10-inch bench saw to jointer-planer**

5 Fits bench saw 99 KT 2990N described on page 7. Comes with tilting fence. Adjustable. 99 KT 2180K—Wt. 37 lbs. \$5 monthly. Cash \$54.99

6 Knife-setting Gauge Set for jointer-planers. Accurately lines up blades after sharpening. Machined cast iron. Micrometer adjustments. Touch-up stone is included. 99 KT 2647—Shpg. wt. 1 lb. 13 oz. . . . Set \$7.99



CRAFTSMAN Planer-Molder

Planes and molds in one pass... or separately. Plane lumber up to 12 1/4-in. wide, 6-in. thick. 3 knives in ball-bearing 3 1/4-in. head. Mold edge and face up to 6-in. wide with molding bits (not incl.). Power feeds at 12 fpm, 42-in. bed. 3 1/2-in. machine pulley. Use 1 to 5-HP motor for 4000 RPM head speed. With stand below, takes 5-in. motor pulley and 56-in. V-belt for 2 HP 3450 RPM motor. Motor, stand, motor pulley, and V-belt not incl. Freight (rail, truck), express.

F9 KT 2339N—Wt. 220 lbs. \$14.50 mo. Cash \$299.00

Thickness Planer without molding features. 12 1/4 x 6-in. capacity. Has an 18-in. bed.
F9 KT 23394N—Wt. 201 lbs. \$13.00 mo. Cash \$269.00

Welded Steel Stand for above tools. 22 1/4-in. square top; 24 1/4-in. square bottom; 20 1/4-in. high.
F9 KT 23395N—Shipping weight 42 pounds... \$29.99

Molding Cutter Bits for F9 KT 2339N, 3 bits in each pattern (except Tongue-Groove Set). *Postpaid.*

F9 KT 23311—1-inch and 1/2-inch radius flute
F9 KT 23301—Ballstet
F9 KT 23308—Window, door stop
F9 KT 23305—3-bend
F9 KT 23309—90° flute
F9 KT 23304—Clover leaf
F9 KT 23302—Glue joint
F9 KT 23313—1/8-in. x 1/2-in. quarter-rod
F9 KT 23303—Base mold
F9 KT 23312—1/8-in. x 1/2-in. quarter-rod
(Shipping weight 3 ounces)... Price per set \$2.99

Tongue and Groove Molding Cutter Bits for F9 KT 2339N. Set of 6 bits. *Postpaid.*
F9 KT 23302—(Shipping weight 6 oz.)... Set \$5.99



CRAFTSMAN Wood Lathe with big 12-inch swing

Has exceptional work-load capacity for lathe in this price range... handles pieces of wood up to 37 inches long and up to 12 inches in diameter with accuracy even at high speeds!

without motor
motor pulley, V-belt, stand

\$66⁹⁹

Tough semi-steel head and tailstock. Permanently lubricated. Precision-ground steel-tubing bed is 45 1/4 in. long. Mount motor from headstock rear or below. 3/4 x 16-thread headstock spindle with indexing pin for fluting. Rigid 3-point mount. Two ball bearings on spindle. No. 1 Morse taper in headstock, tailstock. Steel key guides tailstock and tool rest. Double acting lock on tool rest holder and support. Four speeds (875 to 3450 RPM). 54 1/4-in. long overall. 12-in. graduated tool rest, spur, cup centers. 4-in., 4-step machine pulley. Manual. Without motor, motor pulley, V-belt. 3/4-HP, 1725-RPM motor recommended for this lathe. Shipped freight (rail or truck) or express.

99 KT 2388N—Shipping weight 60 pounds... \$5 monthly, Cash \$66.99

With CRAFTSMAN 1/2 HP, 1725-RPM, split-phase motor, 110-120-volt, 60-cycle AC with 4-foot cord, 4-inch, 4-step motor pulley, V-belt.

99 KT 23886N3—Shipping weight 80 pounds... \$5 monthly, Cash \$84.99

CRAFTSMAN Pedestal Stand. For above. 30 inches high. Steel columns.
99 KT 2249N—Shipping weight 74 pounds... \$5 monthly, Cash 42.99

SPECIFICATIONS

- Swing over bed... 12 in.
- Center to center... 37 in.
- Length of bed... 45 1/4 in.
- Spindle, inboard end... 3/4 in. x 16 R.H. thread with No. 1 Morse, female taper
- Ram travel... 1 1/4 in.
- Spindle speeds... 875, 1350, 2250 and 3450 RPM
- Spindle bearings... 2 sealed radial thrust ball
- Machine pulley (incl.)... 4-in., 4-step, V-type cone
- Mounting... 49 1/2 x 5 1/4 in.
- Tailstock taper... No. 1 Morse, female
- Motor pulley (not included)... 4-inch, 4-step, V-type cone
- Over-all size... 7 1/4 x 54 1/4 x 11 1/4 in. high



1 Work Arbors with Chucks. 3-jaw screw-on type. 1/2-inch capacity; 1/2-in. x 20-thread.
9 KT 2234—No. 1 Morse taper. Wt. 1 lb. 7 oz. \$2.99
9 KT 2247—No. 2 Morse taper. Wt. 1 lb. 9 oz. 2.99

2 Work Arbors. Two steel flanges; nut on head end for clamping wheels. 1/2-in. x 20-thread.
9 KT 2153—No. 1 Morse taper. Shpg. wt. 11 oz. \$1.79
9 KT 2152—No. 2 Morse taper. Shpg. wt. 15 oz. 1.79

3 Chuck Arbors. No. 1 Morse and No. 3 Jacobs taper.
9 KT 2123—Shipping weight 5 oz. \$1.99
No. 3 Morse and No. 3 Jacobs taper.
9 KT 2124—Shipping weight 8 oz. 1.49
No. 1 Morse and No. 3 Jacobs taper.
9 KT 2154—Shipping weight 8 ounces. 1.99
No. 2 Morse and No. 3 Jacobs taper.
9 KT 2126—Shipping weight 9 oz. 1.49

4 Screw Centers. For woodturning.
9 KT 2116—No. 1 Morse taper. Shpg. wt. 8 oz. 1.99
9 KT 2115—No. 2 Morse taper. Shpg. wt. 13 oz. 2.19

5 Ball-bearing 60° Centers. For hardwood, metal.
9 KT 2112—No. 1 Morse taper. Wt. 10 oz. \$4.19
9 KT 2113—No. 2 Morse taper. Shpg. wt. 12 oz. 4.19

6 Spur Centers. Use for wood turning.
9 KT 2106—No. 1 Morse taper. Shpg. wt. 5 oz. 1.59
9 KT 2107—No. 2 Morse taper. Shpg. wt. 8 oz. 1.79

7 Tailstock Cup Centers. For wood turning.
9 KT 2100—No. 1 Morse taper. Shpg. wt. 5 oz. 1.59
9 KT 2101—No. 2 Morse taper. Shpg. wt. 8 oz. 1.79

8 60-degree Centers. For metal turning.
9 KT 2110—No. 1 Morse taper. Wt. 5 oz. \$1.29
9 KT 2111—No. 2 Morse taper. Wt. 8 oz. 1.39

9 Work Arbors. 4 1/2 in. long, 3 1/4-in. spindle has 1/2-in. x 20-thread. Steel flanges. Wt. 15 oz.
9 KT 21641—1/4-inch bore... \$1.69
9 KT 21642—1/2-inch bore... 1.69

10-11 Lathe Centers. For former 99-2162 or 5/8-in. unthreaded arbor. Shipping weight 8 oz.
(10) 9 KT 2102—Tailstock Cup... \$1.39
(11) 9 KT 2105—Headstock Spur... 1.39

12 8-in. Sanding Plates. Cast iron with sandpaper. For 3/4 x 16-inch right-hand thread arbor.
9 KT 2491—Shpg. wt. 4 lbs. 2 oz. \$6.99

13 Former 99-2162, any 5/8-in. unthreaded arbor.
9 KT 2341—Shpg. wt. 4 lbs. 2 oz. \$5.99

14 Face Plates. For 1/2-inch x 16 right-hand thread arbor. Choose diameter you need.
4-inch diameter. For inboard turning.
9 KT 2489—Shpg. wt. 1 lb. 12 oz. \$2.99
8-inch diameter. For inboard turning.
9 KT 2490—Shpg. wt. 4 lbs. 3 oz. 6.49

15 Face Plate. For former lathe 99-2162, any 5/8-in. unthreaded arbor. 4-in. diam. Set screw.
9 KT 2320—Shipping weight 1 lb. 15 oz. \$3.49

16 Face Plate. 3-in. diameter. Cast iron. Has spurs, removable center, screw center. Fits 3/4-inch x 16-thread spindle.
9 KT 2091—Shipping weight 1 lb. 9 oz. \$3.59

17 4-pc. Carbide-tipped Wood-turning Set. Stay sharp 20 times longer than ordinary steel. 10-inch handles. For wood, plastic, aluminum, brass. 1/8-inch parting tool, 3/8-inch gouge, one each 3/8-inch round-nose and 5/8-inch skew chisel.
9 KT 3629—Shpg. wt. 2 lbs. 6 oz. Set \$15.99

Wood-turning Tools. (18) through (25). Polished 4 1/4-inch carbon steel blades, ground to hold edge. 10-inch handles, heavy ferrules.

Shipping weight 13 ounces.
(18) 9 KT 2863—1-inch skew chisel... \$2.19
(19) 9 KT 2862—1/2-inch skew chisel... 1.59
(20) 9 KT 2856—1/2-inch round nose... 1.79
(21) 9 KT 2858—1/2-inch parting tool... 1.89
(22) 9 KT 2854—1/2-inch spear point... 1.79
(23) 9 KT 2852—1/2-inch gouge... 2.19
(24) 9 KT 2851—1/2-inch gouge... 1.99
(25) 9 KT 2850—1/2-inch gouge... 1.79

5-piece Set. 1/2-inch gouge, 3/8-inch parting tool, one each 1/2-inch spear point, 1/2-inch round nose and 1/2-inch skew chisel.
9 KT 2855—Shpg. wt. 2 lbs. 4 oz. Set \$7.99

Shpg. Note: "F" items (as F9 KT 2339N) COPEN ARDLEA from factory near Kansas City, Mo. **Sears** 15

CRAFTSMAN
REG. U.S. PAT. OFF.

Belt and Disc Sander

Gives you over 100-sq. in. of sanding surface! Use belt sander for large, flat surfaces or for curved, irregular work... disc sander for small jobs

Without motor,
guard or stand

\$72⁹⁹

Three big features—(1) Cam device for quick belt tensioning; (2) Two pre-lubricated sealed ball bearings on drive and idler shafts; (3) Drive roller and V-pulley keyed to drive shaft to prevent slipping.

Belt table can be pivoted from horizontal to vertical. Work table tilts 0° to 45°. Fence adjusts 90° to 45°. Heavy cast iron frame. Pulleys, V-belt incl.

(For extra accuracy, order miter gauge 9 KT 29929 shown on page 6).

Without motor, guard or stand.

99 KT 2254L—Shipping weight 65 pounds, \$5 monthly..... Cash \$72.99

With ½-HP, 3450-RPM sleeve-bearing capacitor-type motor. 110-120-volt, 60-cycle AC. With 4-foot cord.

99 KT 22542L2—Shipping weight 84 pounds, \$5 monthly..... Cash \$94.99

CRAFTSMAN Pedestal Stand, 35 inches high, 2½-in. diameter steel post. Cast iron base. With 4 holes for casters. Bracket, motor-mount and bolts included.

99 KT 2204L—Shipping weight 49 pounds..... \$29.99

9 KT 2819—Ball-bearing casters. Package of 4. Wt. 1 lb. 7 oz..... Pkg. 5.99

9 KT 2251—Steel Belt-Guard. Use with stand above. Wt. 3 lbs. 2 oz..... 7.29

SPECIFICATIONS

- Width of belt... 6 inches
- Length of belt... 48 inches
- Sanding belt table... 6½x17¾ inches
- Sanding disc table... 6½x12 inches
- Diam. sanding disc... 9 in.
- Bearings... 2 sets, sealed ball
- Drum diameter... 3 inches
- Machine pulley... 2½ in.
- Motor pulley... 2 inches
- V-belt... ½x40 inches
- Motor recommended... ½ HP, 3450 RPM
- Over-all size... 10½x18x28½ in.
- Mounting dimensions (center to center of bolt holes)..... 10½ inches

Alloy-steel Shaper Cutters

Precision machined for professional quality work. All cutters 1 inch high with ½-inch bore, except (8) 9KT3288 which is ¾ inch high and (10) 9KT3287 which is ¾ inch high. For use with drill press, use with 9KT2483 adapter described on page 18.

Shaper Cutter Type	Catalog Number	Wt. oz.	Price
2-inch diameter Shaper Cutters			
(1) ¼ and ½-in. radius Ease Edge or ¼-in. Glass Bead.....	9 KT 3295	6	\$2.99
(2) ½-in. Tongue and Groove Matched Set.....	9 KT 3283	10	5.99
(3) ½-inch Radius Base Shoe Molding or ½-in. Quarter Round.....	9 KT 3285	6	2.99
(4) 3-bead ¼-in. Molding.....	9 KT 3293	6	2.99
(5) 1-inch Jointer.....	9 KT 3289	7	2.99
(6) Lip Capboard Door or ¼-inch Quarter Round.....	9 KT 3294	6	2.99
(7) Drop Leaf Bead.....	9 KT 3291	6	2.99
(8) ½-inch Groove.....	9 KT 3288	5	2.79
(9) Reversible Glue Joint.....	9 KT 3284	6	2.99
(10) ¼-inch Groove.....	9 KT 3287	4	2.79
(11) Taper Edge.....	9 KT 3292	6	2.99
(12) Drop Leaf Cove.....	9 KT 3290	6	2.99
(13) ½-inch Ease Edge or Screen Mold.....	9 KT 3286	6	2.99
(14) 2½-in. diameter ¼-in. Quarter Round.....	9 KT 3281	6	3.99
(15) 2½-in. diameter ¼-in. Open Molding.....	9 KT 3282	6	3.99

Without motor
or stand

\$89⁹⁹

SPECIFICATIONS

- Cutter height capacity... 2½ in.
- Cutter bore... ½ in.
- Bearings... 2 sets, sealed ball
- Table height (stationary)... 18½ in. above base
- Miter gauge slot... ¾x¾ inch
- Length of fence... 18½ to 21 in.
- Spindle diameter... ½-inch ends; ¾-inch center
- Spindle adjustment... ¾ in.
- Spindle thread... ½x16-inch Acme
- Spindle speed recommended... 9000 RPM
- Machine pulley... 2 inches
- Motor pulley... 4½ inches flat (incl.)
- V-belt... ½x33 in.
- Minimum motor... ½ HP, 3450 RPM
- Mounting dimensions... 3 holes: 2 rear are 11½ in., front 9½ in.
- Height 11¼ in.; width 27 in.; depth less motor guard 19 inches

Sash and Door Cutting Kit

\$4⁴⁹

For use with 99KT2394N at right or former shaper 99-2392.

Kit includes: 5 spacer collars (¼, ¾, 1½, 2, 1 in. wide) with ½-in. bore and sash cutter blade. Hex key. 3 recessed nuts (¼x24, ¾x20, ½x16 Acme thread).

On drill press, use kit with adapter 9KT2483, on page 18. Wt. 8 oz. 9 KT 2407... Kit \$4.49



5-pc. Shaper Collar Set. Use above or below cutter to provide bearing surface for portion of workpiece edge which is not to be shaped. Easily do free-hand edge shaping of curved workpieces. Fit ½-in. spindle. Wt. 7 oz. 9 KT 2367... Set \$2.89

CRAFTSMAN High-speed Wood Shaper

REG. U.S. PAT. OFF.

FEATURES: (1) Extra-big 27x19-inch polished, ground semi-steel table; (2) Fence adjusts either side in or out without loosening; (3) Control for spindle height adjustment easy to reach in all positions. Legs etc. won't interfere; (4) Floating upper bearings for greater accuracy, 2 sets of permanently lubricated sealed radial bearings; (5) Critical parts machined for reliability at high speeds; (6) Built-in guard encloses belt, motor pulley for safety; (7) Collars, nuts, washers hardened to prevent burring; (8) Greater spindle diameter between bearings prevents whip, vibration. Spring hold-downs. Solid-type spindle turns either direction. 3 spindle collars.

Without motor or stand.

99 KT 2394N—Shipping weight 87 pounds..... \$89.99

With CRAFTSMAN ½-HP, 3450-RPM capacitor motor.

99 KT 23942N2—110-120-v., 60-c. AC. Shpg. wt. 106 lbs..... 109.95

Pedestal Stand for above, 33½ inches high, 2½-inch diameter steel column. Cast iron base. 4 holes for casters in base. Order casters below.

99 KT 2225L—Shipping weight 41 pounds..... \$29.99

9 KT 2819—Ball-bearing Casters, Pkg. of 4. Wt. 1 lb. 7 oz..... Pkg. 5.99



CRAFTSMAN
REG. U.S. PAT. OFF.
Dust Collector
New Attachment for
radial-arm saws

\$49⁹⁹
Complete

Powerful suction collects sawdust through 9 $\frac{3}{4}$ x 10-in. shroud opening and 4-in. duct in rear... also from blade guard through 1 $\frac{1}{4}$ -in. hose. Effective in all crosscut and up to 45° miter cut positions. Develops 1.1 HP. Can be used as a regular Home-n-Shop vac with reducer and angle coupling included. (Order hose 9 KT 16963 and any hose attachments below.) Shroud easily attaches to table; drum hangs from saw stands on page 3. 17 $\frac{1}{2}$ -gal. drum holds 2 bushels of dust. Includes duct and hose, each 42 inches long; shroud, base plate, reducer, angle coupling mounting hardware, 5-paper filter-bags and instructions. On-off slide switch, 6-ft. cord, 110-120-v., 50-60-cycle AC. UL listed. 1-yr. guarantee, below.

99 KT 16995C—Shipping weight 19 lbs. \$5 monthly... \$49.99

*No Money Down on
anything Sears sells*

SEE PAGE 90

CRAFTSMAN
REG. U.S. PAT. OFF.
**Home-n-Shop
Vac**

For cleaning shop areas, garages, many places where ordinary cleaners clog. Picks up dust, wood chips, metal shavings. Can also be used as blower.



Cleans up big areas fast, indoors or out



Handy for cleaning car interior and truck

\$42⁹⁹ without dolly

27-gallon drum holds up to 3 $\frac{3}{4}$ bushels of dust

This heavy-duty cleaner eliminates the messy job of sweeping with clouds of dust swirling about when cleaning shop, garage, basement, etc. Takes care of all the dirty work—and saves your household cleaner for less demanding jobs. Picks up small nails and packaging material... also hair clippings in barber shops and beauty shops. Excellent for cleaning furnaces, fireplaces and barbecue pits.

Works faster and cleans more thoroughly than smaller-capacity, lower-powered units. 19-in. diameter; 27 in. high. Universal motor develops 1.1 HP. Hose swivels a full 360°. Connect hose to drum exhaust for blowing dirt from corners or tight spots. Also convenient for air drying or circulating. Triangular-shaped nozzle gets into corners.

Dirt, chips, dust, etc., by-pass motor and empty directly into drum. Includes fiber drum, motor, 6-foot flexible hose, triangular pick-up nozzle, and 6-ft. cord. See one-year guarantee below. For 110-120-volt, 60-cycle AC. UL listed. Dolly not included (see bottom of page for dolly and other accessories).

Sent freight (rail or truck) or express.

99 KT 1696N—Shipping weight 26 pounds. \$5 monthly... Cash \$42.99

CRAFTSMAN Compact Vac

Holds 1 $\frac{1}{2}$ bushels of dust and dirt, yet the cost is low **\$29⁹⁹** without dolly

Motor develops 1 HP. Ideal for studios, attics, barber shops. 12-gallon fiber drum, 16-in. diameter, 15 in. high. Single stage motor. 6-ft. hose swivels 360°. Nozzle, 6-ft. cord, 110-120-volt, 60 cycle AC. UL listed. Guaranteed 90 days. No dolly. Shpg. wt. 15 lbs.

99 KT 1698L—\$4 monthly... Cash \$29.99

4-wheel Dolly for above vac. Steel frame, plastic casters.

9 KT 16985—Wt. 3 lbs. 10 oz. \$2.99



CRAFTSMAN Industrial Vac

With 2 motors, built-in dolly
Holds 6 $\frac{1}{2}$ bushels of dirt

\$79⁹⁹

Develops 50% more suction than any of our other vacuums. Designed for continuous-duty use. Two motors, each develops 1.1 HP. Sealed ball bearings are permanently lubricated.

Big 55-gallon drum capacity. Picks up everything from dust to stones. Perfect for garages, schools... any place with a cleaning problem.

Steel drum is rib-reinforced... built for industrial use. Built-in dolly has 4-inch casters, sturdy steel brackets.

Convenient handles make emptying simple. Painted black inside and outside for rust resistance. Heavy-duty hose switches to exhaust outlet for blowing dirt away from hard-to-reach spots, and for air drying.

See one-year guarantee listed directly below.

Hose swivels a full 360°. Triangular nozzle, 6-foot hose, angle coupling, adapter, 110-120-volt, 25-60 cycle AC-DC. UL listed. Sent by freight (rail or truck) or express. \$5 monthly.

99 KT 1697N—Wt. 70 lbs. Cash \$79.99



Vac Accessories

1 4-wheel Dolly. With strong steel frame, sturdy plastic casters. For Home-n-Shop Vac 99 KT 1696N above and former 99-1692.

9 KT 16908—Wt. 3 lbs. 10 oz. \$3.99

2 Accessory Set. Plastic. Includes 1 brush, 1 blower, and 1 crevice tool.

9 KT 16973—Wt. 1 lb. 11 oz. Set \$3.99

3 14-inch Nozzle. Plastic. Fits hose and extension handle.

9 KT 16925—Wt. 1 lb. 14 oz. \$3.99

4 Hose Adapter. Takes most household vacuum attachments.

9 KT 16966—Shpg. wt. 6 oz. \$1.49

Extra 6-ft. Hose and Connector Set.

9 KT 16963—Wt. 3 lbs. 4 oz. Set \$4.99

5 2-piece, 46-in. Extension Handle.

9 KT 16964—Wt. 1 lb. 9 oz. \$3.99

Cloth Motor Protector Bag.

9 KT 16967—Shpg. wt. 4 oz. \$9.99

Paper Bag. Use over cloth bag. Package of 5.

9 KT 16946—Shpg. wt. 5 oz. Pkg. 99c

GUARANTEE: If any vac on this page shows defects in materials or workmanship, we will repair it without charge, if returned within the guarantee period. (Vacs 99 KT 1696N and 99 KT 1697N guaranteed 90 days when used in continuous service).



New CRAFTSMAN[®] REG. U.S. PAT. OFF. 15 1/2-inch Drill Presses

Industrial quality... boasts a full 6-inch spindle travel... and a switch that operates both the built-in work light and your motor. This versatile switch is conveniently located to free your right hand for operating feed lever

Floor model without motor

Bench model without motor

\$144⁹⁵

\$134⁹⁵

Designed and built for use in industrial and school machine shops and for professionally-minded home craftsmen. Does much more than just drill—with accessories on opposite page you can rout, shape, carve, dovetail, mortise and plane. Performing all of these operations is far more convenient because a special "Safe-Lock" chuck has a threaded collar which locks on spindle... lets you use routers and cutters without a collet chuck.

Full-length belt guard adds extra protection. Large, fully-machined cast-iron 10x12 1/2-in. table gives more space for handling bulky workpieces. And it's slotted to hold fixtures... allows use of C-clamps to hold work. Adjustable table and head held rigidly in position by conveniently located column clamps. Comes with column collar (9 KT 2438) sold at right below... holds head or table for rotating. Strong coil spring for sure, quick quill return. No. 33 Jacobs taper on spindle holds 0 to 1/2-in. capacity, 3-jaw chuck. Depth gauge calibrated in 16ths in. Two sets of permanently lubricated ball bearings.

Floor Model without motor. 65 1/2 in. high; 48 1/2 in. from base to chuck. Max. table travel 42 3/4 in. Shipping weight 155 lbs.

99KT2454N—\$7.50 mo. Cash \$144.95

Floor Model with motor. 1/2-HP, 1725-RPM capacitor motor. 110-120-volt, 60-cycle AC. 4-ft. cord. Shipping weight 176 lbs.

99 KT 24561N2—\$8 mo. Cash \$164.95

Bench Model without motor. 35 1/2 in. high; 22 in. from base to chuck. Max. table travel 17 3/4 in. Shipping weight 120 lbs.

99KT2454N—\$7 mo. Cash \$134.95

Bench Model with motor. 1/2-HP, 1725-RPM capacitor motor. 110-120-volt, 60-cycle AC. 4-ft. cord. Shipping weight 141 lbs.

99KT24541N2—\$7.50 mo. Cash \$154.95

SPECIFICATIONS

Detail	Floor Model	Bench Model
• 9 speeds	660 to 5000 RPM	
• Depth of throat	7 1/4 inches	
• Spindle	No. 33 Jacobs Taper	
• Bearings	2 sets precision ball	
• Chuck capacity	0 to 1/2 inch	
• Spindle travel	6 inches	
• Quill diameter	1 1/4 inches	
• Depth graduations	1/16 inch	
• Work surface	10x12 1/2 inches	
• Machine pulley (incl.)	5-inch, 4 step	
• Motor pulley (incl.)	5-in. 4-step; 3/4-in. bore (keyed)	
• V-belt (included)	1/2 inch x 45 inches	
• Table travel	42 3/4 inches	17 3/4 inches
• Distance, base to chuck, maximum	48 1/2 inches	22 inches
• Mounting dimensions	15 1/4 x 13 1/4 in.	9 1/2 x 14 1/4 in.
• Height	65 1/2 inches	35 1/2 inches
• Width	18 1/4 inches	12 1/4 inches
• Depth	24 inches	19 inches



1 Adapter with Holding Collar. Use with 1/2-inch bore shaper cutters shown on page 16. Fits drill presses at left: former 99-2450 and 99-2451.

Also fits other makes of drill presses which have No. 33 Jacobs taper spindle. Precision built.

Adapter has 1/2-inch x 20-thread. Collar screws to drill press spindle. 9 KT 2483—Shpg. wt. 11 oz. \$2.99

2 Collet Chuck with Holding Collar. Fits high-speed woodworking bits with 1/4 or 1/2-inch shank. 1/2-inch capacity with 1/2-inch bushings.

Fits all drill presses which have No. 33 Jacobs taper spindle. Fits both drill presses on this page; former 99-2450 and 99-2451. Screws to spindle.

9 KT 2467—Shpg. wt. 11 oz. \$2.49



Tilt Table, Column Collar

3 Tilt Table. Makes end and angle routing and drilling simpler... more precise. Rugged 8 1/2 x 11 1/4-in. cast-iron table with ground flat surface. Indexes at 45° and 90°, left or right.

Designed so that long work piece clears column when clamped to table at 90°. Can be used without knocking down set-up on normal table. Locking wrench and mounting hardware incl. 99 KT 2439K—Wt. 25 lbs. \$11.99

4 Column Collar. Holds head or table for rotating. Can be installed or removed without removing drill head from column. Included with drill presses on this page; fits others with 2 1/4-inch diameter columns. 9 KT 2438—Shpg. wt. 1 lb. \$1.99

Get the right speed for every job with CRAFTSMAN Speed Controls

REG. U.S. PAT. OFF.



Vari-speed
Control

\$39⁹⁹

Change speeds from 300 to 3750 RPM in seconds without stopping spindle. 12:1 ratio with hand lever without changing belt position. Fits former 99-2450 and 99-2451 drill presses only.

Tough aluminum alloy and Tenzaloy. Pulleys turn on ball bearings. Simple to install... no holes to drill. Three V-belts and easy-to-follow instructions included.

Shipping weight 5 pounds 4 ounces. 9 KT 2340—\$39.99



Multi-speed
Attachment

\$19⁹⁹

Slow spindle down to 230 RPM... speed it up to 8000 RPM. Use high speeds for routing, dovetailing, etc. Slow speeds for drilling large diameter holes in steel. Fits drill presses on this page; former 99-2450 and 99-2451; other drill presses with 2 or 2 1/4-inch diameter columns. Includes 2 V-belts.

Shipping weight 4 pounds 11 ounces. 9 KT 2338—\$19.99




Variable-speed
1/2-HP Motor

\$79⁹⁹

Dial ANY speed between 500 and 5000 RPM under full load. Silicon-controlled rectifier means full torque at ALL speeds. Mounts in any position. Single-phase universal type. 110-120-v, 60-c. AC. Manually reset overload protector. Keyed, single-end, 1/2-in. diam. shaft. Mounting 3x4 1/4 in. NEMA 56 frame. 4-ft. cord. 1-yr. guarantee (see page 37). 99 KT 2344K—Shpg. wt. 21 lbs. \$5 mo. Cash \$79.99

No Money Down on anything[®] Sears sells

SEE PAGE 96

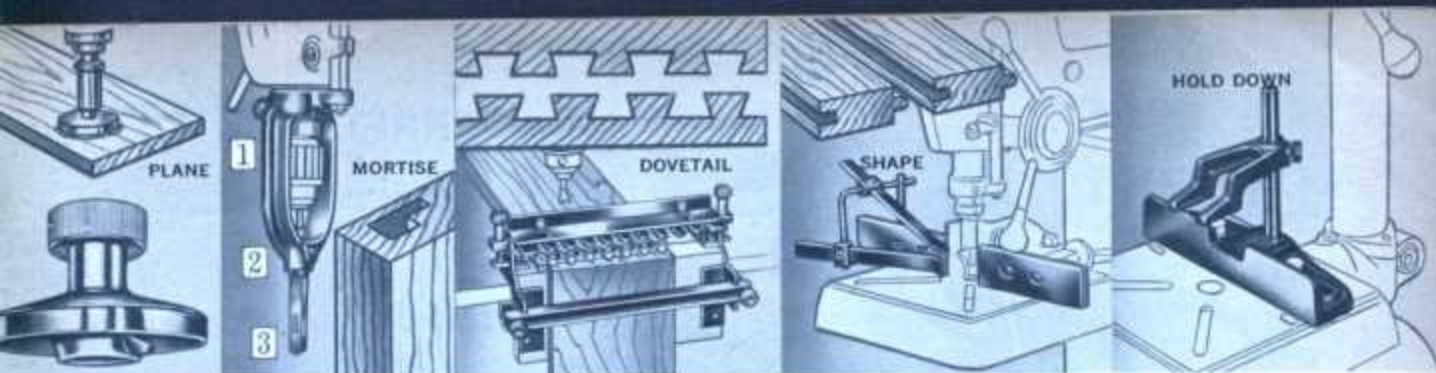

See what your Drill Press can do with Sears Accessories

CRAFTSMAN Rotary Planer. Converts drill press to planer.

Dresses, trues up, finishes wood surfaces. Also use to remove paint and varnish.

Fits CRAFTSMAN drill presses shown on page 18, others with No. 33 Jacobs taper. 1 1/2-inch x 20-thread side-thrust nut or locking collar. 3/8-inch diameter.

With hex wrench, complete instructions.

Shipping wt. 1 lb.
9 KT 2745.....\$6.99

1 Mortising Chisel Housing holds hollow chisels below. Fits drill presses 99 KT 2456N, 99 KT 2454N on page 18; former 99-2450, 99-2451; most older presses. Mounts on quill. 9 KT 2464—Shpg. wt. 4 lbs.....\$5.99

2 Hollow Chisels. For former 9-2460, 9 KT 2464 described above. Shipping weight each 4 oz.

Catalog No.	Size	Cut depth	Each
9 KT 24201	1/4-inch	1 1/2-inch	\$3.59
9 KT 24202	3/8-inch	3-inch	3.79
9 KT 24203	1/2-inch	3-inch	3.99

3 Mortising Bits. For above. Shipping weight each 4 ounces.

9 KT 24221—1/4-inch size.....	\$2.49
9 KT 24222—3/8-inch size.....	2.69
9 KT 24223—1/2-inch size.....	2.89

Dovetailing Attachment. Makes accurate dovetail joints. Clamp holds work pieces at 90° angle; cuts both pieces at same time.

Hardened-steel slotted comb controls spacing, depth of cut.

End plates, comb, screw fittings, clamps, wood parts included. Use with 1/2-in. dovetailing bits only (not included).

Instructions show how to make dovetail joints just like those most commonly used in manufacturing fine furniture.

Duplicate joints used in making bookcases, drawers, chests, other pieces.

Shipping weight 5 lbs. 10 oz.
9 KT 2462.....\$12.49

CRAFTSMAN Shaper Fence Attachment. Converts drill press into shaper. Forms support for making picture frames, sashes, moldings, trimmings. For drill presses on page 18.

Hardwood fences open 1 to 3 inches. Each adjusts separately. Micrometer-type adjustments with 1 1/2-inch maximum forward and back travel.

Hold-downs keep pressure on work. Shift to either end of the unit for regular and reverse feeds.

Shpg. wt. 6 lbs. 2 oz.
9 KT 2487.....\$16.99

CRAFTSMAN Hold-down and Guide. Fits almost any drill press table. For mortising, routing, planing, repetitive drilling. Strong, cast-iron construction.

Fingers on hold-down prevent workpiece from lifting when chisel or drill is raised... keeps work lined up. Easily adjustable to thin and thick work materials.

Hold-down and guide bolt to table.

Bolts are not included. Shpg. wt. 6 lbs. 2 oz.
9 KT 2457.....\$7.49



Put these extra hands in your workshop... Work Holder, Vises, Rotary Table

(4 through 8) Drill Press Vises. Sturdy cast iron. Jaws are steel-faced... one face grooved... one plain.

4 General-purpose Vise. Precision steel adjusting screw holds machined cast iron jaws firmly for accurate use of your drill press... less errors... less wasted materials. 3-in. jaws open to a maximum of three in. built to hold curved or tapered pieces. 8 in. long. Mounting lugs included.
9 KT 2757—Shpg. wt. 7 lbs. 15 oz.....\$12.99

5 Heavy-duty Precision-squared Vise. The largest, strongest drill press vise we offer... built to take continuous shop use. Multi-purpose. Can be used on end, either side or in normal position. Heavy steel adjusting screw. Big 4-inch jaws open to 4 in. 10 1/2 in. long.
99 KT 2758C—Shpg. wt. 19 lbs.....\$22.99

6 Drill Press Work Holder. Zinc alloy base; 10 1/2 in. long; 2 1/2 in. steel-faced jaws open 3 inches at the maximum. Extra cast iron jaws; 1 for irregular work, 1 for tapered work.
9 KT 2436—Shpg. wt. 4 lbs. 6 oz.....\$7.49

7 CRAFTSMAN Precision-squared Vise. Use on end, either side or in normal position. 2 1/2 in. jaws open maximum of 2 1/2 in. Steel adjusting screw, fine-pitch thread. 7 1/2 in. long.
9 KT 2753—Shpg. wt. 4 lbs. 12 oz.....\$9.99

8 CRAFTSMAN Angle Vise. Fast, accurate, without clamps, wedges. Adjust 0° to 90° or use horizontally. Use with magnetic chuck, too. 2 1/2 in. jaws open max. 2 1/2 in. 9 in. long.
9 KT 2754—Shpg. wt. 8 lbs. 4 oz.....\$11.99

9 Drill Press Milling Vise. Bolts to drill press table. Also adapts to shapers, lathes, milling machines, grinders. Work is locked on 7x7-in. table between adjustable jaws. Maximum opening 4 1/2 inches.

One jaw swivels, other has movable face. 6 1/2 in. cross feed travel (lower)... 5 1/2 in. traverse feed travel (upper). Upper slide graduated 90° right or left.

Comes complete with wrench and bolts... ready for mounting on drill table.
Shpg. wt. 35 lbs.
99 KT 2432K... \$57.99

10 CRAFTSMAN Rotary Table with cross slide. A valuable machine shop accessory. Use for layout and indexing... as rotary milling table. Adapted for drill presses, milling machines, surface grinders and shapers. 8x5-inch table rotates a full 360°... forty-to-one worm gear ratio. Rotary dial calibrated in 15-minute intervals. Dual cross feed of 2 1/2 inches on each side, or 4 1/2 inches over-all. Dials in 1000ths. Removable jaw is set 2 1/2 inches wide. 5 inches high. Shipping weight 37 lbs.
99 KT 2496K.....\$87.99



11 1-pc. Kromedge® Router Bits. 3/4-in. diam. shank fits any router, drill press or radial arm saw. High speed alloy steel or carbide tipped.

Straight-flute Router Bits. Shipping weight each 3 oz.
9 KT 2552—1/4-in.....\$1.49 9 KT 25521—1/4-in.....\$1.49
9 KT 25522—3/8-in.....1.99 9 KT 25523—1/2-in.....2.59

Carbide tip, straight-flute Bits. Single flute. Shipping weight each 4 ounces.

9 KT 25524—1/4-in.....\$3.99 9 KT 25525—3/8-in.....4.49
9 KT 25526—1/2-in.....4.99 9 KT 25527—3/4-in.....5.99

1 1/2-inch Strain thread end river Bit.
9 KT 2518—Shipping weight 3 ounces.....3.49

V-fluting Bits. Shipping weight each 2 ounces.
9 KT 2559—1/4-in.....\$1.69 9 KT 25592—3/8-in.....1.89
9 KT 25593—1/2-in.....1.99

12 Dovetail Cutter Bits. Shipping weight each 3 oz.
9 KT 2553—1/4-in.....\$2.99 9 KT 25531—3/8-in.....\$3.99

13 V-groove or Chamfering Bit. 1/2-in.
9 KT 2557—Shipping weight 3 ounces.....3.79

14 Bead and Cove Bits. Use with arbor 9 KT 2589 (15) below.
9 KT 25561—1/2-inch Bead Bit, Shpg. wt. 3 oz.....\$3.79
9 KT 25562—3/4-inch Bead Bit, Shpg. wt. 3 oz.....3.49
9 KT 25571—1/2-inch Cove Bit, Shpg. wt. 3 oz.....3.79
9 KT 25572—3/4-inch Cove Bit, Shpg. wt. 3 oz.....3.49

15 Arbor for cove and bead bits (14) above. 2 pilots. 1/4-in. x 28-thread. For 1/2, 3/4-in. bead; 3/4-inch, 1 1/2-inch cove bits.
9 KT 2589—Shipping weight 3 ounces.....Set \$1.99

CRAFTSMAN Heavy-duty Circle Cutter. 3/4-in. shank. Cuts holes 2 to 8 inches in diameter in sheet steel, brass, wood, plastic. Removable high-speed steel bit. Setscrew wrench included with order.
Shipping wt. 14 oz.
9 KT 3640.....\$4.99

CRAFTSMAN Circle Cutter. Combination square and 3/4-inch round shank. Cuts holes 3/4-inch to 4 inches in diameter in brass, wood or plastic. High-speed steel cutting bit. Wrench incl.
Shipping weight 7 oz.
9 KT 3645.....\$1.99

Without Motor

\$239⁹⁵**CRAFTSMAN**

REG. U. S. PAT. OFF.

Metal-turning Lathe

6-inch swing . . 16 speeds . . 4 feeds
Accuracy tested to 1/1000 of an inch

SPECIFICATIONS

- Swing over bed 6 inches
- Distance between centers . . . 18 inches
- Spindle: Nose 1 inch x 10-thread
Taper No. 2 Morse
Bore $\frac{1}{2}$ inch
- Spindle bearings: Timken tapered roller
- Thread range 8 to 96 per inch, right or left hand, Metric threads .5 to 3mm
- Bed 1-piece cast semi-steel
- Carriage, hand wheel for hand operation; feed lever for reversible automatic longitudinal power feed
- Feeds0024, .0039, .0048 and .0078
- Back gear ratio about 6½ to 1
- Countershaft, back gear bearings 4 porous bronze
- Swing over carriage 3½ inches
- Compound rest travel 1½ inches
- Cross slide travel 4½ inches
- Tailstock taper No. 1 Morse
- Tailstock ram travel 1½ inches
- Tailstock setover $\frac{1}{4}$ inch
- Motor needed, min. ½-HP, 1725 RPM
- Machine pulley (included) 4 step
- Motor pulley (included) 2 step
- Mounting dimensions 43½ x 27½ x 4 in.
- Over-all dimensions 16½ x 24 x 33½ in.

Timken tapered roller bearings in headstock for long life

It actually matches our larger lathes in accuracy. True professional quality in every detail. Designed for precision work . . . for toolmakers, model-makers and hobbyists who demand top-quality tools. Compare features and specifications at left with other metal-turning lathes in this price range.

Cast semi-steel bed with precision-ground ways. 16 spindle speeds from 54 to 3225 RPM. Eight back-gear speeds. Graduated compound rest swivels 360°. Countershaft bench-mounted to reduce vibration; adjustable for speed changes.

Entire outfit includes 258-page Lathe Manual as described on the opposite page, and all the accessories illustrated above.

Accessory group includes the following items: 2-step motor pulley, 4-step machine pulley, 4-step quick-change countershaft, two 60-degree centers, ¼-inch tool bit, 9 threading gears, 1-inch lathe dog, ½-inch V-belt, two hex wrenches, 5¼-inch face plate and two standard-dimension wrenches, 1 combination and 1 open end.

Motor not included. Use your present motor (if at least ½ HP, 1725-RPM) or order separately from pages 36 and 37.

Lathe designed to be used with Mica Undercutter (F9 KT 1518) listed below. Also see pages 22 and 23 for additional accessories.

99 KT 2140N—Shipping weight 100 lbs. . \$239.95



Low as
\$74⁹⁹


CRAFTSMAN Lathe Table

For 12-inch lathes. Gray, heavy cast iron, crossbraced legs. Can be anchored to floor.

Pre-finished hardwood table top resists oils and coolants. Over-all height 33½ inches. Shipped by freight (rail or truck) or express. (See Shpg. Note below, right.)

For lathes 45 inches long.
F9 KT 1596N—Wt. 170 lbs. \$74.99

For lathes 57 inches long.
F9 KT 1597N—Wt. 180 lbs. 84.99

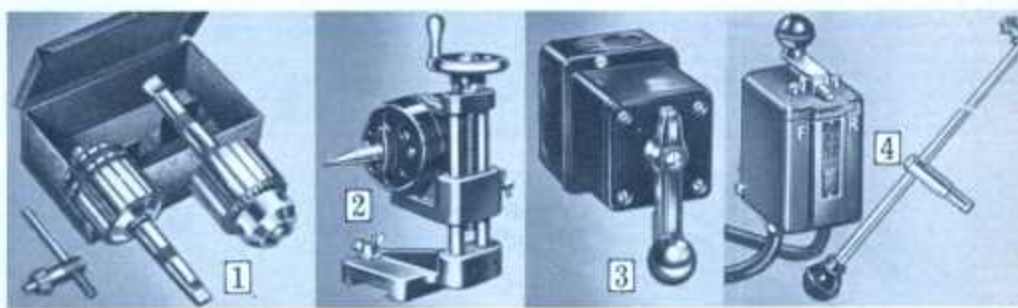**Accessories for 6 and 12-inch Metal-turning Lathes**

1 Commutator Kit. Holds armature shafts for reconditioning. No. 75A armature driving chuck; No. 100 center rest chuck (¼ to ½ in. cap.); 2 arbors (No. 2 Morse, No. 3 Jacobs taper); key.

For 12-inch lathe.
Shpg. wt. 7 lbs. 4 oz.
9 KT 2129 Kit \$35.99

For 6-inch lathe. As above except arbors are No. 1 and No. 2 Morse taper.
Shpg. wt. 6 lbs. 3 oz.
9 KT 2122 Kit \$35.99

2 Mica Undercutter. Screw feed regulates height of cutter. Carriage feed moves cutter into commutator slot. New grooves are always clean, square, parallel and uniform in depth. For 110-120-volt, 50-60-cycle AC-DC. With universal motor, switch, cord and 5 undercutting saws: .015, .020, .025, .030 and .035 inch.

For 12-inch lathe.
F9 KT 2989—Shipping wt. 10 lbs. . \$59.99

For 99 KT 2140N, 99-2128 6-inch lathes.
F9 KT 1518—Shipping wt. 9 lbs. . \$59.99

Set of 10 Replacement Blades. 2 each: .015, .020, .025, .030, .035 inch thick. *Postpaid.*
F9 KT 1519—(Shpg. wt. 2 oz.) . . . Set \$3.99

3 Reversing Switch. For 6 and 12-in. lathes. Use to stop, reverse split-phase and capacitor motors up to 1 HP. For voltages up to 550 AC. Diagram.

9 KT 2982—Shpg. wt. 1 lb. 9 oz. \$8.99

4 Reversing Switch. For any CRAFTSMAN 12-inch Lathe. 1-HP capacity for voltages up to 550, both single and 3-phase circuits. Comes with cord and installation instructions.

F9 KT 2018—Shpg. wt. 5 lbs. . \$18.59

SHIPPING NOTE: All "F" numbers (as F9 KT 1596N) from Kalamazoo, Michigan factory.

Our finest CRAFTSMAN Metal-turning Lathe

REG. U.S. PAT. OFF.


12 $\frac{1}{4}$ -inch swing, 16 speeds, 54 feeds
Accuracy tested to 1/1000 of an inch

Without motor, 24-inch centers

\$680⁹⁵

SPECIFICATIONS

- Swing over bed... 12 $\frac{1}{4}$ inches
- Swing over carriage... 7 $\frac{3}{4}$ inches
- Collet capacity... $\frac{1}{2}$ inch
- Lead Screw... $\frac{1}{4}$ -inch diameter, 8 Acme threads per inch
- Spindle Nose... 1 $\frac{1}{2}$ x 3 thread
- Spindle Nose Taper... Bored No. 3 Morse with reducing sleeve to No. 2 Morse
- Hole through spindle... $\frac{3}{8}$ in.
- Back Gears... 12 pitch, $\frac{1}{4}$ -in. wide
- Back Gear shaft bearings... oil-impregnated; bronze
- Back Gear Ratio... about 6 to 1
- Spindle Gear... 16 pitch, 32 teeth, $\frac{1}{4}$ -inch wide
- Spindle bearings... 2 Timken tapered rollers
- Tailstock Ram... 1 $\frac{1}{2}$ -in. diam.
- Tailstock Ram travel... 2 $\frac{3}{4}$ in.
- Tailstock Ram graduations... 0 to 3 inches by $\frac{1}{16}$ inch
- Tailstock Setover, forward or back... $\frac{1}{4}$ inch
- Cross feed travel... 6 $\frac{3}{4}$ inches
- Cross feed screw... $\frac{1}{4}$ -inch diameter Acme threaded
- Compound rest travel... 2 $\frac{1}{4}$ in.
- Tool Post... $\frac{1}{2}$ x $\frac{3}{4}$ -inch slot to take $\frac{1}{2}$ -in. tool bits or holder for $\frac{1}{2}$ -in. tool bits
- Compound rest swivel, graduated 0° to 90° right and left
- Motor recommended (min.) $\frac{1}{2}$ HP 1725 RPM
- Motor pulley (incl.) 2-step, 4 $\frac{1}{2}$ in.
- Countershaft bearings... 2 ball; 2 bronze, oil-impregnated
- V-belt... A section $\frac{1}{4}$ -in. wide
- Drive pulley (incl.) dual, 3-in.

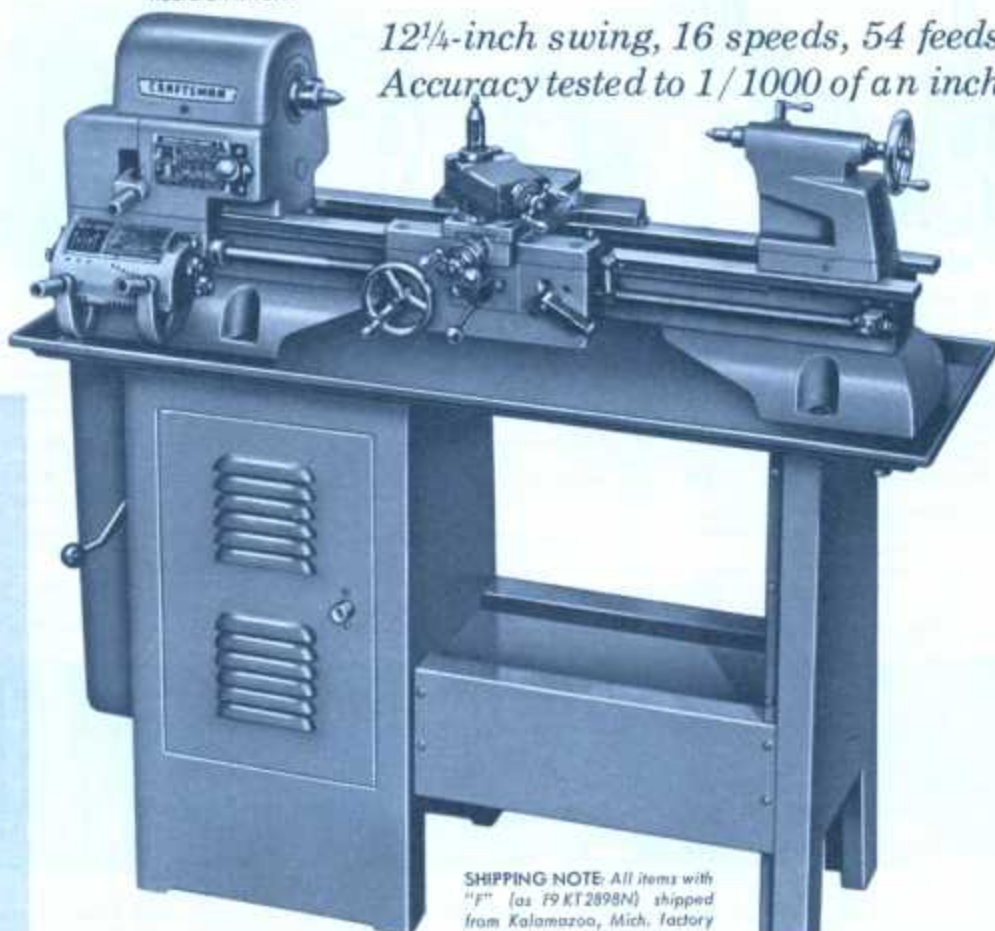

SHIPPING NOTE: All items with "F" (as F9 KT 2898N) shipped from Kalamazoo, Mich. factory

Quick-change gear attachment included. Heavy Timken roller bearings in headstock maintain spindle alignment... minimize friction. Leadscrew turns on roller thrust bearings. Lever-controlled feed-engagement for power cross-feed... engaging and disengaging faster and easier. One-spot apron lubrication system. Cross-feed and toolpost slide dials with lock screws for accurate setting. 60-hole index on headstock.

Cast semi-steel bed; precision-ground ways. 7 $\frac{3}{4}$ -in. swing over carriage. Spindle nose has $\frac{3}{8}$ x 3 in. bore. 1 $\frac{1}{2}$ -in. 8-thread spindle with No. 3 female Morse taper reduced to No. 2. $\frac{1}{4}$ -in. collet capacity. Back gears have approximately 6 to 1 ratio. 16 speeds from 28 to 2075 RPM. Tailstock has No. 2 Morse taper; $\frac{1}{4}$ -in. set-over for taper turning. 4-step machine pulley; 2-step motor pulley; V-belt; two 60° centers; tool post and wrenches, 258-page manual.

Use a minimum $\frac{1}{2}$ -HP, 1725-RPM motor (see pages 36 and 37). Motor not included.

With floor-model Cabinet. Underneath Drive. $\frac{1}{2}$ -in. plate; floor-type cabinet. Countershaft and belt-tension handles extend outside of the cabinet.

24-in. centers; 50 $\frac{1}{2}$ in. long. See Shpg. Note above.
F9 KT 2898N-Wt. 475 lbs. \$34 monthly. Cash \$680.95
36-inch centers; 62 $\frac{3}{4}$ in. long. See Shpg. Note above.
F9 KT 2899N-Wt. 505 lbs. \$35 monthly. Cash \$699.95

Without Cabinet. Countershaft mounted behind headstock, free of bed. Lever releases both belts at once.

24-in. centers; 45 in. long. See Shpg. Note above.
F9 KT 2890N-Wt. 335 lbs. \$26 monthly. Cash \$529.95
36-inch centers; 57 inches long.
99 KT 2891N-Wt. 348 lbs. \$28 monthly. Cash 560.95

Lathe Grinder \$149⁹⁵

Universal tool post grinder for 12-inch lathes. Ideal for grinding tools, dies, bushings, bearings, shafts, valves, valve-seats. Mounts on tool slide of lathe compound rest. Equips lathe for internal and external precision grinding. 2 speeds; grinds at 4900 RPM and 9100 RPM. With $\frac{1}{4}$ -HP, 3450-RPM motor; 110-120-volt, 60-cycle AC. Includes belt, 4-inch external and $\frac{1}{4}$ -inch internal grinding wheels (grind up to 4 $\frac{1}{4}$ -in. external diameters; from $\frac{1}{4}$ -in. to 9 $\frac{1}{4}$ -in. internal diameters). Heavy-duty spindle. With diamond wheel dresser and quill for internal work.

Shpg. wt. 37 lbs.
F9 KT 2998... \$149.95



Lathe Accessories for superior metal-working results

1 "Lathe Operation" Manual. 258 pages of photos, drawings, machinist's tables, easy directions. Paperbound with index tabs.
9 KT 2925—Shipping weight 1 lb. 4 oz. \$2.59

2 Quick-change Gear Attachment. Fits former CRAFTSMAN lathes, models 99-2758 and 99-2759. 54 threads or feeds between .0042 and .250-inch per revolution of spindle; all right or left-hand threads from 4 to 240 in these standards: National Coarse (UNF), National Fine (UNF), Acme, Square and Whitworth. No drilling or tapping needed to install. Replaces std. gear change assembly. With overload clutch... protects gear, gear box.
F9 KT 20145—Shipping weight 24 lbs. \$119.95

3 Taper Attachment. Cuts duplicate tapers on pieces of different lengths. Also use for internal boring and external work.

Index plate is graduated 7° and 3 inches both sides of center line; equals 2 $\frac{1}{4}$ -inch taper per foot right or left.

Use with any CRAFTSMAN 12-inch lathe. Travels 6 inches.

Shipping weight 11 pounds.
F9 KT 29845... \$49.99

No Money Down on anything Sears sells

SEE PAGE 96

Lathe Accessories

SHIPPING NOTE: All "F" items (as F9KT2987) shipped from factory in Kalamazoo, Michigan.



1 Milling Attachment. Graduated swivel vise, flat block, V-block. For face-milling, cutting keyways, etc.

For metal lathes 99KT2140N, 99-2128. Vise capacity 2 inches. Vertical feed 1 3/4 inches. Cross feed 3 3/4 inches.

9 KT 2057—Wt. 8 lbs. 6 oz. . . . \$42.99

For Craftsman 12-in. lathes. Vise capacity 2 5/8 inches. Vertical feed 3 3/4 in. Cross feed 5 inches.

9 KT 2987—Shpg. wt. 17 lbs. . . . \$49.99

2 Follower Rest. Mounts back of carriage dovetail slide. For accurate work on long, slender rods.

For metal lathes 99 KT 2140N, page 20.

9 KT 2042—Shpg. wt. 3 lbs. 2 oz. . . . \$8.99

For any Craftsman 12-in. lathe.

9 KT 2988—Shpg. wt. 3 lbs. 4 oz. . . . 9.99



3 Steady Rest. Clamps to bed ways. Has bronze jaws, hinged type. For diameters to 2 3/4 inches. For Craftsman 12-inch lathes.

9 KT 20506—Shpg. wt. 10 lbs. . . . \$16.99

As above, but not hinged type. For diameters to 2 3/4 inches. For metal lathes 99 KT 2140N, see page 20.

9 KT 2041—Shpg. wt. 3 lbs. 2 oz. . . . \$10.99

4 Lathe Dogs. Forged steel. For any face plate with slots. In four sizes.

9 KT 21831—3/4-in. Wt. 8 oz. . . . \$1.49

9 KT 21832—3/4-in. Wt. 10 oz. . . . 1.79

9 KT 21833—1-in. Wt. 12 oz. . . . 1.99

9 KT 21834—1 1/4-in. Wt. 14 oz. . . . 2.19

5 5 1/4-inch diameter. For lathes with 1-in. 10-thread spindle (99KT2140N; 99-2128). Has 4 slots.

9 KT 21405—Shpg. wt. 2 lbs. . . . \$6.99

6 8 3/8-inch diameter. For 12-inch lathes, lathes with 1 1/4-inch 8-thread spindle. Has 8 slots.

9 KT 24755—Shpg. wt. 7 lbs. . . . \$11.99

7 Boring Tool Holder. For 6-inch lathes. With clamp ring, V-block, plain block and 1/4-inch high-speed boring tool. Slots hold boring tools of 3/16, 1/8, 5/16, 3/8-inch diameter.


9 KT 1515—Shpg. wt. 1 lb. . . . \$6.29

Same as above but for 12-inch lathes. With clamp ring (has 1 1/4-inch outside diameter, 1 1/8-inch inside diameter); V-block and plain block; 1/4-inch boring tool.

Clamp ring has three slots to hold 3/16, 1/8, 5/16-inch diameter tools.

9 KT 1511—Shpg. wt. 1 lb. . . . \$6.99

See Shipping Note at top of this page

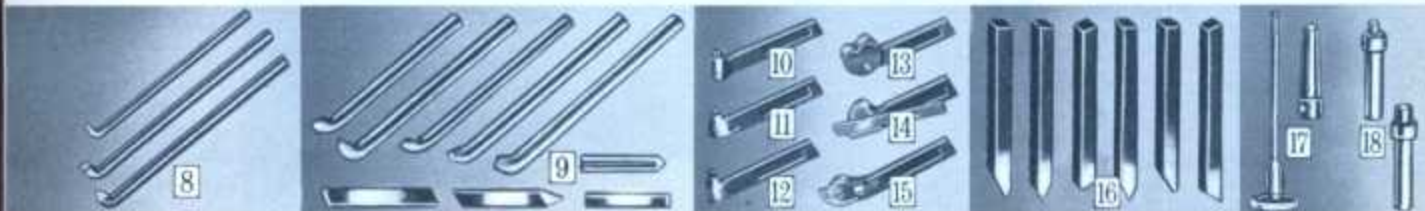

8 Boring Tool Set. 3/4, 5/16-inch boring; 1/4-inch threading tools; stiffening block. For lathes 99 KT 2140N, 99-2127 and 99-2128.

9 KT 2006—Wt. 4 oz. . . . Set \$5.99

9 Tool Post Sets. 4 boring bars; internal, external threading; external turning tools; spacer, V-block.

For 99 KT 2140N, 99-2128. Shipping weight 2 lbs. 2 oz.

9 KT 2038 Set \$13.99

For any Craftsman 12-inch lathe. Shpg. wt. 2 lbs. 2 oz.

9 KT 2189 Set \$14.99

Lathe Tool Holders. Forged steel, without bit.

Type	Cat. No.	Bit size	For lathes	Wt.	Each
10 Straight	9 KT 2033	3/16-in.	99 KT 2140N, 99-2128	8 oz.	\$3.19
11 Left hand	9 KT 2196	3/16-in.	Craftsman 12-in. lathes	10 oz.	3.79
12 Right hand	9 KT 2035	3/16-in.	99 KT 2140N, 99-2128	8 oz.	3.19
13 Left hand	9 KT 2194	1/8-in.	Craftsman 12-in. lathes	10 oz.	3.79
14 Right hand	9 KT 2034	1/8-in.	99 KT 2140N, 99-2128	8 oz.	3.19
15 Left hand	9 KT 2192	1/8-in.	Craftsman 12-in. lathes	10 oz.	3.79
16 Right hand	9 KT 2036	1/8-in.	99 KT 2140N, 99-2128	10 oz.	8.49
17 Flaring	9 KT 2202	1/8-in.	Craftsman 12-in. lathes	13 oz.	8.99
18 Flaring	9 KT 2037	1/8-in.	99 KT 2140N, 99-2128	10 oz.	4.49
19 Cutoff	9 KT 2200	1/8-in.	Craftsman 12-in. lathes	12 oz.	4.79
20 Threading	9 KT 2031	1/8-in.	99 KT 2140N, 99-2128	10 oz.	7.29
21 Threading	9 KT 2198	1/8-in.	Craftsman 12-in. lathes	12 oz.	7.99

Replacement Blades. For cutoff tools. See (14) above.

9 KT 2238—For 9 KT 2200. Shipping weight 4 oz. . . . \$2.29

9 KT 2009—For 9 KT 2037. Shipping weight 2 oz. . . . 2.19

16 6-piece Formed Tool Bit Sets. Threading bit; left-hand and right-hand facing bits; left-hand, right-hand, round-nose turning bits. High-speed steel.

9 KT 2043—3/16-inch size. Shipping wt. 5 oz. . . . Set \$2.99

9 KT 2205—1/4-inch size. Shipping wt. 5 oz. . . . Set 2.99

17 Milling Cutter Holder. 3/4-inch arbor included.

For lathes 99 KT 2140N only.

9 KT 21408—Shipping weight 2 pounds . . . \$10.99

9 KT 29945—For Craftsman 12-inch lathes. Wt. 3 lbs. 12.99

Four Bushings. Use with 3/4, 5/16, 3/8, 1/2-in. end mills.

None required for 1/4-inch end mill.

9 KT 2985—Shipping weight 8 ounces . . . Set \$3.69

18 Arbors for milling cutter holder (17) above. Needed to adapt angular cutters. Prepaid.

9 KT 1566—For 3/4-in.x24-thread cutter. (Wt. 3 oz.) . . . \$3.49

9 KT 1567—For 1/2-in.x20-thread cutter. (Wt. 3 oz.) . . . 3.49



19 Carriage Stop. Clamps to bed way of 6-inch or 12-inch lathes. Wt. 2 lbs.

9 KT 2185 \$8.99

20 Cross Slide Stop. Designed to show depth at which to stop cross feed.

Slide stop is not intended to stop the cross feed automatically. To install, simply clamp the cross slide stop to dovetail. Prepaid.

(Shipping weight 8 oz.)

9 KT 1510 \$5.99

21 Angle Plate. For 12-inch and 10-inch lathes. Simplifies off-center work and the machining of odd-shaped pieces. Bolt to face plate. Horizontal face is 6x4 1/2 x 5/8 inches. Vertical face is 6x2 1/4 x 5/8 inches.

9 KT 1509—Shipping wt. 10 lbs. . . . \$10.99

22 Clamp-type Dog. Handles square, round, rectangular and hexagonal work. Clamp bars are carefully machined and hardened—screws are heat treated.

For 12-inch and 6-inch lathes. Jaws open to 2 inches.

9 KT 1512—Shipping wt. 1 lb. . . . \$7.99

23 Angular Cutters. For face-milling, dovetailing and cutting angles less than 90°. Included angle is 60°.

Threaded hole adapted to fit milling holder (17) 9 KT 29945 or 21408 above right with arbors (18) 9 KT 1566 and 9 KT 1567 also above right. Prepaid.

3/16-inch thick. (1 1/4-inch diameter. 3/4-in.x24-thread hole.)

9 KT 29951—(Shpg. wt. 9 oz.) . . . \$11.99

1/2-inch thick. (1 1/4-inch diameter. 1/2-in.x20-thread hole.)

9 KT 29952—(Shpg. wt. 9 oz.) . . . \$13.99

24 Woodruff Keyway Cutters. 1/4-inch shank. Prepaid. (Shpg. wt. ea. 9 oz.)

Catalog No.	Diameter	Thickness	Each
9 KT 29961	3/8 in.	3/8 in.	\$5.19
9 KT 29962	1/2 in.	3/8 in.	5.49
9 KT 29963	3/4 in.	3/8 in.	6.99
9 KT 29964	1 1/4 in.	3/8 in.	8.19
9 KT 29965	1 1/2 in.	3/8 in.	9.29

25 R.H. Spiral End Mills. For slots. Held in milling holder 9 KT 29945 or 21408 with bushings 9 KT 2985, see (17). Prepaid. (Wt. each 9 oz.)

Catalog No.	Diameter	Length 3/4 in.	Each
9 KT 29971	3/8 in.	3/4 in.	\$3.99
9 KT 29972	1/2 in.	1 1/4 in.	4.29
9 KT 29973	3/4 in.	1 1/4 in.	4.59
9 KT 29974	1 in.	1 1/4 in.	4.79
9 KT 29975	1 1/4 in.	1 1/4 in.	5.29

Chucks and Arbors .. other Accessories



1 Geared Key Headstock Chucks. Key type. Key included.

Capacity 0 to 1 1/2 inch. Fits 1-in. 10-thread spindle. Do not use with arbor.

9 KT 2763—Shpg. wt. 2 lbs. 2 oz. \$18.99

Capacity 1/2 to 3/4 inch. Fits 1 1/2-in. 8-thread spindle. Do not use with arbor.

9 KT 2144—Shpg. wt. 3 lbs. 12 oz. \$24.99

Capacity 3/4 to 1 inch. Fits 1 1/2-in. 8-thread spindle. Do not use with arbor.

9 KT 2121—Shpg. wt. 5 lbs. 8 oz. \$29.99

2 Lock-type Chuck. For drill presses with 1 1/2-in. x 20-thread collar; No. 33 Jacobs taper. Swiveling threaded lock collar locks chuck on spindle. No special collet chucks or adapters for router, dovetailing, carving bits are needed. Capacity 0-1/2 inch. Key is included.

9 KT 2962—Shpg. wt. 1 lb. 11 oz. \$10.99

3 Center-rest Chuck. Cap. 1/2 to 3/4 inch. Supports centerless armatures. Must be used with No. 3 Jacobs taper arbors.

9 KT 2991—Shpg. wt. 3 lbs. 2 oz. \$17.99

4 Chuck Arbors. For chuck (5) at right. No. 1 Morse and No. 33 Jacobs taper.

9 KT 2123—Shpg. wt. 5 oz. \$1.99

No. 2 Morse and No. 33 Jacobs taper.

9 KT 2124—Shpg. wt. 8 oz. \$1.49


Chuck Arbors. For 9 KT 2991 (3) above. 9 KT 2129 on page 20.

No. 1 Morse and No. 3 Jacobs taper.

9 KT 2154—Shpg. wt. 8 oz. \$1.99

No. 2 Morse and No. 3 Jacobs taper.

9 KT 2126—Shpg. wt. 9 oz. 1.49

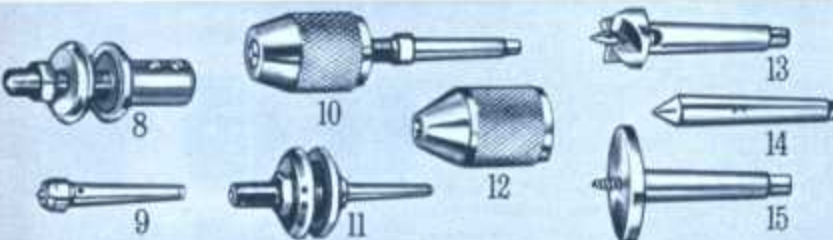

8 Work Arbor. Converts motor into grinder, polisher, etc. Get more use from your motor at little extra cost. 4 1/2-in. long. 3 1/2-in. spindle has 1/2-in. x 20-thread. Carbon steel. Steel flanges.

9 KT 21641—1/2-inch bore. Shpg. wt. 15 oz. \$1.69

9 KT 21642—1/2-inch bore. Shpg. wt. 15 oz. 1.69

9 Tailstock Cup Centers. Use for wood turning.

9 KT 2100—No. 1 Morse taper. Wt. 5 oz. \$1.59

9 KT 2101—No. 2 Morse taper. Wt. 8 oz. 1.79

10 Work Arbors with Chucks. 3-jaw screw-on type. 1/2-in. capacity; 1/2-inch x 20-thread. Morse taper on arbor's shank end.

9 KT 2234—No. 1 Morse taper. Wt. 1 lb. 7 oz. \$2.99

9 KT 2247—No. 2 Morse taper. Wt. 1 lb. 9 oz. 2.99

5 Drill Press Chuck. Key type, to fit No. 33 Jacobs taper. Capacity 0 to 1/2 inch. Key included.

9 KT 2143—Shipping weight 1 pound 11 ounces \$9.99

6 Key-type Chucks. 3-jaw screw-on type for Sears and other electric drills. Key included.

Catalog Number	Fit Threads	Capacity	Shipping weight	Price
9 KT 2972	1/2-in. x 24	1/4 to 1/2 in.	8 oz.	\$2.99
9 KT 2979	1/2-in. x 24	0 to 1/2 in.	9 oz.	5.99
9 KT 2975	1/2-in. x 24	1/4 to 1/2 in.	15 oz.	4.99
9 KT 2973	1/2-in. x 24	0 to 1/2 in.	1 lb.	5.99
9 KT 2980	1/2-in. x 20	1/4 to 1/2 in.	1 lb.	5.99
9 KT 2255	1/2-in. x 18	1/4 to 1/2 in.	3 lbs. 8 oz.	12.99

7 Chuck Keys. Fits Jacobs, Supreme or Sears chucks as indicated below.

Catalog Number	Fits Jacobs Chuck	Supreme Chuck	Sears Chuck	Shpg. wt.	Each
----------------	-------------------	---------------	-------------	-----------	------

For Electric Drills:

9 KT 2051	1, 1A, 1B, 1B5	1A, 1T1	9 KT 2972	4 oz.	49c
9 KT 2073	7, 7L, 7-1A	H17A, 4A, 4B, 4C, 4T1, 4T2	9 KT 2979	7 oz.	69c
9 KT 2058*	MC1, MC2, U4G	B1A, B80A, B81A, 5B0A		4 oz.	49c
9 KT 2059	MC4K61	B13A, B14T33, B14B, B14R, B16A, B16T33	9 KT 2973	4 oz.	69c
9 KT 2033	16N, 18N, 36B, 59B	9F, 9T3, 9D, 24T3, 25T4	9 KT 2255	12 oz.	\$1.49
9 KT 2149	30, 30B	H13A, H13C, 7A, 7B, 7T1, 7T2	9 KT 2975	4 oz.	69c
9 KT 2054	32B, 33B, 33C	36, 3B, 5D		7 oz.	79c

For Drill Press:

9 KT 2052	3A, 3B, 3AE, 6A, 6A2A, 6A33, 6B, 6AE, 34, 34B, 14N, 635C	6B, 6D, 6F, 6T2, 6T6, 6T33, 6T33C, 6F, 6T3, 8D	9 KT 2143	10 oz.	\$1.09
9 KT 2054	11N, 32, 33	3A, 3T2, 5A, 5T33, 15T33, 22T2	9 KT 2142	7 oz.	79c



Independent 4-jaw Chucks

CRAFTSMAN. Precision-made to assure accuracy of performance. Body of chuck is semi-steel casting; has deep jaw slots for greater strength and bearing surface. All four reversible jaws work independently. Especially useful for holding irregularly shaped pieces. Large jaw screw. T-handle wrench. Will fit lathe spindles as indicated below.

Catalog No.	Will fit spindle	Diam.	Shpg. wt.	Each
9 KT 2155	1/2 inch by 16 thread	4 in.	4 lbs.	\$29.99
9 KT 2159	1 inch by 10 thread	4 in.	6 lbs. 2 oz.	29.99
9 KT 2150	1 1/2 inch by 8 thread	6 in.	10 lbs.	46.99
9 KT 21581	1 1/2 inch by 8 thread	8 in.	14 lbs.	59.99



Universal 3-jaw Lathe Chucks

CRAFTSMAN. Fine quality. Heavy-duty self-centering type. Jaws controlled by single screw and pinion gear. Perfect for centering work. Body casting of semi-steel. Alloy metal scroll, alloy steel pinion. Alloy steel jaws heat-treated and hardened, feature raised steps. With inside and outside gripping jaws. T-handle chuck wrench. Body casting is precision-threaded. Will fit lathe spindles as indicated below.

Catalog No.	Will fit spindle	Diam.	Shpg. wt.	Each
9 KT 21407	1 inch by 10 thread	4 in.	5 lbs. 8 oz.	\$49.99
9 KT 2165	1 1/2 inch by 8 thread	5 in.	9 lbs.	59.99
9 KT 2168	1 1/2 inch by 8 thread	6 in.	13 lbs.	74.99



11 Work Arbors. Two steel flanges. Nut on head end for clamping wheels. 1/2-inch x 20-thread.

9 KT 2153—No. 1 Morse taper. Wt. 11 oz. \$1.79

9 KT 2152—No. 2 Morse taper. Wt. 15 oz. 1.79

12 CRAFTSMAN Keyless Chucks. 3-jaw screw-on type with knurled surface for firmer grip. Fit 1/2-inch x 20-thread spindle.

9 KT 2248—1/2-in. capacity. Shpg. wt. 7 oz. \$1.19

9 KT 2243—1/2-in. capacity. Shpg. wt. 9 oz. 1.19

9 KT 2256—1/2-in. capacity. Shpg. wt. 14 oz. 1.49

13 Spur Centers. Use for wood turning.

9 KT 2106—No. 1 Morse taper. Wt. 8 oz. 1.59

9 KT 2107—No. 2 Morse taper. Shpg. wt. 8 oz. 1.79

14 60-degree Centers. Use for metal turning.

9 KT 2110—No. 1 Morse taper. Wt. 5 oz. \$1.29

9 KT 2111—No. 2 Morse taper. Shpg. wt. 8 oz. 1.39

15 Screw Centers. Use for woodworking.

9 KT 2116—No. 1 Morse taper. Wt. 8 oz. 1.99

9 KT 2115—No. 2 Morse taper. Wt. 13 oz. 2.19

16 Crotch Center. For cross drilling round work. V-slot. Steel shank. No. 2 Morse taper.

9 KT 2114—Shipping weight 12 ounces \$2.19

17 High-speed Center Drill. Shpg. wt. ea. 2 oz.

9 KT 20601—1/4-in. size; 3/4-in. body. \$1.29

9 KT 20602—1/2-in. size; 1 1/8-in. body. 1.29

18 Precision Ball-bearing 60° Center. For hard-wood, metal. Recommended for high speeds.

9 KT 2112—No. 1 Morse taper. Wt. 10 oz. \$4.19

9 KT 2113—No. 2 Morse taper. Wt. 12 oz. 4.19

19 Adapter Sleeve. To reduce from No. 2 Morse taper to No. 1 Morse taper.

9 KT 2161—Shipping weight 6 ounces \$2.99

You can equip your entire workshop with power tools and accessories from this book

No Money Down on anything Sears sells

SEE PAGE 96



CRAFTSMAN AC Arc Welders with 16 heats

REG. U.S. PAT. OFF.

180 amp. \$115⁹⁵

230 amp. \$126⁹⁵

- Convenient slide switch lets you select any of 16 heats . . . locks in place
- Big 4-blade fan cools transformer coils . . . helps keep out harmful dust and dirt
- Built-in reactance increases open-circuit voltage for easier arc maintenance

Perfect for bending metal, repairing castings, other maintenance jobs. Fan motor has extra-large oil reservoir for permanent lubrication. Recessed panel protects controls. Varnish dipped and baked transformer.

Cabinet measures 23³/₄ in. high, 14³/₄ in. wide and 23³/₄ in. deep over-all. Skids can be mounted on wheels (9 KT 2048 at right). UL listed. With 18-ft. electrode, 12-ft. ground cables, assorted electrodes, holder, ground clamp, helmet, manual. See guarantee at right, specifications below.

180 amp. Unit. Runs on REA and other rural power lines. NEMA rated. With receptacle.

99 KT 20246N—Wt. 109 lbs. \$6.00 mo. Cash \$115.95

230 amp. Industrial Unit. Runs on 25-arc volts.

99 KT 20126N—Wt. 111 lbs. \$6.50 mo. Cash \$126.95

Set of two 3 inch Rubber Wheels and Axle. Fit

welders above and 99 KT 20135N on facing page.

9 KT 2048—Ship. wt. 1 lb. 12 oz. Set \$3.99

Only at Sears . . . a 230-amp. AC Arc Welder with a built-in 3600-amp. Spot Welder for real versatility

\$209⁹⁵

Same as 99 KT 20126N at left, but features a built-in spot welder . . . ideal for jobs in small shops, auto repair shops, on farms . . . even metal sculpture. Welds mild, stainless and galvanized steel up to 1/4 in. combined thickness. Arc welder has 16 heats from 40 to 230 amperes.

14³/₄ in. wide x 25³/₄ in. deep, 30³/₄ in. high overall. With 18-ft. electrode, 12-ft. ground cables, assorted electrodes, holder, ground clamp, helmet, instructions. See guarantee and specifications below.

Shipping weight 120 pounds.

99 KT 2077N—\$10.00 monthly. Cash \$209.95



CRAFTSMAN
REG. U.S. PAT. OFF.

Economy AC
Arc Welder

180 amp. . . 10 heats

\$96⁹⁵

Designed for all smaller repair work, equipment building jobs. 12 heats. Side handles. Operates perfectly on REA, other rural power lines. Coils and transformer are insulated; helps guard against electrical problems. Fan cools coils; blows away dust and dirt. Motor has an extra-large oil reservoir. Convenient on-off switch. UL listed.

16-gauge steel cabinet with charcoal gray lacquered finish . . . measures 14³/₄ in. wide, 10³/₄ in. deep, 19³/₄ in. high, 18-ft. electrode, 12-ft. ground cables, receptacle, assorted electrodes, holder, ground clamp, helmet, manual. See specifications below, guarantee at right above.

99KT2078N—180-amp. Wt. 85 lbs. \$5.00 mo. Cash \$96.95

99KT2079N—230-amp. Wt. 90 lbs. \$5.50 mo. Cash 105.95



1 Industrial CRAFTSMAN Twin-Carbon Torch. Safety shield acts as guide for accuracy. Brases, solders, heats. Connect to any AC arc welder. Fiberglass handle, sliding control. 2 cord carbons, 3-foot cables, 15³/₄ inches long.

9 KT 20073—Shipping weight 4 lbs. 2 oz. . . . \$14.49

Cord carbons for above torch.

Catalog No. Size in. Ship. wt. Pkg. of Per pkg.

9 KT 2020 1/8 in. 7 oz. 10 \$2.29

9 KT 20211 1/4 in. 9 oz. 10 2.29

9 KT 20221 1/2 in. 11 oz. 10 2.69

2 Electrode Rod Holder. Copper alloy. 200-amp. capacity. Asbestos law covers. For electrodes up to 3/4-inch. Spring adjusted.

9 KT 2071—Shipping weight 1 pound . . . \$5.79

3 Ground Clamps. Made of copper alloy. Use with

current up to 200 amperes.

9 KT 2076—Shipping weight 14 ounces . . . \$2.49

4 Combination Wire Brush and Chipper.

Forged steel head. Quick-change holder.

9 KT 2074—Shipping weight 1 lb. 4 oz. . . \$3.79

9 KT 2081—Extra Brush for (4). Wt. 6 oz. . . \$1.99

Cable Extensions (not shown). Insulated, rubber covered, 25-foot coils.

For ground, electrode cables. Fit all welders on these 2 pages. Also fit electrode cable of other CRAFTSMAN welders except former 99-2016, 99-2023, 99-2030 and 99-2030S.

9 KT 20695—Shipping wt. 8 lbs. . . . Coil \$16.49

For ground cables only of CRAFTSMAN welders

not on these 2 pages. Not for former welders 99-2016,

99-2029 or 99-2082.

9 KT 2069—Shipping weight 8 lbs. 4 oz. Coil \$14.99

For ground, electrode cables. Fit welders

99 KT 2078N, 99 KT 2079N. Also fit former welders

99-2016, 99-2023, 99-2030 and 99-2030S.

9 KT 20697—Shipping weight 6 lbs. 4 oz. Coil \$14.99

GUARANTEE: We will repair without charge any CRAFTSMAN Arc Welder on these 2 pages showing defects in materials or workmanship, if returned within 1 year. This guarantee does not apply to welders used in rental service.

Accessories for
arc welding



5 Industrial Fiber Glass Helmet. Rugged fiber glass shell. Ratchet-type head adjustment. With slide-in lens holder, filter plate and cover glass. Shipping weight 2 pounds 10 ounces.

9 KT 13216—With No. 10 filter lens . . . Each \$12.99

9 KT 13217—With No. 12 filter lens . . . Each 12.99

6 Economy Fiber Glass Helmet. With cover glass, lens holder and No. 10 filter lens.

9 KT 13230—Shipping weight 2 pounds 1 oz. . . \$3.99

7 Welder's Jacket. Sturdy 10-ounce black cotton

twill. Flame-resistant finish. Ties in back. Has

snaps cuffs to give you a snug fit around wrists.

9 KT 13221—Small (30 to 40)

9 KT 13222—Medium (37 to 49)

9 KT 13223—Large (41 to 44)

9 KT 13234—Extra-large (45 to 50)

Shipping weight 1 pound 7 ounces . . . Each \$4.49

"Arc-Weld-It-Yourself" Manual. Describes and

illustrates with 100 pictures all types of AC electric

arc welding. 36 "how-to-do-it" packed pages.

9 KT 20256—Shipping weight 5 ounces . . . \$1.99

Before ordering welder, please read these specifications carefully. Check voltage, cycle, phase and capacity of your line with electric utility company or local REA office.

Catalog No.	Prim. AC (single phase) cy	Amperes max. input	Prim. max. amps short circuit	Number of heats	Heat size	Max. Max. KVA BW	Fuses	Max. open circ. secondary	Duty cycle	Power factor
99 KT 20246N	230	60	55	60	16 (20-180)	8.5	6.8 40 amperes	80 volts	20%	.76
99 KT 20126N	230	60	55	77	16 (40-230)	12.7	8.6 60 amperes	77 volts	20%	.73
99 KT 20155N	230	60	75	120	24 (50-295)	17.3	12.8 75 amperes	80 volts	20%	.73
99 KT 2077N	230	60	55	77	16 (40-230)	12.7	6.8 55 amperes	77 volts	20%	.73
99 KT 2078N	230	60	55	60	12 (60-180)	8.5	6.8 40 amperes	80 volts	20%	.76
99 KT 2079N	230	60	55	60	12 (70-230)	12.4	9.5 55 amperes	75 volts	20%	.73
99 KT 2017N	230	60	75	115	29 (13-295)	17.3	12.8 80 amperes	80 volts	20%	.73
99 KT 2019N	460	60	37.5	57.5	29 (13-295)	17.3	12.8 40 amperes	80 volts	20%	.73
99 KT 2026N	230	60	60	90	16 (40-330)	13.8	9 60 amperes	80v. AC-76dC	20%	.70

*20% at 200 amperes, 30% at 160 amperes, 40% at 110 amperes. **20% at 295 amperes, stick electrode; 20% at 295 amperes, TIG process.



Our best
CRAFTSMAN
AC Arc Welder
24 heats . . . 50 thru
295 amps . . . our
widest selection in
a regular AC welder
\$219⁹⁵

CRAFTSMAN
AC-DC
Arc Welder
16 AC heats . . . 40
thru 230 amperes.
16 DC heats . . . 35
thru 180 amperes
\$319⁹⁵

Wide selection of heats lets you handle almost any maintenance job. Use for cutting metal, brazing, soldering; weld bronze, cast iron. Built-in reactance increases open-circuit voltage on all heats for easier arc maintenance. High velocity fan for cooling transformer coils . . . helps keep out dust and dirt. Fan motor has extra-deep oil reservoir for life-time lubrication. Panel is recessed to protect controls. Skids can be mounted on wheel set 9 KT 2048 listed on page 24. Operates on 30-arc volts. NEMA rated. UL listed. Cabinet 23¹/₂ in. high, 14¹/₂ in. wide, 26¹/₂ in. deep. With 18-ft. electrode, 12-ft. ground cable, assorted electrodes, holder, ground clamp, helmet, manual. See specifications, guarantee on facing page.

99 KT 20155N—Shipping weight 169 lbs. \$11.00 monthly. . . . Cash \$219.95

Here's an arc welder that can handle a wide variety of maintenance jobs. Maximum OCV 80 AC . . . 76 DC. Slide-switch selector lets you select any of 16 heats, locks in place. Straight or reverse polarity. Varnish dipped and baked transformer. Cooling fan keeps welder at high operating efficiency . . . helps protect transformer coils from dust and dirt. Permanently lubricated fan motor. Cabinet 14¹/₂ in. wide; 26¹/₂ in. deep; 23¹/₂ in. high. With 18-ft. electrode, 12-ft. ground cable, assorted electrodes, holder, ground clamp, helmet, manual. See specifications and guarantee on page 24.

F9 KT 2026N—Shipping weight 134 lbs. \$15.50 monthly. . . . Cash \$319.95
SHIPPING NOTE: F9 KT 2026N above, F9 KT 2017N and F9 KT 2019N below, sent freight (rail or truck) or express from Paris, Tennessee factory.



CRAFTSMAN
DC Welder
Powered by 14.2-HP
gas engine . . . 10 heats
Ideal for
contractors . . .
mounted on steel
skids for hauling
on pickup truck

Push-button battery start
\$809⁹⁵
without accessories

Manual start
\$749⁹⁵
without accessories

On-off switch, voltage regulator. Ranges between 50 and 200 amperes (10 heats). Dial any heat you want between tap settings. Takes up to 3/4 in. rods. 14.2 HP Onan engine; 2 cylinders, 4-cycle, air-cooled. 7.3 gallon tank. Auxiliary AC output 3.5 KW (3500 watts), 110-120-v. AC. Power lights, electric tools. 28 arc volts. 50% duty cycle. 36 in. wide; 29 in. deep; 27 1/2 in. high. Manual. See accessory kit (1) below. See guarantee, page 24. Sent freight (rail or truck) or express from factory in Minneapolis, Minn.

Push-button battery start model. Ignition system, 12-volt battery with mounting tray. Shipping weight 430 pounds.
F9 KT 20997N—\$40.00 monthly. Cash \$809.95

Manual starting model. Shpg. wt. 420 lbs.
F9 KT 20996N
\$37 mo. . . . Cash \$749.95

1 Accessory Kit. Two 20-ft. conductor cables, ground clamp, electrode holder, helmet. From Minneapolis factory. Allow postage from C.O. plant.
F9 KT 20998—Shipping weight 13 pounds. . . . Kit \$48.95

T.I.G. Torch Set

Converts AC arc welder to T.I.G. when used with High Frequency Unit at right

Excellent for body and general shop work since it can be used on light gauge as well as metal up to 1/4 in. including stainless steel.

High 200-amp rating is made possible by 3/4-in. tungsten collet and short distance between electrode holder and tungsten. Instant, concentrated heat eliminates damaging pre-heating of metal. Get argon gas for tungsten-inert-gas welding at gas supplier (not incl.). With shutoff valve, regulator. Wt. 4 lbs. 12 oz.
9 KT 2011—\$6.00 mo. . . . \$57.99



\$57⁹⁹

CRAFTSMAN AC Arc Welder with T.I.G. Torch Set for all metals

Inert gas keeps air from welding area when welding aluminum, brass, copper, magnesium . . . high carbon and stainless steel

\$599⁰⁰ 230 primary volts

Wide selection of heats . . . 13 to 295 amps. Fan cooled. Uses 3/32 to 1/4-in. diam. rods . . . 040 to 1/4-in. tungsten rods. Get argon gas for tungsten-inert-gas welding at gas supplier (not incl.). Tubular steel handle. Steel skids. 2 wheels for easy moving. 34 1/2 in. high; 19 1/4 in. wide; 18 1/2 in. deep. 18 ft. electrode cable, 12-ft. ground cable, holder, adapter, helmet, spark-gap gauge; remote control switch, cord, plug. Also: regulator, flow-meter, T.I.G. torch, cables; gas and water hose. Stainless-steel wire brush; nozzles, thoriated tungstens, collets, collet assembly, manual. See specs, guarantee, facing page. See Shpg. Note above.

230-primary Unit. Shpg. wt. 272 lbs.
F9 KT 2017N—\$30 mo. . . . Cash \$599.00
460-primary Volt Unit. Shpg. wt. 273 lbs.
F9 KT 2019N—\$31 mo. . . . Cash \$625.00



High-frequency Welding Accessory

Makes starting and maintaining AC arc easier

\$99⁹⁵

Adds versatility to any AC welder up to 295 amperes, 30% duty cycle. Makes it possible for even a beginner to use electrodes such as low hydrogen and stainless steel. Also facilitates welding with the T.I.G. process when used with torch at left. Operates continuously to maintain arc in both applications. Compact . . . 13 1/4 x 9 1/4 x 8 1/4 in. high. Built-in filter screens out most radio interference. On-off switch. Easily accessible contact points. Simple connection . . . just plug into 230-w. outlet or wire into welder input circuit.

99 KT 20999C—Shipping weight 17 pounds. . . . \$5 monthly. . . . Cash \$99.95



No Money Down on anything Sears sells

SEE PAGE 96

CRAFTSMAN

Sears 25



All our CRAFTSMAN Welding Outfits have five big features

REG. U.S. PAT. OFF.

- All parts expertly hand-fitted to make leak-free connections
- Special relief devices on gas regulators prevent high-pressure damage
- Balanced-pressure non-flash mixer is outside torch handle for safety
- All metal parts solid brass, bronze or other non-ferrous alloys
- Every torch and tip is flame-tested... every pressure regulator is lab-tested

1-stage Welding and Cutting Outfit **\$84.99**

Extra tips (below) cut up to 2 in.; weld with rods up to 1/4 in. No soldered or brazed joints between handle and head. Interchangeable solid copper tips. Trigger-type cutting lever.

With torch, 2 regulators, 3 welding tips (W1 to W3), 1 cutting tip (K2), tip box, 12 1/2 ft. of 3/4-in. Siam-eez hose, 50-mm goggles, assorted welding rods, lighter, wrench, instructions. Not for LP-gas. *\$8.50 monthly.

99 KT 5515C—Shpg. wt. 15 lbs. Cash \$84.99

Welding and Cutting Tips, Oxy-acetylene only.

Welding Tips, Shipping weight 10 ounces.

9 KT 55111—Size W1; welds up to 3/4 in. \$1.59

9 KT 55112—Size W2; welds up to 5/8 in. 1.59

9 KT 55113—Size W3; welds up to 1/2 in. 1.59

9 KT 55114—Size W4; welds up to 3/4 in. 1.59

Cutting Tips, 4 pre-heat flames. Wt. 7 oz.

9 KT 55121—Size K1; cuts up to 1/2 in. 4.69

9 KT 55122—Size K2; cuts 3/4 to 1 in. 4.69

9 KT 55123—Size K3; cuts 1 to 2 in. 4.69

CRAFTSMAN 3/4-inch Siam-eez Welding Hose, 12 1/2-ft. length. For 99 KT 5515C only.

9 KT 5517—Shpg. wt. 2 lbs. 12 oz. Each \$6.29

1-stage Welding Outfit... cuts up to 6-inch thickness **\$104.95** with Cutting Attachment sold separately

Same features as 99 KT 5422K (opposite page), but single stage operation. Cuts metal up to 6 in. thick with attachment 9 KT 5477 on opposite page (not included); welds steel plate up to 3/8 inch thick.

Includes torch, 2 regulators, 5 wide-range welding tips (AA1 through AA5) of 1-piece swaged, solid drawn copper. 25 ft. of 1/2-in. Siam-eez hose, assorted welding rods, 1 lb. Universal flux, 50-mm goggles, 2 wrenches, spark lighter and manual. Use cutting tips for acetylene and LP gas* (see below). Cutting attachment and cutting tips not included.

99 KT 5476K—Wt. 26 lbs. \$10 mo. Cash \$104.95

One pound Flux. For all metals.

9 KT 5410—Shipping weight 1 pound 8 ounces. \$1.09

Tank Adapter for AIRCO (CGA 301) acetylene cylinder, right hand, male threads.

9 KT 5413—Shipping weight 12 ounces. \$2.59

Tank Adapter for small Prest-O-Lite (B) cylinders, right hand, male threads.

9 KT 5414—Shipping weight 12 ounces. \$2.59

The Oxy-Acetylene Welder's Handbook. Shows how to weld, cut and braze. Fully illustrated. 278 pages.

9 KT 5411—Shipping weight 10 ounces. \$3.79



CRAFTSMAN professional-quality Welding, Cutting Accessories

1 Single-stage Oxygen Regulator, 0 to 100, 0 to 4000-lb. gauges; brass cases. Safety release.

9 KT 5430—(UL listed.) Wt. 4 lbs. 12 oz. \$25.99

Single-stage High-pressure Oxygen Regulator, 0 to 300, 0 to 4000-lb. gauges. Delivery pressure adjustable 0 to 150 lbs. Must be used when cutting steel over 3 in. and up to 6 in. thick. UL listed.

9 KT 5448—Shipping weight 6 lbs. 2 oz. \$26.49

Single-stage Acetylene Regulator, 0 to 30 and 0 to 500-lb. gauges; brass cases. UL listed.

9 KT 5431—Shipping weight 4 lbs. 12 oz. \$25.99

Heavy-duty Oxygen Cutting Regulator. Use with 99 KT 5442K, 9 KT 5449 cutting torches at left. Reduces extremely high gas pressure, 0 to 300, 0 to 4000-lb. gauges; brass cases. UL listed.

9 KT 5455—Shipping weight 8 lbs. 2 oz. \$37.99

Heavy Duty Acetylene, LP Gas* Regulator. Use with 99 KT 5442K, 9 KT 5449 cutting torches at left. Reduces extremely high gas pressure, 0 to 30, 0 to 500-lb. gauges; brass cases. UL listed.

9 KT 5456—Shipping weight 8 lbs. 2 oz. \$37.99

2 Welding Torch. Same as in outfits 99 KT 5476K, 99 KT 5422K. 17 1/2 in. long. Forged Naval brass 6-in. gooseneck—won't bend. For welding up to 1-in. thick steel, use oxy-acetylene only. Use with acetylene or LP-gas* for brazing, soldering, heating, bending... welding non-ferrous alloys. Cuts steel with 9 KT 5477 on facing page.

9 KT 5474—(UL listed.) Wt. 3 lbs. 2 oz. \$18.99

2 12-inch Mixing Chamber. Forged Naval brass.

9 KT 5476K or 9 KT 5474 when using welding tip 9 KT 54417 or 9 KT 54418.

9 KT 5488—Shpg. wt. 1 lb. 10 oz. \$11.49

4 Siam-eez Welding Hose, 1/2-in. inside diam. Heavy-duty oxygen hose and acetylene hose vulcanized together to form 1 unit. Tightly braided rayon cord reinforcement increases safety. Cover resists flame, heat, oil, grease, abrasion, weather. Brass couplings. Use also with LP-gas.* 25 feet long.

9 KT 5427—Shipping weight 6 lbs. 7 oz. \$10.99

5 Tip Cleaners. In case. Shipping weight 3 oz.

9 KT 5425—For welding tips. Set of 9. Set \$2.19

9 KT 5445—For cutting tips. Set of 10. Set \$2.19

*LP-gas refers to bottled propane, butane or mixtures of the two gases.

6 Welding Tips. Heavy one-piece swaged solid drawn copper. Polished bore. For welding steel, use oxy-acetylene only. For brazing, soldering, heating, bending, welding non-ferrous alloys... use oxy-acetylene or LP-gas.*

Shipping weight each 6 ounces. Each \$2.69

Catalog No. Size Cap. in. Catalog No. Size Cap. in.

9 KT 54410 AA-0 Soldering 9 KT 54415 AA-5 3/8 to 3/4

9 KT 54411 AA-1 3/8 to 1/2 9 KT 54416 AA-6 1/2 to 3/4

9 KT 54412 AA-2 3/4 to 1 9 KT 54417 AA-7 3/4 to 1

9 KT 54413 AA-3 1 to 1 1/2 9 KT 54418 AA-8 1 and up

9 KT 54414 AA-4 1 1/2 to 2

Catalog No. Size Cut Steel Catalog No. Size Cut Steel

7 Cutting Tips. For oxy-acetylene only. Use with CRAFTSMAN cutting attachment 9 KT 5477, former 9-5444. One-piece swaged solid drawn copper. Has 4 pre-heat flames.

Shipping weight each 6 ounces. Each \$4.29

9 KT 54671 B1 up to 1/4 in. 9 KT 54474 B4 1 1/2 to 3 in.

9 KT 54472 B2 1/4 to 1/2 in. 9 KT 54475 B5 3 to 6 in.

9 KT 54473 B3 1/2 to 1 1/2 in.

Oxy-Acetylene Cutting Tips. As above, but with six pre-heat flames for better pre-heat distribution.

Shipping weight each 6 ounces. Each \$5.29

9 KT 54672 B8 1/4 to 1/2 in. 9 KT 54675 B8A 1 1/2 to 3 in.

9 KT 54673 B8B 1/2 to 1 1/2 in. 9 KT 54675 B8B 3 to 6 in.

8 Cutting Tips for Oxy-LP-gas* only. 2-pc., easily cleaned.

For cutting attachment 9 KT 5477 only (opposite page). Shipping weight each 7 ounces. Each \$4.99

9 KT 54781 B1 up to 1/4 in. 9 KT 54784 B1-4 1 1/2 to 3 in.

9 KT 54782 B1-2 1/4 to 1/2 in. 9 KT 54785 B1-5 3 to 6 in.

9 KT 54783 B1-3 1/2 to 1 1/2 in.

Oxy-acetylene Cutting Tips for 9 KT 5449 cutting torch (at left). One-piece construction.

Shipping weight each 5 ounces. Each \$4.49

9 KT 54511 C1 1/4 to 1/2 in. 9 KT 54515 C5 3 to 5 in.

9 KT 54512 C2 1/2 to 3/4 in. 9 KT 54516 C6 5 to 7 in.

9 KT 54513 C3 3/4 to 1 1/2 in. 9 KT 54517 C7 7 to 9 in.

9 KT 54514 C4 1 1/2 to 3 in. 9 KT 54518 C8 9 to 12 in.

Oxy-LP-gas* Cutting Tips for 9 KT 5449 cutting torch (at left). Two-piece. Permit pre-heat adjustment.

Shipping weight each 5 ounces. Each \$6.49

9 KT 54521 C1-1 1/4 to 1/2 in. 9 KT 54525 C1-5 3 to 5 in.

9 KT 54522 C1-2 1/2 to 3/4 in. 9 KT 54526 C1-6 5 to 7 in.

9 KT 54523 C1-3 3/4 to 1 1/2 in. 9 KT 54527 C1-7 7 to 9 in.

9 KT 54524 C1-4 1 1/2 to 3 in. 9 KT 54528 C1-8 9 to 12 in.



\$149.95

Heavy-duty Cutting Outfit... cuts up to 12-in. thick steel


Professional quality. 20 1/4-in. long torch. 3 stainless steel gas tubes, lever. All valves outside handle for safety. Cuts steel up to 12 in. thick with tips C1 to C8 (at right). Forged brass, high-capacity regulators. 2 1/2-in. diam. gauge in brass case. Oxygen 0 to 300 and 0 to 4000 lbs.; acetylene 0 to 30 and 0 to 500 lbs. Torch approved by Associated Factory Mutual Fire Insurance Companies.

With torch; 2 regulators; 25-ft. Siam-eez hose (1/2-in.); 50-mm goggles; 2 wrenches; 3 cutting tips (C3, C4, C5) for cutting 1/2 to 5-in. steel; spark lighter; instructions included. Shpg. wt. 33 lbs.

99 KT 5442K—\$11.50 mo. Cash \$149.95

9 KT 5449—Torch only. Wt. 4 lbs. 7 oz. \$49.99

In all Welding Outfits on these two pages, torches and regulators are UL listed.

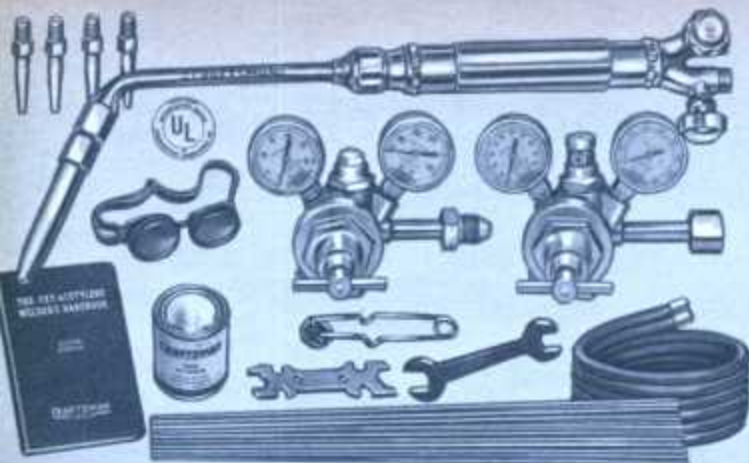

Our Best CRAFTSMAN Welding Outfit

REG. U.S. PAT. OFF.

- 2-stage regulators eliminate frequent adjustments, keep pressure constant
- Cuts up to 6-in. thickness with attachment 9KT5477, sold separately

Pressure at torch stays same whether cylinder is full or nearly empty. *Adjust once;* 2-stage regulators keep pressure constant even as gas supply diminishes.

Weld ferrous and non-ferrous metals with oxygen and acetylene... non-ferrous metals with oxygen and LP-gas.*

Braze, solder, heat or bend with oxygen and acetylene or LP-gas. Double "O" ring makes leak-free connections to torch. All parts hand-fitted. Forged brass-bodied regulators with two 2 1/2-inch diam. pressure gauges, brass cases... oxygen 0 to 100 and 0 to 4,000 pounds, acetylene 0 to 30 and 0 to 500 pounds.

Torch turns off with left or right hand without disturbing your setting... non-flash mixer for added safety. Torch is

17 1/2 in. long. All other metal parts solid brass, bronze, or of other non-ferrous alloys. Torch, regulators UL listed. Approved by Associated Factory Mutual Insurance Companies, also N.Y. F.D. Certificate of Approval No. 906.

Outfit includes: 5 wide-range welding tips (AA1 through AA5) of 1-pc. swaged, solid drawn copper; 25 ft. of Siam-erz 1/4-in. hose; assorted welding rods; 1-lb. Universal flux; 50-mm goggles; spark lighter; 2 wrenches, 278-page handbook.

Use outfit for cutting with cutting attachment 9KT5477 (see below). For cutting tips for acetylene or LP-gas*, see opposite page. *Cutting attachment and cutting tips not included.*

99 KT 5422K—Wt. 28 lbs. \$122.95

CRAFTSMAN 2-stage Regulators for conversion. Get constant pressure. Convert your 1-stage outfit to 2-stage with these regulators. Same quality as in outfit above.

Two-stage Acetylene Regulator.

9 KT 5438—Wt. 5 lbs. 8 oz. \$37.99

Two-stage Oxygen Regulator.

9 KT 5437—Wt. 5 lbs. 8 oz. \$37.99

*The term LP-gas refers to bottled propane, butane or mixtures of these two gases



Heating-Brazing Set

Use with "B"-type Prest-O-Lite acetylene cylinder (not included). Requires pressure up to 4 pounds for largest tips. Needs no oxygen or compressed air.

Complete with handle, 3 heating tips, soldering copper, paint-burning tip, tank connection, tip cleaner, 5-foot hose and easy-to-follow instructions.

9 KT 5446—Wt. 1 lb. 14 oz. Set \$12.49



Cutting Attachment

CRAFTSMAN. Cuts steel up to 6 inches thick with acetylene or LP-gas* and proper tips. Use with 99KT5422K (above), 99KT5476K or 9KT5474 (opposite page). 3-tube construction. Leak-free connection. B-3 (acetylene) tip. For LP-gas* tips, see opposite page. Instructions included. UL listed.

9 KT 5477—Shpg. wt. 3 lbs. \$20.99

Carrying Case for welding outfit

\$19.99

1 Sturdy steel case carries welding supplies and accessories... right to the job. Fitted with holders to fasten each piece securely in place, keep each tool where it belongs. Case measures a roomy 9 1/2 x 9 1/2 x 2 1/4 inches. *Without tools.*

99 KT 5423C—Shpg. wt. 19 lbs. \$19.99

2 **CRAFTSMAN No. 1 all-purpose Brazing Flux.** Use with brazing rods on steel, malleable iron, cast iron and galvanized iron. Also for welding copper, brass, bronze and copper alloys. 4-oz. can.

9 KT 2056—Shpg. wt. 8 oz. Can 59c

3 **CRAFTSMAN Aluminum Brazing, Soldering Kit.** Use in home or shop. Joins aluminum to aluminum and other metals. Heat with gas welder or propane torch. With No. 718 aluminum brazing wire, No. 804 aluminum soldering wire (melting point 400° F). Aluminum soldering and brazing fluxes, instructions included.

9 KT 2039—Shpg. wt. 8 oz. Kit \$2.49

CRAFTSMAN Welding Rods

REG. U.S. PAT. OFF.

4 **CRAFTSMAN Mild-steel Contact Rod with self-starting tip.** For use on thin metals requiring low amperage. Proper burning speed and arc distance automatically maintained by wire coating.

Current ignites rod's conductive match head. Restart at any point. Meets A.W.S. Specs. 6024. Sold in 5-lb. pkgs. only.

Shipping weight 5 lbs. 10 oz.

Diam., length	Catalog No.	Pkg. of	Shpg. wt.	Pkg.
1/8x9 in.	9 KT 20641	5 lbs.	5 lbs. 8 oz.	\$3.49
1/8x9 in.	9 KT 20640	5 lbs.	5 lbs. 8 oz.	3.19
1/8x9 in.	9 KT 20646	5 lbs.	5 lbs. 8 oz.	4.19

As above without starting tip. Meet A.W.S. Specs. 6024. AC-DC (either polarity).

Diam., length	Catalog No.	Pkg. of	Shpg. wt.	Pkg.
1/8x12 in.	9 KT 20291	5 lbs.	5 lbs. 8 oz.	\$3.49
1/8x14 in.	9 KT 20295	5 lbs.	5 lbs. 8 oz.	3.19
1/8x14 in.	9 KT 20296	10 lbs.	11 lbs.	4.49
1/8x14 in.	9 KT 20298	10 lbs.	11 lbs.	4.39

Mild-steel Welding Rods. Meet A.W.S. Specs. 6024. Uses AC or DC. For deep groove, fillet. 14 in. long. 10 lb. pkg. Shpg. wt. 11 lbs.

9 KT 20101—1/2 inch. Package \$4.39

9 KT 20102—1/2 inch. Package 4.39

Professional Assortment. 11 types. 25-lb. pkg.

99 KT 2047K—Shpg. wt. 27 lbs. Package \$12.49

Special Form-pack Assortment. 25 lb. pkg.

99 KT 20472K—Shpg. wt. 27 lbs. Package \$12.49

Cat. No. Diam., length Pkg. wt. Shpg. wt. Pkg.

Mild Steel Rods. For AC-DC (reverse polarity). Class E-6011.

9 KT 20010 1/8x12 in. 5 lbs. 5 lbs. 9 oz. \$3.49

9 KT 20017 1/8x12 in. 5 lbs. 5 lbs. 9 oz. 2.69

9 KT 20031 1/8x14 in. 10 lbs. 11 pounds 4.79

9 KT 20036 1/8x14 in. 10 lbs. 11 pounds 4.69

9 KT 20038 1/8x14 in. 10 lbs. 11 pounds 4.69

Cast-iron Rods. Nickel wire electrode. Machineable. AC-DC (either polarity).

9 KT 20227 3/32x13 1/2 in. 1 lb. 1 lb. 5 oz. \$3.29

9 KT 20272 3/32x13 1/2 in. 1 lb. 1 lb. 5 oz. 3.19

Cast-iron Rods. Steel core. Non-machineable. AC-DC (reverse polarity).

9 KT 20550 1/8x12 in. 5 lbs. 5 lbs. 9 oz. \$2.99

9 KT 20555 1/8x14 in. 5 lbs. 5 lbs. 9 oz. 2.39

Hard-surfacing Rods. AC-DC (either polarity). Class: Medium chrome carbon.

9 KT 20040 1/8x12 in. 5 lbs. 5 lbs. 9 oz. \$4.19

9 KT 20043 1/8x14 in. 5 lbs. 5 lbs. 9 oz. 3.89

9 KT 20046 1/8x14 in. 5 lbs. 5 lbs. 9 oz. 3.69

CRAFTSMAN Cutting Rods. Cuts through all metals. Use with 90 amp. or larger welders. AC-DC (straight polarity). 1-lb. pkg. only.

9 KT 2028—1/8x12 in. Wt. 1 lb. 3 oz. Pkg. 89c

9 KT 20282—1/8x14 in. Wt. 1 lb. 3 oz. Pkg. 79c

5 Gas Rod Assortment. Over 4 pounds (approx. 106 rods) with two 4-ounce cans of flux. For welding and brazing almost all metals.

Includes approximately the following amounts of rods: four 3/32-in. aluminum; six 1/16-in. die-cast zinc; 72 copper-coated steel (1/16, 3/32, 1/4, 3/8 in.); four 3/8-in. cast iron; sixteen 3/32, 1/4-in. bronze; four 3/32-in. flux-coated bronze. All rods are 18 inches long.

9 KT 2006—Wt. 5 lbs. 11 oz. Pkg. \$6.89

"Hot Rodder" Gas Welding Rod Assortment.

For auto repair, hobbyists, small repair shops. Includes 1 pound each of 1/16, 3/32-inch copper coated rods; 1 pound each of 3/32, 1/4-inch Hi-Test frame rods.

Also 3/32-inch flux-coated and nickel-silver brazing rods and 3/8-inch die-cast Aladdin rods. 24 in. long (18-in. Aladdin).

9 KT 20492—Wt. 5 lbs. 14 oz. Pkg. \$4.49

6 Copper-coated Gas Welding Rods designed specially for mild steel.

Shipping weight package 6 pounds.

99 KT 20401C—1/8x36 in. about 160. Pkg. \$2.19

99 KT 20403C—1/8x36 in. about 70. Pkg. 2.09

99 KT 20405C—1/8x36 in. about 40. Pkg. 1.99

Gas Brazing Rods. For steel, cast iron and copper alloys.

Shipping weight package 2 pounds.

99 KT 20451C—1/8x36 in. Pkg. of 12. Pkg. \$2.19

99 KT 20453C—1/8x36 in. Pkg. of 6. Pkg. 1.89

99 KT 20455C—1/8x36 in. Pkg. of 3. Pkg. 1.79

Flux-coated Gas Brazing Rods. 1-lb. pkg.

Shipping weight package 1 lb. 4 oz.

9 KT 20464—1/8x18 in. about 25. Pkg. \$2.39

9 KT 20466—1/8x18 in. about 14. Pkg. 2.19



Wide selection for special needs

4



5

6

No Money Down on anything Sears sells


SEE PAGE 96

OPEN KIDZ Sears 27

CRAFTSMAN Endless-blade Hack Saw

REG. U.S. PAT. OFF.

Cuts up to 10 times faster than reciprocal-type

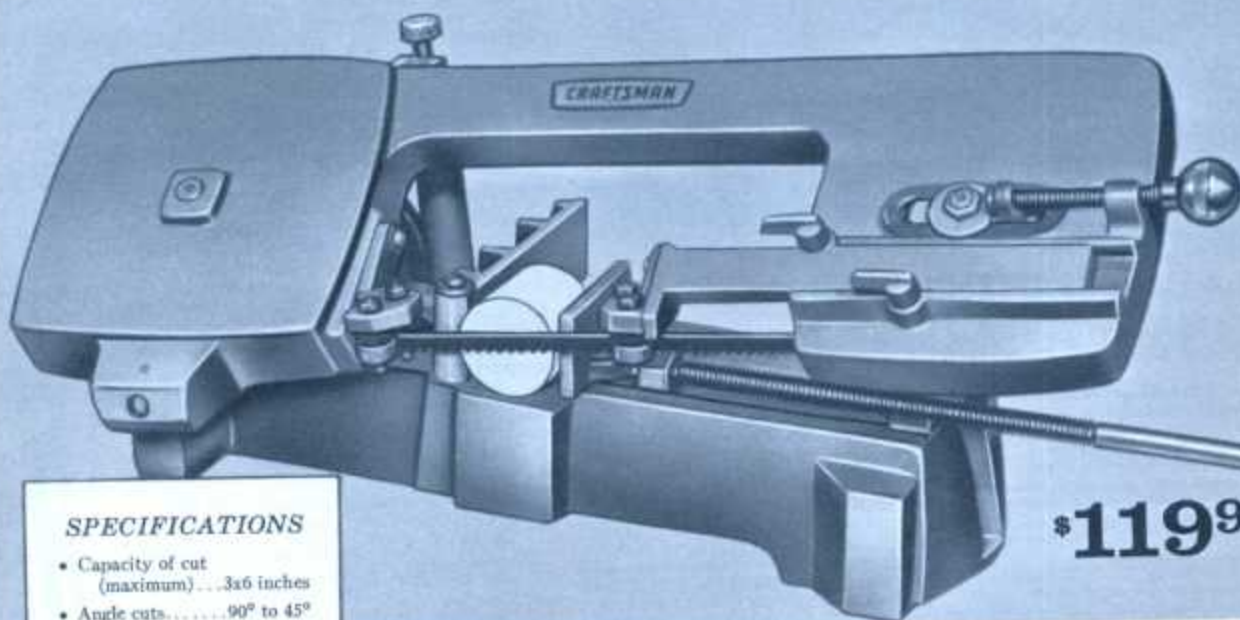

SPECIFICATIONS

- Capacity of cut (maximum)....3x6 inches
- Angle cuts.....90° to 45°
- Bearings.....bronze, steel
- Motor needed (minimum)..... $\frac{1}{2}$ HP
- Base size....6 $\frac{1}{4}$ x22 $\frac{3}{4}$ inches
- Mounting size....5 $\frac{3}{4}$ x19 $\frac{3}{4}$ inches
- Blade..... $\frac{1}{4}$ in. wide, .020 in. thick, 60 in. long; 14 teeth per inch

\$119⁹⁵

Cuts a 2-inch, cold-rolled steel bar in just 2 $\frac{3}{4}$ minutes!

You can cut through steel fast...zip through cast iron, brass, aluminum even faster. Handles any shape metal—rounds, flats, tubing, angles, etc. Quick-action vise jaw adjusts in seconds for angle cuts from 90° to 45°.

Hydraulic control sets rate of blade feed. Saw blade adjusts through adjustable guide rollers. Blade speeds along at 135 feet per minute. Nylon pinion reduces noise.

With motor pulley and machine pulley (single groove; $\frac{1}{4}$ -inch bore). V-belt included. Use at least $\frac{1}{2}$ -HP 1725-RPM motor.

Saw without motor.

99 KT 2292N—Shpg. wt. 76 lbs. \$6 mo. Cash \$119.95

Saw with CRAFTSMAN $\frac{1}{2}$ -HP capacitor motor. Motor has sleeve bearings. 1725 RPM. 110-120-volt, 60-cycle AC. 4-ft. cord.

99KT2292N2—Shpg. wt. 97 lbs. \$7.50 mo. Cash \$144.95

Extra Metal-cutting Blades for above. Shpg. wt. 6 oz.

9 KT 22926—10 teeth per in. Cut over 1 in. Ea. \$3.29

9 KT 22927—14 teeth per in. Cut to 1 in. Ea. 3.29

No Money Down on anything Sears sells

SEE PAGE 98



SPECIFICATIONS

- Capacity, maximum....4x4 inches
- Angle cuts.....90° to 45°
- Bearings.....porous bronze
- Machine pulley.....6 $\frac{1}{4}$ inches
- Single groove.....
- Motor pulley.....2-inch

- Motor recommended (not included)..... $\frac{1}{2}$ HP, 1725 RPM
- Base size.....6x24 inches
- Mounting size....5 $\frac{3}{4}$ x19 $\frac{3}{4}$ inches
- Stroke.....5 inches; 60 strokes per min. at 400 RPM

CRAFTSMAN
REG. U.S. PAT. OFF.

Reciprocal-type Hack Saw

Semi-automatic for "hands-off" working

\$89⁹⁹

Just set it and leave it

You can do other work while it cuts by itself...accurately and automatically. Special automatic mechanism lifts blade on backward stroke...helps prolong life of blade.

Cuts any shape of iron, brass, aluminum, etc. Has big 4x4-inch maximum capacity to handle large work pieces. Heavy cast-iron vise locks quickly and easily...anchors stock solidly in place. Adjusts for angle cuts from 90° to 45°.

Cast semi-steel slide and arm with adjustable cone-type arm pivot. Taken any standard 12-inch power hack saw blade (1 included). Arm length extended is 29 inches; not extended, 26 inches. Has 5-inch stroke; operates at 60 strokes per minute at 400 RPM. With 6 $\frac{1}{4}$ -inch machine pulley, single groove, 2-inch motor pulley and $\frac{1}{4}$ -inch wide x 42-inch long V-belt. Motor not included.

99 KT 2294L—Shpg. wt. 61 lbs. \$5.00 mo. Cash \$89.99


Saw with CRAFTSMAN $\frac{1}{2}$ -HP Motor. 1725 RPM split phase. Sleeve bearings. 110-120-volt, 60-cycle AC, 4-ft. cord.

99 KT 22942L2—Shpg. wt. 79 lbs. \$5.50 mo. Cash \$104.95

CRAFTSMAN High-Speed Power Hack Saw Blades. For above. Special alloy steel. 5 $\frac{1}{2}$ x12 inches long. Package of 2.

9 KT 65822—14 teeth per inch. Shpg. wt. 5 oz. Pkg. \$2.19

9 KT 65823—18 teeth per inch. Shpg. wt. 5 oz. Pkg. 2.19



Bench Accessories

1 CRAFTSMAN Workbench Lamp. Two ball-and-socket joints, one swivel joint. Reflector has nylon protector. 36 inches long. 43-foot cord. UL listed. Shipping weight 3 lbs. 7 oz.
9 KT 2504 \$6.99

2 18-in. Bench Lamp. Flexible gooseneck. Also for walls. 6-foot cord. UL listed. Shipping weight 3 pounds.
9 KT 2536 \$4.99

3 CRAFTSMAN Power-Pak. For power tool benches. Extruded aluminum. On-off toggle switch for motors up to 1 HP, 110-120-volt, 15-ampere AC. Safety light tells power-pak is "on." Two 3-prong outlets. UL listed. Shipping weight 1 pound.
9 KT 2134 \$4.99



CRAFTSMAN REG. U.S. PAT. OFF. Power Tool Benches

Give rigid, reliable support. Heavy-duty, bolted steel frames; 2 steel cross-slide rails. Bolts, instructions included. Unassembled. For motor mount, wheel set, see (6), (7).



Fits these bench-type power tools	Catalog Number of tool	Motor Mount needed
4 16 1/4 x 30-inch. Adjusts 25 1/4 to 29 1/4 inches high. 99 KT 10525K—Shipping weight 25 pounds.....		\$16.99
Band Saw.....	99 KT 2426L	1
Belt Sander.....	99 KT 2254L	1
Bench Saw.....	99 KT 2428N	none
	99 — 2218	none
	99 — 2450	none
Drill Press.....	99 KT 2454N	none
Hack Saw.....	99 KT 2292N	1
Jig Saw.....	99 KT 2072N	1
Jointer-Planer.....	99 KT 2186L	1
5 26 x 76-inch. Adjusts 22 1/4 to 31 1/4 inches high. 99 KT 1071K—Shipping weight 39 pounds.....		\$21.99
Bench Saw.....	99 KT 2428N	none
	99 KT 2990N	none
	99 — 2218	none
Shaper.....	99 KT 2394N	none
	99 KT 2935N	none
Radial-Arm Saw.....	99 — 2931	none
	99 KT 2941N	none
	99 — 2940	none



Motor Mount and Wheels


6 Swivel Motor Mount. For 99 KT 10525K bench above. Maintains V-belt tension. Made of rugged steel to keep motor vibration at a minimum. Shipping weight 1 pound 9 ounces.

9 KT 2730 \$1.69

7 Rubber Wheels. For 99 KT 10525K and 99 KT 1071K. Box of 2 rubber wheels, adds mobility to bench-mounted tools.

Shipping weight 1 pound 12 ounces.

9 KT 2244 Box \$1.99

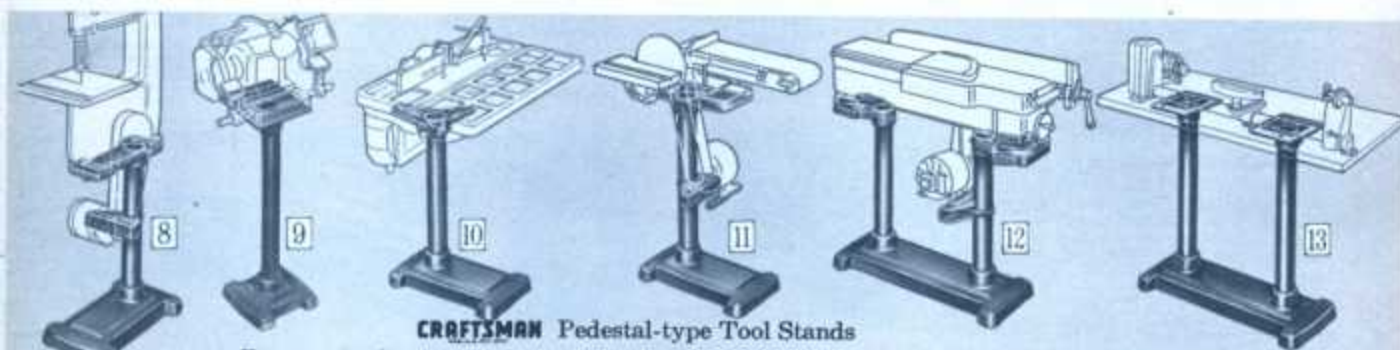

CRAFTSMAN Pedestal-type Tool Stands

Heavy cast-iron base gives maximum stability. Rigid steel column and cast-iron brackets keep tool absolutely level. Big, brawny strength—yet they take less space than box-type benches. Motor mount on (8), (11) and

(12) fits snugly under the power tool or to the rear... forms one compact unit.

Metal belt guard (sold separately below) provides added safety by housing V-belt from motor to power tool.

Catalog No.	Fits Tool	Wt.	Price	Catalog No.	Belt Guard	Shpg. wt.	Price
(8) 99 KT 2937L	2-wheel Band Saw—99KT2426L	48 lbs.	\$32.99	9 KT 2907	4 lbs. 2 oz.		\$6.49
(9) 99 KT 2964K	Grinders—99KT1940K, 99KT1941K, 99KT1958K, 99KT1959K	34 lbs.	19.99		None		
(10) 99 KT 2225L	Wood Shaper—99KT2394N	41 lbs.	29.99	9 KT 2231	3 lbs. 2 oz.		7.29
(11) 99 KT 2204L	Belt Sander—99KT2254L	49 lbs.	49.99	9 KT 29082	4 lbs. 2 oz.		7.49
(12) 99 KT 29602N	6 1/2-in. Jointer-Planer—99KT2362N	71 lbs.	49.99		None		
(13) 99 KT 2249N	Wood Turning Lathe—99KT2388N	74 lbs.	42.99		None		
(14) 99 KT 2228L	10-in. Bench Saw—99KT2970N, 99-2999	60 lbs.	32.99		None		
	8-in. Bench Saw—99KT2428N				None		

Casters. For tool stands at right (except 99 KT 2964K). Give power tools mobility. Threaded holes in stands for installing. Package of 4 heavy-duty steel casters. Shpg. wt. 1 lb. 7 oz.
9 KT 2819—Pkg. \$5.99



CRAFTSMAN Instruction Manuals give you dozens of new ideas for using your power tools

15 "Power Tools and how to use them." 192 pages. Includes 1100 illustrations which cover 600 operations.
9 KT 2912—Wt. 11 oz. \$1.59

16 "The Drill Press." 32 pages. 200 illustrations cover over 100 operations.
9 KT 2921—Shpg. wt. 2 oz. 39c

You can equip a complete POWER TOOL SHOP for No More \$ Down... see page 98

17 "The Circular Saw." 32 pages. 215 illustrations. Describes use of bench, electric hand, swing, builders' and radial saws; instructions for making 30 wood joints.
9 KT 2926—Shpg. wt. 2 oz. 39c

18 "The Jig Saw and Band Saw." Contains 32 pages with more than 160 illustrations. Describes many short-cuts in the efficient operation of jig saws and band saws.
9 KT 2919—Shpg. wt. 2 oz. 39c

19 "The Jointer, Shaper and Thickness Planer" Instruction Book. A complete manual of operation, 32 pages, over 200 illustrations. Describes over 100 operations.
9 KT 2916—Shpg. wt. 2 oz. 39c

20 "The Wood Lathe." 32 fully illustrated pages. Describes more than 150 wood-turning operation. Tells how to mount attachments. Contains 230 illustrations.
9 KT 2920—Shpg. wt. 2 oz. 39c

21 "How to Sharpen" Manual. Shows how to give almost any cutting tool a keen edge. Contains 32 informative pages with more than 200 illustrations.
9 KT 2924—Wt. 2 oz. 39c

22 "Arc Weld It Yourself" Manual. Comprehensive training manual detailing welding techniques. 32 pages; about 100 illustrations.
9 KT 20256—Wt. 5 oz. 79c

23 Metal Lathe Manual. 258 pages of practical metal lathe operations (includes machinists' tables). Illustrations.
9 KT 2925—Wt. 1 lb. 4 oz. \$2.59

24 "The Oxy-Acetylene Welder's Handbook." Practical manual for both beginners and experienced welders. Shows how to weld, cut and braze. 278 pages, many with illustrations.
9 KT 5411—Wt. 10 oz. \$3.79



Abrasive Sheets and Discs

Sanding Belts

Long-lasting aluminum oxide abrasive... low as **59c**

Tough, fast-cutting aluminum oxide grain on cloth-backed belt. One-piece construction. For portable and bench type sanders. Use for sanding wood, grinding down most metal or plastic surfaces.

3x21-inch Belt.
9 KT 22301—Fine
9 KT 22302—Medium
9 KT 22303—Coarse
Shpg. wt. 4 oz. Each **59c**

3x24-inch Belt.
9 KT 22351—Extra Fine
9 KT 22352—Fine
9 KT 22353—Medium
9 KT 22354—Coarse
9 KT 22355—Extra Coarse
Shpg. wt. 6 oz. Each **59c**

3x27-inch Belt.
9 KT 22310—Extra Fine
9 KT 22311—Fine
9 KT 22312—Medium
9 KT 22313—Coarse
Shpg. wt. 4 oz. Each **59c**

Extra Coarse, open coat.
Shpg. wt. each 4 oz.
9 KT 22314—Each **79c**

4x24-inch Belt.
9 KT 22332—Extra fine.
9 KT 22333—Fine
9 KT 22334—Medium
9 KT 22335—Coarse
9 KT 22336—Extra coarse
Shpg. wt. 7 oz. Each **79c**

4x24-inch Belt.
9 KT 22337—Fine
9 KT 22338—Medium
9 KT 22339—Coarse
Shpg. wt. 7 oz. Each **79c**

4x26-inch Belt.
9 KT 22151—Fine
9 KT 22152—Medium
9 KT 22153—Coarse
Shpg. wt. 7 oz. Each **89c**

6x48-inch Belt.
9 KT 21671—Fine
9 KT 21672—Medium
9 KT 21673—Coarse
Wt. 12 oz. Each **\$1.49**

Microton® nylon Polishing and Finishing Belts

3x21-inch.
9 KT 22271—Fine
9 KT 22272—Medium
9 KT 22273—Coarse
Shpg. wt. 7 oz. Each **\$1.59**

4x24-inch.
9 KT 22261—Fine
9 KT 22262—Medium
9 KT 22263—Coarse
Shpg. wt. 7 oz. Each **\$2.39**

Sanding Sheets

No-load Paper. Just shake to clean. Fine grit (silicon carbide) for smooth finish. Medium and coarse grits (aluminum oxide) for rougher finish. 9x11-inch sheets. Package of 6.

Catalog No.	Grit	Wt.	Pkg.
9 KT 67601	Super fine	4 oz.	69c
9 KT 67602	Medium fine	5 oz.	69c
9 KT 67603	Fine	6 oz.	69c
9 KT 67604	Medium	8 oz.	69c
9 KT 67605	Coarse	10 oz.	79c

Aluminum Oxide Paper. Paper-backed for hard wood—better than garnet. Cloth-backed for metal, dry or with oil—better than emery.

Paper-backed, 9x11-in. sheets.
9KT27411—X-Fine 9KT27412—Fine
9KT27413—Med. 9KT27414—Coarse
Pkg. of 6, Wt. pkg. 1 lb., Pkg. **69c**

Cloth-backed, 9x11-in. sheets.
9KT67891—Fine 9KT67892—Med.
9KT67893—Coarse
Pkg. of 3, Wt. pkg. 9 oz., Pkg. **79c**

Garnet Paper. Outlasts flint 3 to 1. Thick back, 9x11 inches.
Package of 6.....Package **59c**

Catalog No.	Grit	Shpg. wt.
9 KT 67956	X-Fine	6 ounces
9 KT 67957	Fine	8 ounces
9 KT 67958	Medium	11 ounces
9 KT 67959	Coarse	1 pound

Emery Cloth. Use dry or with oil on non-plated metals, 9x11 inches.
9 KT 67981—Fine 9 KT 67982—Med.
9 KT 67983—Coarse
Pkg. of 3, Wt. pkg. 7 oz., Pkg. **49c**

Flat Sandpaper. For soft woods only, 9x10 inches.
Package of 12.....Package **39c**

Catalog No.	Grit	Shpg. wt.
9 KT 67931	X-Fine	8 oz.
9 KT 67932	Fine	10 oz.
9 KT 67933	Medium	12 oz.
9 KT 67934	Coarse	1 lb. 2 oz.

Silicon Carbide Waterand Finishing Paper. Use wet or dry on wood or metal, 9x11-in. sheets. Pkg. of 6.
9KT30111—Super fine; 9KT30112—Fine
9 KT 30113—Med. fine
Shpg. wt. pkg. 4 oz.....Pkg. **69c**

Aluminum Oxide Sanding Sheets. Costs less to do a job with aluminum oxide... tough grits outlast most other abrasives. Paper-backed for hand or machine work on hard woods. For 9x11 in. sheets, see below left.

3x7 1/2-inch Sheets.
Package of 18 sheets.
9 KT 27461—Fine
9 KT 27462—Medium
9 KT 27463—Coarse

Shipping weight per package 5 ounces.
Package.....**59c**

3 1/2 x 9-inch Sheets.
Package of 12 sheets.
9 KT 25131—Fine
9 KT 25132—Medium
9 KT 25133—Coarse

Shipping weight per package 9 ounces.
Package.....**59c**

4 1/2 x 11-inch Sheets.
Package of 12 sheets.
9 KT 27401—Fine
9 KT 27402—Medium
9 KT 27403—Coarse

Shipping weight per package 11 ounces.
Package.....**69c**

No-load Sanding Sheets. Won't clog... even paint shakes free. Rubber-treated paper backing adjusts to surface, gives better grip. For 9x11 in., see below left.

Fine grits are silicon carbide. Medium, coarse grits are aluminum oxide.

3x7 1/2-inch Sheets.
Package of 12 sheets.
9 KT 67652—Fine
9 KT 67653—Medium
9 KT 67654—Coarse

Shipping weight per package 7 ounces.
Package.....**59c**

3 1/2 x 9-inch Sheets.
Package of 12 sheets.
9 KT 67642—Fine
9 KT 67643—Medium
9 KT 67644—Coarse

Shipping weight per package 8 ounces.
Package.....**69c**

4 1/2 x 11-inch Sheets.
Package of 12 sheets.
9 KT 67632—Fine
9 KT 67633—Medium
9 KT 67634—Coarse

Shipping weight per package 10 ounces.
Package.....**79c**

Abrasive Discs for portable, bench-type sanders.

Diam.	Hole	Grit	Pkg.	Est. No.	Shpg. wt.	Price
Aluminum Oxide, paper backed						
4-in.	1/4-in.	Aust. *	6	9KT25051	3 oz.	49c
5-in.	None	Fine	6	9KT25052	3 oz.	49c
		M-Fine	6	9KT25053	3 oz.	49c
5-in.	1/4-in.	Coarse	3	9KT25054	4 oz.	49c
		Aust. **	6	9KT25055	4 oz.	49c
6-in.	1/4-in.	Fine	6	9KT25321	3 oz.	59c
		Med.	6	9KT25322	3 oz.	59c
		Coarse	4	9KT25323	7 oz.	59c
		Aust. *	6	9KT25324	6 oz.	59c
6-in.	1/2-in.	Fine	6	9KT25293	6 oz.	59c
		Med.	6	9KT25294	6 oz.	59c
		Coarse	6	9KT25295	7 oz.	79c
		Aust. *	6	9KT25296	6 oz.	59c
7-in.	1/4-in.	Aust. *	6	9KT2531	9 oz.	89c
8-in.	None	Fine	6	9KT25251	8 oz.	99c
		Coarse	6	9KT25252	8 oz.	99c
		Med.	3	9KT25253	10 oz.	99c
8-in.	3-in.	Aust. *	6	9KT22730	9 oz.	99c
9-in.	1/2-in.	Fine	6	9KT25261	8 oz.	\$1.19
		Med.	6	9KT25262	10 oz.	1.19
		Coarse	6	9KT25263	11 oz.	1.19
10-in.	None	Fine	6	9KT25341	11 oz.	1.49
		Med.	6	9KT25342	13 oz.	1.49
		Coarse	5	9KT25343	14 oz.	1.49
10-in.	3-in.	Aust. *	6	9KT22731	12 oz.	1.39
12-in.	None	Fine	3	9KT25481	7 oz.	99c
		Med.	3	9KT25482	7 oz.	99c
		Coarse	2	9KT25483	10 oz.	99c

Aluminum Oxide, fiber backed						
6-in.	1/4-in.	Fine	10	9KT25296	13 oz.	3.19
		Med.	10	9KT25297	14 oz.	3.49
		Coarse	10	9KT25298	1 lb. 1 oz.	3.79
		Aust. ***	10	9KT25481	1 lb. 1 oz.	3.79
7-in.	1/4-in.	Fine	10	9KT25291	1 lb. 2 oz.	3.39
		Med.	10	9KT25292	1 lb. 10 oz.	3.89
		Coarse	10	9KT25293	1 lb. 12 oz.	3.99
		Aust. ***	10	9KT25482	1 lb. 5 oz.	3.99

No-load (F. silicon car. M. C. alum. oxide)						
5-in.	1/4-in.	X-Fine	6	9KT76111	3 oz.	49c
		Fine	6	9KT76112	3 oz.	49c
		Med.	6	9KT76113	4 oz.	49c
		Coarse	6	9KT76114	4 oz.	49c

Silicon Carbide, open coat						
6-in.	1/4-in.	Coarse	3	9KT25374	6 oz.	79c

* 2F, 2M, 2C ** 3F, 3M *** 2F, 4M, 4C



Sander-Polisher Kit

1 CRAFTSMAN. Converts your electric drill into an effective sander and polisher. Sponge rubber backup pad with swivel joint helps prevent swirl marks. Kit also includes 3 sanding discs, lamb's wool polishing bonnet and tube of activator cement. Use with any 1/4 to 1/2-inch CRAFTSMAN or other drill. Discs are 5 inches in diameter.
9 KT 28476—Wt. 1 lb. 1 oz. Kit **\$3.09**

Replacement tube of Activator Cement. Use with kit (1) above.
9 KT 28473—Shpg. wt. 4 oz. **59c**

CRAFTSMAN Sanding-Polishing Kit for flexible shafts. For 1/4 to 1/2-inch CRAFTSMAN or other drills. With rubber pad, 1/2-inch chuck adapter, lamb's wool polishing bonnet.
With one 4-inch abrasive disc. 9 KT 2827—Shpg. wt. 9 oz. Kit **99c**

With three 5-inch abrasive discs. 9 KT 2841—Shpg. wt. 14 oz. Kit **\$1.49**

With three 6-inch abrasive discs. 9 KT 28416—Wt. 1 lb. 2 oz. Kit **1.99**

Sanding Wheels

Convert your bench saw or radial-arm saw to a disc sander. Replaceable abrasive disc.

2 8-inch diameter Wheel. Aluminum, 1 side tapered for fine jointing, 1 side flat. For 1/4 to 1/2-inch center hole. Med. grit, both sides.
9 KT 2274—Wt. 1 lb. 3 oz. **\$3.49**

10-inch diameter Wheel. Steel. For 1/4 to 1/2-inch center hole. Med. grit, one side, coarse on the other.
9 KT 22723—Wt. 3 lbs. 14 oz. **\$3.99**

Replacement Sanding Discs. For (2) above, 3-inch center hole. Package of six: 2 fine, 2 med. and 2 coarse discs.
8-inch diameter. 9 KT 22730—Wt. 9 oz. Pkg. **99c**

10-inch diameter. 9 KT 22731—Wt. 12 oz. Pkg. **\$1.39**

See page 96
for Sears Easy Terms

Sanding Helps

3 SEARS Sanding Block. 6-in. steel frame. With 30x1 1/2-in. roll... easily unrolls to replace worn parts.
9 KT 3681—Shpg. wt. 12 oz. **99c**

Refills for (3) above. 30x1 1/2-in. rolls. Shipping weight per roll 3 oz.

Garnet Refill..... Each **15c**
9KT36881—Fine 9KT36882—Medium
9KT36883—Coarse

Aluminum Oxide Refill..... Each **19c**
9KT36891—Fine 9KT36892—Medium
9KT36893—Coarse

4 Sanding Block. Manufactured silicone. Wears to shape, 9x2x1 in.
9 KT 6439—Shpg. wt. 6 oz. **29c**

5 CRAFTSMAN Steel Wool. All-purpose. Pkg. 16 pads. Wt. 1 lb. 3 oz.
9 KT 67910—Very fine #0000.....Pkg. **\$1.09**
9 KT 67911—Extra fine #000.....Pkg. **1.09**
9 KT 67912—Fine #0.....Pkg. **69c**
9 KT 67913—Medium #1.....Pkg. **69c**
9 KT 67914—Med. coarse #2.....Pkg. **69c**
9 KT 67915—Coarse #3.....Pkg. **69c**

Tungsten carbide Karbo-Grits

[6 thru 8] Outlast ordinary sandpaper 40 to 1. Grits are permanently brazed to steel wheels, discs or sheets... will last for years. When clogged, just shake out or withbrush or use gum and pitch remover.

6 Abrasive Wheel. For bench, radial-arm saws. For plywood, veneers. Coarse grit on one side and on edge; medium grit on the other side. Each has knockout-bushed round hole.
8-inch diameter, 1/4 to 1/2-inch hole. 9 KT 30001—Shpg. wt. 2 lbs. 10 oz. **\$4.99**

9-inch diameter, 1/2 to 1-inch hole. 9 KT 30002—Shpg. wt. 3 lbs. 2 oz. **5.99**

10-inch diameter, 3/4 to 1-inch hole. 9 KT 30003—Shpg. wt. 4 lbs. 2 oz. **8.49**

7 Sanding Discs. Bonded to thin steel. For electric drills, rotary sanders. Fit 1/4 or 1/2-in. arbors.

5-inch diameter. 6-inch diameter.
9 KT 30071—Fine 9 KT 30074—Fine
9 KT 30072—Medium 9 KT 30075—Medium
9 KT 30073—Coarse 9 KT 30076—Coarse
Wt. ea. 4 oz. Ea. **\$1.39** Wt. ea. 5 oz. Ea. **\$1.49**

8 Neoprene-backed Sheets. For plate sanders. Also for orbital, dual-action electric sanders. See page 53.

3 1/2 x 9 1/4-in. Sheets. 4 1/2 x 11 1/4-in. Sheets.
9 KT 30281—Fine 9 KT 30291—Fine
9 KT 30282—Medium 9 KT 30292—Medium
9 KT 30283—Coarse 9 KT 30293—Coarse
Wt. ea. 5 oz. Ea. **\$1.49** Wt. ea. 7 oz. Ea. **\$1.59**



Abrasive Wheels

Cut-off wheels below are NOT for bench or radial saws; do NOT cut wood

1 RESINOID-BONDED REINFORCED CUT-OFF WHEELS. Resist wobble, less danger of breaking. About 1/4-inch thick. Maximum RPM, 6000. Be sure tool is guarded. Choice of three types:

Shop Wheel for cutting steel . . 8-in. diameter, Aluminum oxide. Cuts steel bars, sheets, tubing. Hole bushed to fit 3/4-in. round arbors.
9 KT 6445—Ship. wt. 10 oz. . . . \$2.19

Porcelain and Tile Cutter . . 8-inch diameter, Silicon carbide. Also cuts marble, soapstone, plastics, copper, glass, cork. Center hole bushed to fit 3/4-inch and 1/2-inch round arbors.
9 KT 6446—Ship. wt. 10 oz. . . . \$2.19

Brick and Concrete Cutters, Silicon carbide. Also cut cast iron, brass, bronze, plaster, limestone, Transite, Masonite Preswood® and plastics. Excellent for tuck pointing.

8-inch diameter, Center hole bushed to fit 3/4-inch and 1/2-inch round arbors.
9 KT 6447—Ship. wt. 10 oz. . . . \$2.19

7-inch diameter, Fits Mall, Skill. Two center hole sizes.
Bushed for 3/4, 3/8-in. round arbors.
9 KT 6449—Ship. wt. 10 oz. . . . \$1.99

Fits arbors 13/16-inch square or diamond, 1-inch round arbors.
9 KT 6450—Ship. wt. 10 oz. . . . \$1.99

6-inch diameter, Choose from two center hole sizes. Ship. wt. 9 oz.
9 KT 6451—Fits 1/2-in. sq. or rd. \$1.69
9 KT 6452—Fits 3/8-in. round arbor 1.69

2 Rubber-bonded Cut-Off Wheel . . 8-inch diameter, Aluminum oxide. Cuts metal bars, tubing, etc. (not for glass and plastics). 3/32-in. thick. Max. RPM 6000. Use coolant. Center hole bushed to fit 3/4-in. and 1/2-in. round arbors.
9 KT 6470—Ship. wt. 1 lb. . . . \$1.19

3 CRAFTSMAN Rubber and Abrasive Polishing Wheel . . 4-inch diameter. Polishes, finishes all metals, plastics. For rust removal, die working, deburring, sharpening, etc. 3/4-in. thick. Max. RPM 3800. 1/4-in. center hole. Wt. each 10 oz.
9 KT 29281—Fine grit . . . \$1.49
9 KT 29282—Medium grit . . . 1.49

4 Resinoid Grinding Wheel, 7x3/4x3/4-inch. Fits 3/4x1/2-thread spindle. Aluminum oxide reinforced with tough fiber glass. Depressed center. For heavy-duty welding, grinding, sharpening and other portable grinding work. Use with 9 KT 1710 sanding guard (not included; see page 52).
9 KT 64101—Ship. wt. 1 lb. 1 oz. . . . \$2.79

Grinding Wheels for carbide-tip tools. Vitrified green silicon carbide. With 3/4-inch center hole. 3/4-inch thick. Bushings available for 3/4, 3/8 or 1/2-inch on request. State hole size wanted.

6-inch diameter.
9 KT 64240F—Fine
9 KT 64250F—Coarse
Shipping weight 3 pounds. . . . Each \$2.29

7-inch diameter.
9 KT 64241F—Fine
9 KT 64251F—Coarse
Shipping wt. 3 lbs. 3 oz. . . . Each \$2.69

6-inch Abrasive "Flap Wheel"

For use on grinder head, motor shaft, drill arbor, etc. Unique abrasive action polishes or grinds metals of all types, removes paint, rust; shapes wood. To grind, press object against wheel; to polish, lightly touch object against wheel. Made of 80-grit strips of cloth-backed aluminum oxide, anchored to steel flanges. 6-inch diameter, 1-inch wide. Has 3/4-inch arbor hole. Bushings included to reduce arbor hole to 3/8 or 1/2-inch.

9 KT 6409—Shipping weight 1 pound 2 ounces. . . . \$3.99



5 CRAFTSMAN Cement. Stays tacky. 8-oz. plastic bottle. Shipping weight 11 ounces.
9 KT 2220 Bottle 79c

6 Stick Disc Cement. Won't dry . . disc peels off after use. A mixture of rosin, animal, vegetable and mineral greases and waxes. A non-drying cement. 4 3/4-ounce tube. Shipping weight 6 ounces.
9 KT 2219 Tube 49c

7 Liquid Disc Cement. Designed for bonding abrasive discs to metal plates. Quick-setting. Completely soluble in water. 8-oz. bottle. Shipping weight 1 pound 2 ounces.
9 KT 2535 Bottle 59c

8 Sanding Drum. 3-inch face. 2 1/4-inch diam. Screws on 1/4-in. x 20-thread shaft. Medium grit sleeve over expanding rubber drum. Shipping weight 1 pound 3 ounces.
9 KT 2524 \$2.19

Sanding Sleeve. Use with (8) above.
9 KT 25221—Fine
9 KT 25222—Medium
9 KT 25223—Coarse
Shipping weight 2 ounces. . . . Each 29c

9 Sanding Drum. 1-in. face, 1 1/4-in. plain spindle, 1 1/4-in. long. Use with safe-lock or collet chuck. Abrasive sleeve over expanding rubber drum.
9 KT 2497—1 1/2-in. diam. Wt. 11 oz. . . \$1.49
9 KT 2498—2 1/4-in. diam. Wt. 13 oz. . . 1.69
9 KT 2499—3-in. diam. Wt. 1 lb. . . . 1.99

Sanding Sleeve. Use with (9) above. Package of 6.
1 1/2-inch diam. Wt. 3 oz. . . . Package 49c
9 KT 24421—Fine 9 KT 24422—Medium
9 KT 24423—Coarse
2 1/4-inch diam. Wt. 3 oz. . . . Package 59c
9 KT 24424—Fine 9 KT 24425—Medium
9 KT 24426—Coarse
3-inch diam. Wt. 3 oz. Package 69c
9 KT 24427—Fine 9 KT 24428—Medium
9 KT 24429—Coarse

10 Wire Cup Brushes. For cleaning and polishing; paint and burr removal. 1 1/4-in. diam.; 1/4-in. shank.
9 KT 64880—Fine wire. Wt. 4 oz. . . 99c
9 KT 64881—Coarse wire. Wt. 4 oz. . 89c

11 Carbon Removing Brush. Designed for removal of heavy carbon deposits . . also old paint and deep rust and corrosion. Especially suited for irregular surfaces. 1-inch diameter. 3/4-inch plain shank.
9 KT 6484—Shipping weight 6 oz. . . 99c

12 Wire Cup Brushes. Coarse wire for heavy-duty removal of rust and paint, cleaning pitted surfaces.
3/4-in. shank. 2 1/4-in. diam. From W. Germany.
9 KT 6496—Ship. wt. 8 oz. . . . \$1.19
3/4-inch center hole. 5-inch diam. From U.S.A.
9 KT 64105—Ship. wt. 2 lb. 10 oz. . . 4.99

13 Wire Wheel Brushes. Good for paint and burr removal, cleaning and polishing of lathed workpieces. 3-inch diameter. 1/4-inch spindle. Shipping weight 4 oz.
9 KT 64900—Fine wire 89c
9 KT 64901—Coarse wire 89c

14 Wire Scratch Wheels. Use on grinders, polishing heads, mandrels to remove rust and paint.

Catalog Number	Diam. (in.)	Width (in.)	Hole (in.)	Ship. wt. (lb. oz.)	Each
Fine					
9 KT 64820	4 1/2	1 1/2	1/2	5	99c
9 KT 64821	6 1/2	1 1/2	1/2	11	\$1.39
9 KT 64822	8 1/2	1 1/2	1/2	1	2.59
Coarse					
9 KT 64800	4 1/2	1 1/2	1/2	5	69c
9 KT 64801	6 1/2	1 1/2	1/2	11	\$1.09
9 KT 64802	8 1/2	1 1/2	1/2	1	1.99
Heavy Duty					
9 KT 64830	4 1/2	1 1/2	1/2	14	\$2.29
9 KT 64831	6 1/2	1 1/2	1/2	12	3.09
9 KT 64832	8 1/2	1 1/2	1/2	6	3.99

3 1/4-in. center hole bushed for 1/2-in.

CRAFTSMAN Grinding Wheels

REG. U.S. PAT. OFF.

Both sides and face precision-ground . . vitrified in electric kiln over 200 hours . . extra hard

You can be sure of top professional performance with these perfectly-balanced wheels. They cut cool and fast . . meet the highest industrial standards.

They're made of aluminum-oxide abrasive grains . . high in quality and long on wear. 3/4-inch center hole. Grinding wheels with diameter up to 8 inches and 3/4, 3/8, 1-inch thick have plastic bands to protect edges.

IMPORTANT SAFETY RULES:

(1) Do not grind on side of wheels. (2) Grinding wheels should be used only with concave flanges as large as, or larger than, shown in table below. (3) Use guard and shatterproof glass shield covering 3/4 of wheel. (4) For all wheels, never exceed RPM shown. (5) Wear safety goggles. (6) Stand aside one minute after starting wheel. (7) Follow safety instructions shown on grinding and cut-off wheels. Do not use on wood.

Wheel diameter, inches . . .	3	4	5	6	7	8
Flange diameter, inches . . .	1 5/8	1 3/4	1 5/8	2	2 1/2	3
RPM	8276	6207	4966	4138	3600	3600

SELECT THE CORRECT GRIT FOR THE JOB

Fine . . for knives, keen-edged tools, finish grinding and polishing.
Medium Fine . . for axes, woodcutting tools, preparation for finish.
Medium Coarse . . for machine shop use, or fast removal of stock.
3/4-inch center hole. Bushings furnished, on request, for 3/4, 3/8, or 1/2-inch diameter shaft. State size of bushings wanted.

Diameter and thickness	Min. size shaft	Ship. wt. (lb.)	Fine 100 grit		Medium Fine 60 grit		Medium coarse 36 grit	
			Cat. No.	Each	Cat. No.	Each	Cat. No.	Each
3x 3/4 in.	3/8 in.	1	9 KT 64311F	59c	9 KT 64201F	59c		
3x 3/4 in.	3/8 in.	1	9 KT 64312F	69c	9 KT 64202F	69c		
4x 1/2 in.	3/8 in.	1	9 KT 64313F	99c	9 KT 64203F	99c		
4x 1/2 in.	3/8 in.	2	9 KT 64314F	\$1.19	9 KT 64204F	\$1.19		
4x 1/2 in.	3/8 in.	2	9 KT 64315F	1.29	9 KT 64205F	1.29		
5x 1/2 in.	3/8 in.	2	9 KT 64316F	1.49	9 KT 64206F	1.49	9 KT 64230F	\$1.49
5x 1/2 in.	3/8 in.	3	9 KT 64317F	1.59	9 KT 64207F	1.59		
5x 1/2 in.	3/8 in.	3	9 KT 64318F	1.89	9 KT 64208F	1.89		
6x 3/4 in.	3/8 in.	3	9 KT 64319F	1.59	9 KT 64209F	1.59	9 KT 64231F	1.59
6x 3/4 in.	3/8 in.	3	9 KT 64321F	1.79	9 KT 64211F	1.79	9 KT 64232F	1.79
6x 3/4 in.	3/8 in.	4	9 KT 64322F	2.19	9 KT 64212F	2.19	9 KT 64233F	2.19
7x 3/4 in.	3/8 in.	4	9 KT 64323F	2.29	9 KT 64213F	2.29	9 KT 64234F	2.29
7x 3/4 in.	3/8 in.	5	9 KT 64324F	2.69	9 KT 64214F	2.69	9 KT 64235F	2.69
8x 1 in.	3/8 in.	6			9 KT 64215F	3.19	9 KT 64236F	3.19
8x 1 in.	3/8 in.	7			9 KT 64216F	3.59	9 KT 64237F	3.59

Rubber Wheels with slip-on grits

Safer than regular grinding wheels because rubber wheel never flies apart. Convenient too . . no need to remove the wheel for different jobs—just change abrasive band. 3 aluminum oxide slip-on bands included, (1 fine, 1 medium, 1 coarse). For 3450 RPM grinder.

6 x 1-inch wheel with 3/4-inch center hole, fits 3/4 or 1/2-inch shafts. Will fit motors and grinders with shafts of 1 1/4-inch length and over. Wheel plus 3 bands. Shipping wt. 2 lb. 4 oz.
9 KT 64045 Kit \$5.99


Replacement Abrasive Bands for above. Aluminum oxide. Cloth backing. 3 in pkg. 6x1 inch.
9 KT 22861—Fine
9 KT 22862—Medium
9 KT 22863—Coarse
9 KT 22852—One of each: fine, medium and coarse.
Shipping weight 5 oz. . . . Pkg. \$1.09

From W. Germany

CPM M AC25L3.0

SEARS 31

Every **CRAFTSMAN** Electric Grinder is fully enclosed to stay dust free.. each with precision ball-bearings

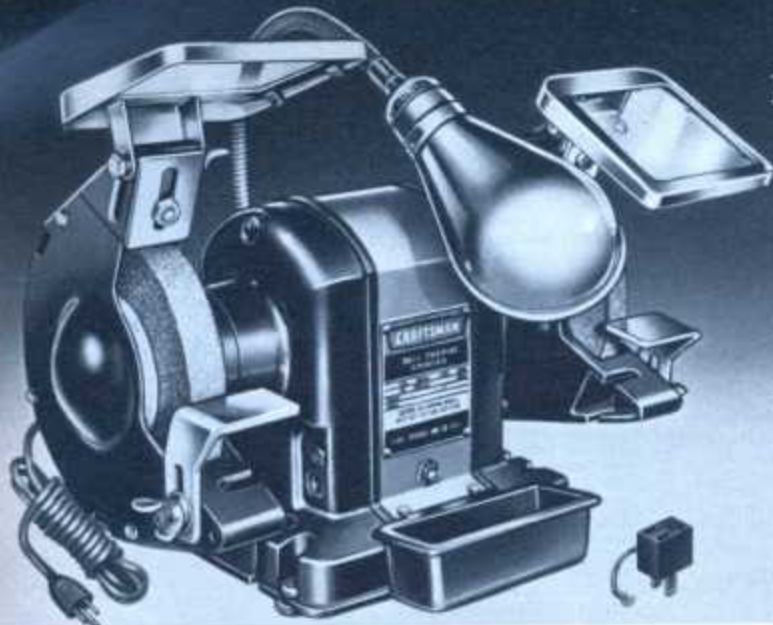

Electronic brake stops motor in seconds
Has 1/2-HP Motor . . two 6x3 1/4-inch wheels

\$57⁹⁹


CRAFTSMAN. 1/2-HP, split-phase motor, 3450 RPM. Electronic brake assures fast, positive stop control. Adjustable tool rests and eye shields.

Flexible 15-inch gooseneck lamp assembly. Removable water tray. 3-position toggle switch, 11 inches high x 16 1/4 inches long. 3/4x20-thread shaft. UL listed, (Industrial Standards). Includes 6-foot, 3-wire cord and adapter. For 110-120-volt, 60-cycle AC only. Guaranteed 1 year, see below.

99 KT 1941K—Shipping weight 30 pounds.....\$57.99

Grinder without electronic brake. 1/2 HP, split-phase motor. Two 6x3 1/4-inch grinding wheels. 110-120-volt, 60-cycle AC. 1-year guarantee below.

99 KT 1958K—Shipping weight 30 pounds.....\$49.99

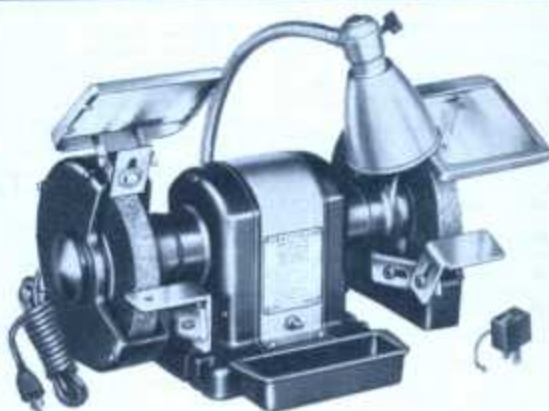

1/4-HP motor . . two 7x1-inch wheels

\$79⁹⁹

CRAFTSMAN. Capacitor-start, 3450-RPM motor, 1 fine, 1 medium-grit grinding wheels. 3/4-in. motor shaft has 3/4x20 thread. Cast aluminum housing is flat faced for clearance. . .robber mounted to cut vibration. Removable side guards, spark arrestors. Adjustable safety-glass eye shields. Gooseneck lamp. Toggle switch in base. 11 in. high; 18 3/4 in. long. 8-ft. 3-wire cord, adapter. For 110-120 or 230-volt, 60-cycle AC. UL listed, (Industrial Standards). Guaranteed 1 year, see below.

99 KT 1959K—Shipping weight 39 lbs. \$5 mo. Cash \$79.99

Has 1/4-HP Motor . . two 6x1 1/2-inch wheels

\$39⁹⁹



CRAFTSMAN. Split-phase 3450-RPM motor is fully enclosed. Adjustable tool rests and plastic eye shields. Removable guards.

Two 6x1 1/2-inch grinding wheels. 3/4-inch x 20-thread shaft. Toggle switch in base.

10 inches high, 15 1/4 inches long; base is 8 3/4 inches wide, 7 1/4 inches from front to back. Includes 6-foot, 3-wire cord, adapter. For 110-120-volt, 60-cycle AC only. UL listed, (Industrial Standards). See 1-year guarantee below.

Shipping weight 25 pounds.
99 KT 1940K.....\$39.99



Sears 5-inch
Electric
Grinder

\$15⁹⁹

Compact grinder designed for general home, shop use. Self-aligning bronze bearings. Shaded-pole motor. Two 5x3 1/2-inch thick grinding wheels. 6-foot 3-wire cord, adapter. Adjustable tool rests. Clear-plastic eye shields. Spark arresters; dust chutes. On-Off switch. 110-120-volt, 60-cycle AC. UL listed. 90-day guarantee.

9 KT 1964—Shipping weight 13 pounds.....\$15.99

GUARANTEE: We will repair, without charge, any electric grinder on these two pages showing any defects in materials or workmanship, if returned within time specified. This guarantee does not apply to tools used in rental service.

CRAFTSMAN Grinder Pedestal Stand

\$19⁹⁹



For 3/4, 1/2 and 1/4-HP grinders. 2 3/4-inch diameter post of tubular steel.

Over-all height is 32 1/4 inches. Cast iron base bolts to floor or stands without fastening (bolts not included).

Pre-bored mounting platform.

Shipping weight 34 pounds.

99 KT 2964K...\$19.99



Grinder Attachment holds tools

Simple to attach to grinder (see inset illustration). Holds work at pre-set angles. Makes hollow or conventional grinding easier. 4-inch travel with fine feed-in adjustment.

Sharpen blades, chisels, screwdrivers, etc. Guide for long knives, garden tools. Fits most grinders.

9 KT 19495—Shipping weight 4 pounds 15 ounces.....\$9.99



CRAFTSMAN Hand Grinder

\$5⁴⁹

High-speed gear ratio for easy turning. 60-grit vitrified, aluminum-oxide wheel is 5x1 inch. Ideal for most small jobs. Extra-long bearings. Machine-cut gears, pinions. Adjustable tool rest. Long clamp screw. Heavy-duty, cast-iron frame. Wheel bush to 3/4-inch arbor hole. Shpg. wt. 5 lbs. 6 oz.

9 KT 6426.....\$5.49



CRAFTSMAN Heavy-duty Commercial Grinder

- Built for continuous shop use
- Rugged 3/4-HP motor
- Large 8x1-inch wheels

\$99.99

The finest electric grinder we sell. Ideal for farms, service stations and continuous-production toolroom work. Totally enclosed, single-phase capacitor-start motor is induction run, 3450 RPM. Extra-heavy base and dynamically-balanced rotor cut vibration. Permanently-lubricated ball bearings. Removable wheel guards, individual wheel lights and safety-shields. 36 and 60-grit wheels. End shields. Adjustable tool rests. Spark arrestors. Dust exhaust outlets. 2-pole switch. 110-120-volt, 60-cycle AC. 3/4x18-thread shaft, 8-foot 3-wire cord and adapter. 11 3/4 inches high, 20 1/4 inches long. Base 7 3/4x9 1/2 inches. UL listed (Industrial Standards). Guaranteed one year (see details of guarantee on opposite page).

99 KT 1966N—Shipping weight 73 pounds, \$5 per month..... Cash \$99.99
99 KT 2960L—Pedestal for above grinder. Shipping weight 48 pounds..... 39.99



CRAFTSMAN Belt-driven Grinders

1 1/2-inch \$10.99
2 6-inch \$21.99

1 4-inch Grinder. Excellent for shop, industry or farm use.

Cast-iron housing with 8x3/4-inch steel spindle, reduced to 1/2-in. at ends. Has cast iron bearings against spindle. 1/2-in. x 20-thread shaft holds standard accessories. Adjustable tool rests. Spring-cap oil cups. Two 4x3/4-in. grinding wheels included (1 fine, 1 medium).

Use minimum of 1/2 HP, 1725 RPM motor with 2-inch motor pulley. (Motor and motor pulley not incl.) Shpg. wt. 7 lbs. 13 oz. 9 KT 6628..... \$10.99

2 6-inch. Grind large pieces because wheels extend in front of cast-iron housing. Permanently lubricated ball bearings. Removable guards; adjustable tool rests. Two 6x3/4-in. wheels incl. (1 coarse, 1 med.) 1 1/2x3/4-in. spindle reduced to 1/2-in. by 20-thread at ends; takes standard accessories. 2-in. machine pulley incl. Use minimum of 1/2-HP, 1725 RPM motor, 4-in. motor pulley (neither included).

99 KT 6604K—Wt. 23 lbs..... \$21.99

6-inch with Motor. 3/4 HP, 1725 RPM split-phase motor. 110-120v., 60 cycle, AC. 4-ft. cord. 4-in. motor pulley, V-belt. 99 KT 66047K3—Wt. 42 lbs..... \$38.99

CRAFTSMAN Polishing Heads

Polish, remove rust; not for grinding. Use 1/4 or 1/2-in. V-belt. 3/4x20-thread at ends; 1 3/4-in. flanges.

3 7 1/2 inches high. 3/4x7-inch spindle. Cast-iron bearings. Oil hole plugs. Without motor.

9 KT 6602—Wt. 4 lbs. 10 oz. \$4.99

4 7 3/4 inches high. 3/4x1 1/4-inch spindle reduced to 3/4x20-thread. Porous-bronze bearings; spring-cap oil cup. Without motor. 9 KT 6603—Wt. 8 lbs. 15 oz. \$7.99



5 Grinding-Wheel Dresser.

High carbon-steel cutters. Dresses, shapes, removes glaze from abrasive wheels. Overall length 12 inches. Shipping weight 2 lbs. 2 oz. 9 KT 6492..... \$1.79

Extra Cutters for above. Package of 4. Shpg. wt. 2 oz. 9 KT 6495..... Pkg. 19c

6 Silicon-carbide Grinding-Wheel Dresser.

For fast dressing, truing, shaping. 6-in. long black-silicon-carbide abrasive grit; self-removing protective shield. Over-all length 9 in. Wt. 14 oz. 9 KT 64921..... \$2.19

Shank-mounted Polishing Wheels. Fine quality, soft felt, 1 1/2-inch shank.

7 1 1/2x1-inch. Wt. 3 oz. 9 KT 64993..... \$1.09

8 1x2 inches. Shpg. wt. 3 oz. 9 KT 64992..... \$1.09

(9 and 10) Shank-mounted Buffs. Muslin. 1 1/2-in. shank. 50-lb. For polishing.

9 2-in. diameter. Wt. 3 oz. 9 KT 64981..... 69c

10 3-in. diameter. Wt. 5 oz. 9 KT 64982..... 79c

11 CRAFTSMAN Tampico-fiber Wheel Brush. Metal center. 6x1 1/2-in. 1 1/2-in. hole.

9 KT 6486—Wt. 11 oz. \$1.99

12 CRAFTSMAN Lamb's Wool Polishing Bonnets. Fit over sanding discs.

Catalog Number	Fit discs (inches)	Fiber (inches)	Shpg. wt.	Each
9KT2520	3 1/2 to 4	1	3 oz.	59c
9KT2521	4 to 5 1/2	1	3 oz.	89c
9KT2522	6 in.	1	4 oz.	\$1.19
9KT2528	7 in.	1 1/2	5 oz.	1.39
9KT2539	8 in.	1 1/2	7 oz.	1.79

13 CRAFTSMAN Buffing Set. 6-in. sewed muslin buffing wheel, 1 1/2-in. hole; 3-oz. bar red rouge; 3-oz. bar Tripoli (brown). 9 KT 2864—Wt. 1 lb. 2 oz. \$1.29

14 CRAFTSMAN Buffing Compound. Four 3-oz. bars; emery (black); Tripoli (brown); red rouge; white rouge. Shpg. wt. 1 lb. 8 oz.

9 KT 2896..... Package 99c

CRAFTSMAN Buffing Compound. For metals, plastics. 3-oz. bar. 9 KT 2865—Shpg. wt. 7 oz. 35c

White rouge Buffing Compound. 3-oz. bar. For stainless steel, alum., cast brass, chromium, etc. 9 KT 2860—Shpg. wt. 8 oz. 35c

15 CRAFTSMAN Buffing Wheels. High thread count. Raked edges. Double thickness. 1 1/2-in. hole. Muslin.

Catalog No. [Diam.] [Layers] Wt. [Each]

Spiral Sewed				
9 KT 64930	4-in.	30	3 oz.	59c
9 KT 64931	6-in.	30	6 oz.	89c
9 KT 64932	8-in.	30	8 oz.	\$1.29

Loose Concentrically Sewed				
9 KT 64940	4-in.	30	2 oz.	49c
9 KT 64941	6-in.	30	6 oz.	79c
9 KT 64942	8-in.	30	8 oz.	\$1.19

Industrial Goggles and Safety Glasses

16 Industrial Goggles. For chipping, grinding. Adjustable plastic frames. Hardened 50-mm lenses; protective side shields. Shipping weight 7 ounces.

9 KT 1860..... \$2.69

Industrial Goggles. As above, but designed to fit comfortably over regular glasses.

Shipping weight 9 ounces. 9 KT 18615..... \$3.39

17 Industrial Safety Glasses. Hardened clear lenses. 9 KT 1854—Wt. 5 oz. \$3.69

As above; with side shields. 9 KT 1855—Wt. 5 oz. \$4.19

18 Flexible Mask Goggles. For grinding, chipping, motor-cycling. .050-in. plastic lens. Perforated sides. 9 KT 1859—Wt. 7 oz. \$1.59

Face Shield \$3.49

19 Made with tough, flexible clear plastic window. Designed to cover and protect entire face. Sweatband included. 9 KT 1897—Wt. 1 lb. \$3.49


Extra Plastic Window for protective face shield (19), above Same high quality. 9 KT 1898—Wt. 8 oz. \$1.09



No Money Down on anything Sears sells

SEE PAGE 96

OPEN AREA Sears 33

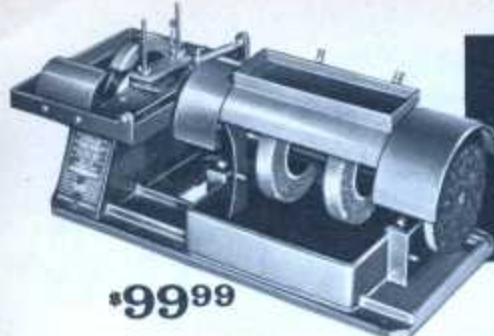

***99⁹⁹**

Cut, grind, polish; no wheel change

6-inch Lapidary Outfit. Precision built... permanently lubricated ball bearings. 9 1/4 x 10 1/4 inch table; coolant well in base. Rock vise handles up to 3 x 3-inch piece.

Body, base cast aluminum. 1-in. precision-ground shaft exceptionally accurate. 12x26x12 inches high. With 6-in. diamond blade. Two 6x1-inch grinding wheels, one 6-in. sanding-polishing plate, four 6-in. sanding discs, 3 dop sticks, cement; disc cement. Belt, pulleys, directions. Use 1/2-HP, 1725-RPM motor (not included).
99 KT 1420L—Shipping weight 45 lbs. ...\$99.99

Sears Lapidary (Gem-making) Outfits and Supplies



***63⁹⁹**

10-in. Trim Saw. Ball bearings. Belt, pulley, blade not incl. 12x18-in. table. Vision guard, self-feed weight, cable, vise. Use 1/4-HP, 1725-RPM motor (not incl.).
99 KT 1423K—Shipping weight 34 pounds. ...\$63.99

Grind and
polish stones
with these
rugged
tumblers



Low as
***35⁴⁹**
5 to 6 lb. capacity

Holds 5 to 6 lbs. Heavy-gauge welded steel with gray enamel finish. Extra-large nylon bearings for quiet operation, long life. Tough removable synthetic rubber liner. Neoprene gasket prevents leakage. Comes with fan-cooled enclosed-type motor (110-120-volt, 60-cycle AC). With belt, pulleys, 6-ft. cord and instructions. 8 1/2 in. wide, 10 in. deep, 14 1/2 inches high. Shpg. wt. 21 lbs.
99 KT 1414K—\$5.00 monthly.... Cash \$35.49



***234⁹⁵**
without stand

Deluxe 10-inch Outfit

Our finest! Multi-speed... saw and grinding units use separate motors. Permanently lubricated ball bearings, cast aluminum body and table. Includes: 10-inch diamond blade, two 8x1 1/4-inch grinding wheels, 8x1-inch hard-felt wheel, 8x3-inch cushioned drum sander, 8-inch lap and sanding disc, pulleys, belt, supplies kit. (Motors not included. Use 1/2-HP, 1725-RPM.) Stand 20x48x31 in. high.

Above item without stand. Shpg. wt. 160 lbs. Sent from factory near New York City... allow extra time for shipment.

F9 KT 14215N.....\$234.95

Above item with steel stand. Shipping weight 192 pounds.
99 KT 1421N3.....\$249.95



Low-priced Lapidary Outfits

Both outfits have these features: You can saw, grind, shape and polish by changing wheels. Cast aluminum alloy housing. Anti-splash rim. Self-lubricating bronze bearings. Movable lubrication cup.

Both include these wheels: super-charged diamond, silicon-carbide, grinding, cast-iron lap, wood lap, felt polishing and silicon-carbide scratch wheel. Also 4 oz. each No. 100 and No. 220 grinding compounds; 3 oz. polishing compound; 3 brushes; 6 dop sticks, cement; soluble oil, assorted semi-precious stones. Use 1/4-HP, 1725-RPM motor, 2-in. motor pulley, 23-48-in. V-belt (these three not incl.).

1 6-inch Outfit. All wheels 6 inches in diameter. Shipping weight 18 pounds.
99 KT 1400C.....\$42.99

2 10-in. Outfit. Cutting and lap wheels 10-inch; others 8-in. Weights control feeding.
99 KT 1401L—Wt. 41 lbs. \$79.99

Extra Silicon-Carbide Scratch Wheels for above two outfits.

9 KT 14060—6-in. Wt. 12 oz. 99c 9 KT 14061—8-in. Wt. 1 lb. 4 oz. \$1.59

Extra Polishing Wheels for the above two outfits. Constructed of felt on plywood discs.

9 KT 14100—6-in. Wt. 12 oz. \$1.89 9 KT 14101—8-in. Wt. 1 lb. 4 oz. \$2.49



***49⁹⁹**

3 Heavy-duty Tumbler. Efficient design... has fully-enclosed base. Motor can be mounted inside or outside of the tumbler's base.

Steel drum with rubber liner. 12-lb. capacity. Drum rotates on 2 steel shafts mounted in 4, self-aligning bronze bearings. Switch, belt and pulley. 15x12x11 inches.

Use 1/4-HP, 1725-RPM motor (not included).
99 KT 1412K—Shipping weight 22 pounds \$49.99

4 Extra-heavy-duty Tumbler. Our finest! Big and rugged—the kind used by professional lapidary artists. Rubber-lined steel drum has 25-pound capacity—over twice that of drum described above. Drum rotates on two 1/2-in. steel shafts mounted in 4 self-aligning bronze bearings.

Heavy-duty steel stand, belt and pulley. 26x13x12 inches high.

Use 1/2-HP, 1725-RPM motor. (Motor not included. See index of this catalog for motors.)
99 KT 1424L2—Shipping weight 68 lbs. \$86.99



***86⁹⁹**



5 Polishing Compounds. 1-lb. package. Shpg. wt. 1 lb. 5 oz.
9KT14030—Levigated Alumina. Pkg. \$1.19
9KT14031—Chrome Oxide... Pkg. 1.39
9KT14032—Airlfloat Tripoli... Pkg. .59c
9KT14033—Rouge... Pkg. .79c
9KT14034—Tin Oxide... Pkg. .279
9KT14035—Cerium Oxide... Pkg. .379

6 Rock-hard Felt Polishing Wheels. 1-in. center hole... bushing furnished for 1/4, 5/8, 3/4 or 1-in. if requested. State bushing wanted.

Cat. No.	Size, in.	Shpg. wt.	Each
9 KT 14102F	6x1	1 lb. 2 oz.	\$6.19
9 KT 14103F	8x1	2 lbs. 2 oz.	10.99
9 KT 14104F	8x1 1/2	2 lbs. 10 oz.	13.99
9 KT 14105F	10x1 1/2	4 lbs. 2 oz.	22.99

7 Soluble Oil. 1-pint can.
9 KT 1429—Vt. 1 lb. 12 oz. Can 79c

8 Supercharged Diamond Blades. More diamond chips for extra speed. 5-in. size has 1/2-in. bore; others, 5/8-in. bore bushed to 3/8 in.

Catalog Number	Diam. in.	Thick. in.	Shpg. wt. lbs. oz.	Each
9KT14184	5	.012	10	\$10.79
9KT14180	6	.032	14	12.99
9KT14181	8	.032	11	16.99
9KT14182	10	.032	14	20.49
9KT14183	12	.040	2	27.99

9 Dop Cement Kit. 5 oz. 6 sticks.
9 KT 1442—Wt. 10 oz. Kit \$1.29

10 19-piece Dop Set. Alcohol lamp, 4 pieces dipping wax, 12 hardwood dop sticks, 2 metal dops, instructions included.
9 KT 14421—Shpg. wt. 1 lb. Set \$2.79

11 Silicon Carbide Grinding Wheels. 1-in. hole or state bushing 1/4, 5/8, 3/4 or 1 in.

Cat. No.	Size	Grit	Shpg. wt.	Each
9 KT 64000F	6x1 in.	100	2 lbs. 11 oz.	\$3.79
9 KT 64001F	6x1 in.	220	2 lbs. 11 oz.	3.99
9 KT 64002F	8x1 in.	100	4 lbs. 10 oz.	4.79
9 KT 64003F	8x1 in.	220	4 lbs. 10 oz.	5.19
9 KT 64004F	8x1 1/2 in.	100	6 lbs. 10 oz.	6.49
9 KT 64005F	8x1 1/2 in.	220	6 lbs. 10 oz.	7.29
9 KT 64006F	10x1 1/2 in.	100	10 lbs.	9.99
9 KT 64007F	10x1 1/2 in.	220	10 lbs.	10.99

12 Silicon Carbide Grinding Compound. 5-lb. package. Shpg. wt. 5 lbs. 10 oz.

Cat. No.	Size	Each
9 KT 14411	60-grit	Pkg. \$3.79
9 KT 14412	80-grit	Pkg. 3.79
9 KT 14413	120-grit	Pkg. 3.79
9 KT 14414	220-grit	Pkg. 3.79
9 KT 14415	400-grit	Pkg. 5.19
9 KT 14416	600-grit	Pkg. 5.19

13 Set of 3 Templates and Aluminum Scriber. For marking rocks to guide cutting. 63 holes—shapes to match jewelry mountings. Made of tough, vinyl plastic. 6x9 1/2-inch size.

9 KT 14202—Shpg. wt. 5 oz. Set \$3.49

14 Rock Scoop. Tubular steel handle. Cast aluminum scoop. Has comfortable plastic grip. 36 inches.

99 KT 14242C—Shpg. wt. 2 lbs. \$3.59

15 Set of 2 Rock Pouches. Brown, heavy-canvas duck. Steel eyelets, draw cord. 13 1/2x18-in. pouch, one handle; 18 1/2x20-in. pouch, 2 handles.

9 KT 14246—Wt. 1 lb. 9 oz. Set \$5.99

16 Rock Pick. Forged steel handle, head. Rubber grip. 16-ounce size head.

9 KT 3819—Shpg. wt. 2 lbs. 1 oz. \$4.49



CRAFTSMAN precision-machined V-Pulleys

(1 thru 5) For motor pulley diameter—Multiply diameter of machine pulley by machine RPM wanted. Divide by motor RPM for motor pulley diameter. For machine pulley diameter—Multiply motor pulley diameter by motor RPM. Divide by machine RPM wanted.

Diameters in tables below are for outer edge of pulleys only.

1 Die-cast Single-groove V-Pulleys. Zinc alloy, aluminum finish. Socket-head setscrew. Fit $\frac{3}{8}$ (3L) or $\frac{1}{2}$ -inch (4L) V-belts, except 9KT 2800 which is for $\frac{3}{8}$ -inch (3L) belt only. $\frac{3}{8}$, $\frac{1}{2}$ -in. bores have standard keyway.

Catalog Number	Outside diam., in.	Bore size, inches	Weight lbs. oz.	Each
9 KT 2800	1 1/2	1/2	3	49c
9 KT 2801	2	1/2	5	59c
9 KT 2802	2 1/2	1/2	5	59c
9 KT 2802 1/2	2 1/2	1/2	7	69c
9 KT 2802 3/4	2 3/4	1/2	7	69c
9 KT 2803	3	1/2	7	79c
9 KT 2803 1/2	3 1/2	1/2	8	79c
9 KT 2803 3/4	3 3/4	1/2	8	79c
9 KT 2804	4	1/2	10	99c
9 KT 2804 1/2	4 1/2	1/2	10	99c
9 KT 2804 3/4	4 3/4	1/2	10	99c
9 KT 2805 1/2	5 1/2	1/2	12	1.19
9 KT 2805 3/4	5 3/4	1/2	12	1.19
9 KT 2806 1/2	6 1/2	1/2	15	1.39
9 KT 2806 3/4	6 3/4	1/2	1	1.39
9 KT 2806 1	6 1/2	1	1	1.39

*These pulleys are spoke type.

2 Cast-Iron Single-groove V-Pulleys. For $\frac{3}{8}$, $\frac{1}{2}$ -inch (3L-4L) section V-belts. No keyway in $\frac{1}{2}$ -inch bores; standard keyway in $\frac{3}{8}$ and $\frac{1}{2}$ -inch bores. 9 KT 2881 is hubless.

Catalog Number	Outside diam., in.	Bore size, inches	Weight lbs. oz.	Each
9 KT 2881	2	3/8	9	1.29
9 KT 2881 1/2	2 1/2	3/8	9	1.29
9 KT 2882	2 1/2	1/2	9	1.59
9 KT 2882 1/2	2 1/2	1/2	14	1.59
9 KT 2883	3	1/2	1	1.89
9 KT 2883 1/2	3 1/2	1/2	1	1.89
9 KT 2883 3/4	3 3/4	1/2	1	1.89
9 KT 2884	4	1/2	1	2.69
9 KT 2884 1/2	4 1/2	1/2	1	2.69
9 KT 2885	5	1/2	2	3.29
9 KT 2885 1/2	5 1/2	1/2	2	3.29
9 KT 2886	6	1/2	2	3.69
9 KT 2886 1/2	6 1/2	1/2	2	3.69

3 Hubless Single-groove V-pulleys. Zinc alloy, aluminum finish. Use side by side for multiple drives. Socket head setscrew. Fit $\frac{3}{8}$ (3L) or $\frac{1}{2}$ -inch (4L) V-belts. 2 1/2, 3-in. diam. pulleys in $\frac{3}{8}$, $\frac{1}{2}$ -in. bores have standard keyways.

Catalog Number	Outside diameter	Bore size	Shipping weight	Each
9 KT 2901 1/2	2 in.	3/8 in.	5 oz.	59c
9 KT 2901 3/4	2 1/2 in.	3/8 in.	5 oz.	59c
9 KT 2902 1/2	2 1/2 in.	1/2 in.	6 oz.	69c
9 KT 2902 3/4	2 3/4 in.	1/2 in.	6 oz.	69c
9 KT 2903 1/2	3 in.	1/2 in.	7 oz.	79c
9 KT 2903 3/4	3 1/2 in.	1/2 in.	8 oz.	79c
9 KT 2903 1	3 1/2 in.	1/2 in.	8 oz.	79c

4 Die-cast Cone V-Pulleys. Aluminum finish. 3 or 4 step. Socket-head setscrew. Fit $\frac{3}{8}$, $\frac{1}{2}$ -inch V-belts. $\frac{3}{8}$, $\frac{1}{2}$ -inch bores have standard keyway.

Catalog Number	Bore size/Step diameter, inches	Weight lbs. oz.	Each
9 KT 2788 1/2	1 1/2, 2 1/2, 2 1/2	1	1.39
9 KT 2788 3/4	1 3/4, 2 3/4, 2 3/4	1	1.39
9 KT 2788 1	2, 3, 3 1/4	1	1.39
9 KT 2792 1/2	1 1/2, 2 1/2, 2 1/2	1	1.69
9 KT 2792 3/4	1 3/4, 2 3/4, 2 3/4	1	1.69
9 KT 2792 1	2, 3, 3 1/4	1	1.69
9 KT 2793 1/2	1 1/2, 2 1/2, 2 1/2	1	1.99
9 KT 2793 3/4	1 3/4, 2 3/4, 2 3/4	1	1.99
9 KT 2793 1	2, 3, 3 1/4	1	1.99

5 Cast Iron 2-groove V-Pulleys. For $\frac{3}{8}$ or $\frac{1}{2}$ -inch (3L or 4L section) V-belts. Heavy duty. Precision machined and balanced to give correct belt seating. Precision-ground bores. Standard keyway. Treated to resist rust. Socket-head setscrew.

Catalog Number	Outside diam., in.	Bore size, inches	Weight lbs. oz.	Each
9 KT 2810 1/2	2	3/8	15	2.79
9 KT 2810 3/4	2 1/2	3/8	14	2.79
9 KT 2811 1/2	2 1/2	1/2	1	3.29
9 KT 2811 3/4	2 3/4	1/2	1	3.29
9 KT 2812 1/2	3	1/2	1	3.99
9 KT 2812 3/4	3 1/2	1/2	1	3.99

CRAFTSMAN sturdy V-Belts

Top quality. Length-coding assures perfect matching for multiple drives. Balanced to run true with minimum vibration. Tough, yet elastic for heavy shock loads. High-twist cover fabric, neoprene impregnated. Resists oils, heat, etc.

HOW TO MEASURE: Measuring width: Measure across broader (outside) surface of belt being replaced. (See sketch "A" at right.)

Measuring length: Measure around outside edge of first pulley, around it, then back to the starting point (not in groove). Use steel tape. (See sketch "B" at right.) Check Manufacturer's number on your old belt.



Catalog No.	Length	Mfr's. No.	Shpg. wt.	Each
3/8-inch . . . 3L-Section				
9 KT 1520	20 in.	3L200	3 oz.	79c
9 KT 1524	24 in.	3L240	3 oz.	79c
9 KT 1528	28 in.	3L280	4 oz.	79c
9 KT 1529	29 in.	3L290	4 oz.	79c
9 KT 1530	30 in.	3L300	4 oz.	79c
9 KT 1533	33 in.	3L330	4 oz.	79c
9 KT 1534	34 in.	3L340	4 oz.	79c
9 KT 1537	37 in.	3L370	4 oz.	89c

Catalog No.	Length	Mfr's. No.	Shpg. wt.	Each
1/2-inch . . . 4L-Section				
9 KT 1617	17 in.	4L170	4 oz.	89c
9 KT 1619	19 in.	4L190	4 oz.	89c
9 KT 1620	20 in.	4L200	4 oz.	89c
9 KT 1621	21 in.	4L210	4 oz.	89c
9 KT 1622	22 in.	4L220	4 oz.	89c
9 KT 1623	23 in.	4L230	4 oz.	89c
9 KT 1624	24 in.	4L240	4 oz.	89c
9 KT 1625	25 in.	4L250	4 oz.	89c
9 KT 1626	26 in.	4L260	5 oz.	89c
9 KT 1627	27 in.	4L270	5 oz.	89c
9 KT 1628	28 in.	4L280	5 oz.	89c
9 KT 1629	29 in.	4L290	5 oz.	89c
9 KT 1630	30 in.	4L300	5 oz.	89c
9 KT 1631	31 in.	4L310	5 oz.	89c
9 KT 1632	32 in.	4L320	5 oz.	89c
9 KT 1633	33 in.	4L330	5 oz.	89c
9 KT 1634	34 in.	4L340	5 oz.	89c
9 KT 1635	35 in.	4L350	5 oz.	89c
9 KT 1636	36 in.	4L360	5 oz.	99c
9 KT 1637	37 in.	4L370	5 oz.	99c
9 KT 1638	38 in.	4L380	6 oz.	99c
9 KT 1639	39 in.	4L390	6 oz.	99c
9 KT 1640	40 in.	4L400	6 oz.	99c
9 KT 1641	41 in.	4L410	6 oz.	1.09
9 KT 1642	42 in.	4L420	6 oz.	1.09
9 KT 1643	43 in.	4L430	6 oz.	1.09
9 KT 1644	44 in.	4L440	6 oz.	1.09
9 KT 1645	45 in.	4L450	6 oz.	1.09
9 KT 1646	46 in.	4L460	6 oz.	1.09
9 KT 1647	47 in.	4L470	6 oz.	1.09
9 KT 1648	48 in.	4L480	7 oz.	1.09
9 KT 1649	49 in.	4L490	7 oz.	1.09
9 KT 1650	50 in.	4L500	7 oz.	1.09
9 KT 1651	51 in.	4L510	7 oz.	1.19
9 KT 1652	52 in.	4L520	7 oz.	1.19
9 KT 1654	54 in.	4L540	7 oz.	1.19
9 KT 1656	56 in.	4L560	7 oz.	1.29
9 KT 1658	58 in.	4L580	7 oz.	1.29
9 KT 1660	60 in.	4L600	8 oz.	1.29
9 KT 1662	62 in.	4L620	8 oz.	1.29
9 KT 1664	64 in.	4L640	8 oz.	1.29
9 KT 1666	66 in.	4L660	8 oz.	1.29
9 KT 1668	68 in.	4L680	8 oz.	1.29
9 KT 1670	70 in.	4L700	8 oz.	1.39
9 KT 1672	72 in.	4L720	9 oz.	1.39

No Money Down on anything Sears sells

SEE PAGE 98



CRAFTSMAN professional-quality Mandrels

6 Double-end Bronze-bearing Mandrel. Use 2 attachments at same time. Right and left-hand thread ($\frac{1}{2} \times 20$) at spindle ends. Permanently lubricated bearings. $\frac{1}{2}$ -in. diam. steel spindle extends $1\frac{1}{4}$ in. 2-in. diam. pulley for $\frac{1}{2}$ -in. V-belt. 134-in. washers. Over-all size 9 3/4 in.

9 KT 4942—Shpg. wt. 3 lbs. 5 oz. . . . \$6.99

7 Single-end Bronze-bearing Mandrel. Steel shaft extends $1\frac{1}{4}$ in. at right-hand threaded end. Flat area at pulley end for set-screw. 134-in. washer. Permanently lubricated bearings. For $\frac{1}{2}$ -in. V-belt. $\frac{1}{2}$ -in. size has $\frac{1}{2}$ -in. shaft, 9 3/4 inches long; 2-in. diameter V-pulley. Arbor end threaded $\frac{1}{2} \times 20$ in. $\frac{1}{2}$ -in. size has $\frac{1}{2}$ -in. shaft, 11 1/4 in. long; 2 1/2-in. diameter V-pulley. Arbor end threaded $\frac{1}{2} \times 18$ in. thread.

9 KT 4940— $\frac{1}{2}$ -in. Wt. 2 lbs. 8 oz. . . . \$5.99

9 KT 4941— $\frac{1}{2}$ -in. Wt. 3 lbs. 5 oz. . . . 6.49

8 Single-end Ball-bearing Mandrel. 1-piece cast-iron housing prevents misalignment and twisting. Mounting brings shaft closer under top of table for deeper cut.


Precision ball bearings grease sealed. $\frac{1}{2}$ -inch steel shaft. Pulley end of shaft extends $1\frac{1}{4}$ inches; has flat area for pulley setscrew. Comes with right-hand thread only.

$\frac{1}{2}$ -inch size. Shaft 9 3/4 in. long. Arbor end threaded $\frac{1}{2} \times 20$, extends 1 1/4 in. Both flanges removable. Shipping weight 3 lbs. 8 oz.

9 KT 4953 \$8.49

$\frac{3}{4}$ -inch size. Shaft 11 1/4 in. long. Arbor end threaded $\frac{3}{4} \times 18$, extends 1 1/4 inches. One fixed flange. Shipping weight 4 lbs. 5 oz.

9 KT 4954 \$9.49

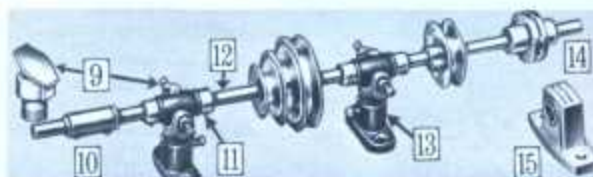

Line Shaft and Accessories

Mount shaft on bench or as overhead drive. Use $\frac{1}{2}$ -HP motor or larger.

Accessory	Catalog No.	Size	Shpg. wt.	Each
9 Cup Oiler				
9 KT 2820	3/8 in.	3 oz.	25c	
10 Rigid Couplings—connect sections				
9 KT 2839 1/2	1/2 in.	10 oz.	\$1.19	
9 KT 2839 3/4	3/4 in.	11 oz.	1.29	
9 KT 2839 1	1 in.	11 oz.	1.39	
11 Line Shaft Collars—prevent endwise drift				
9 KT 2824	1/2 in.	5 oz.	49c	
9 KT 2826	3/4 in.	6 oz.	49c	
9 KT 2825	1 in.	7 oz.	49c	
12 Steel Shafts*				
9 KT 2833	1/2 x 24 in.	1 lb. 15 oz.	89c	
9 KT 2834C	3/4 x 48 in.	3 lbs.	1.69	
9 KT 2830C	1 x 48 in.	5 lbs.	2.49	
9 KT 2835C	1 1/4 x 48 in.	7 lbs.	2.99	
13 Shaft Hangers†				
9 KT 2828	1/2 in.	1 lb. 7 oz.	2.99	
9 KT 2829	3/4 in.	1 lb. 15 oz.	2.99	
9 KT 2829	1 in.	1 lb. 12 oz.	3.29	
14 Flexible Couplings—connect motor to shaft				
9 KT 2840 1/2	1/2 in.	13 oz.	1.49	
9 KT 2840 3/4	3/4 in.	13 oz.	1.49	
9 KT 2840 1	1 in.	13 oz.	1.49	
15 Pillow Blocks				
9 KT 2750 1/2	1/2 in.	14 oz.	1.79	
9 KT 2750 3/4	3/4 in.	14 oz.	1.79	
9 KT 2750 1	1 in.	1 lb.	1.79	

*Use 1/2-inch for light tools, use 3/4 or 1-inch for heavier machinery, larger motors.

†Set 1/2-in. every 18 in. set 3/4 and 1 in. every 24 in.

CRPM ARD:LS

Sears 35



1 Low **\$29.99**

2 Low **\$17.99**

High-speed capacitor-starting

Low **\$29.99**

Rated for continuous duty. For power bench saws, jointer-planers, shapers, other hard-starting high-speed tools. 3450 RPM. Rigid base mounts in any position. Motor positions in cradle. Has knockout for BX or conduit connections. Quick voltage links for voltage changes in seconds. Mounting 3x4 3/4 in. NEMA 56 frames. Mylar® polyester insulated. Reversible rotation. Quick-connect terminals. Built-in ground lug meets local electric codes. Double-end shaft 1/2 (plus adapter) and 3/8 in. Single-phase 60-c. AC.

Catalog Number	HP	RPM	Volts	Shipping wt.	Each
99 KT 1218C	1/2	3450	110-120 or 230	20 pounds	\$33.99
99 KT 1219K	3/4	3450	110-120 or 230	24 pounds	40.99
99 KT 1220K	1	3450	110-120 or 230	26 pounds	45.99
99 KT 1221K	1 1/2	3450	110-120 or 230	27 pounds	64.99

With ball bearings, 4-foot, 3-wire electric cord, plug and adapter. Motors below all have manually reset overload protector and shaft cover.

With sleeve bearings, 4-foot cord. No overload protector or quick voltage links.

99 KT 1216C	1/2	3450	110-120	19 pounds	\$29.99
99 KT 1217K	1	3450	110-120	26 pounds	39.99
99 KT 1226K	3/4	3450	110-120	24 pounds	34.99



Variable speed motor

You can dial any full load speed between 500 and 5000 R.P.M. with this variable speed motor . . . And you get full torque at ALL speeds thanks to special silicon-controlled rectifier

\$79.99

This CRAFTSMAN 1/2-HP motor eliminates need for belt changes, step pulleys and costly speed control attachments. Makes it ideal for drill presses, wood lathes, band saws, belt and disc sanders, other bench tools requiring variable speeds. Single-phase universal type. 110-120-volt, 60-cycle AC. Mounts in any position. Manually reset overload protector. Single-end 3/8-in. diam. shaft 1/2-in. keyway. Mounting 3x4 3/4 inches. NEMA 56 frame, 4-foot 3-wire cord, adapter.

99 KT 2344K—Shipping weight 21 lbs. \$5 monthly. . . . Cash \$79.99



Blower and Fan Motors

Replace 1/2, 3/4, 1, 1 1/2-HP furnace, attic, window-blower motors. 1/2-HP split-phase, 110-120-v., 60-c. AC. Reversible. Mount in any position. Automatic reset overload protector. Single-end 1/2-in. flattened shaft, 3/8-in. adapter. Sleeve bearings. Through-bolts for direct drive fans. Flexible NEMA mounting—2 1/4x4 1/4 in. (48 frame); 3x4 3/4 in. (56 frame).

Single speed, 1725 RPM. 2 1/4x4 1/4-inch mounting.

99 KT 19835C—Shipping weight 18 lbs. . . . \$25.99

Single speed, 1725 RPM. 3x4 3/4-inch mounting.

99 KT 1983C—Shipping weight 20 lbs. . . . \$25.99

Two speed, 1140 or 1725 RPM. 3x4 3/4-in. mounting.

99 KT 1971K—Shipping weight 22 lbs. . . . \$31.99

Low **\$25.99**

General-purpose capacitor starting

1 Deliver extra torque for compressors, pumps, lathes, other hard-starting tools. 1725 RPM. Mount in any position. Reversible. Manually reset overload protectors (except 99 KT 1214K). Single-phase 60-c. AC. 99 KT 1970C has 3/2-in. diam. shaft with 3/8-in. adapter. 99 KT 1215K has 3/8-in. diam. shaft. 99 KT 1214K and 99 KT 1213K have 3/4 (plus adapter) and 3/8-in. diam. shafts. 56 frames. 3/4-in. keyway. 4-foot cord and plug included.

Catalog Number	HP	Type base	Bearings	Shaft end	Volts	Shpg. wt.	Each
99 KT 1214K	1/2	Resilient	Sleeve	Double	110-120	21 lbs.	\$32.99
99 KT 1213K	3/4	Rigid	Ball	Double	110-120 or 230	22 lbs.	39.99
99 KT 1215K	1	Rigid	Ball	Single	110-120 or 230	32 lbs.	59.99
99 KT 1970C	1 1/2	Resilient	Sleeve	Single	110-120 or 230	19 lbs.	30.99

*Use only these motors on compressors and pumps.

Split-phase . . for easy starts

2 Ideal for home, shop or farm use. Deliver all the power needed for small drill presses, lathes, jig saws, grinders, belt sanders, easy starting farm equipment and many other easy-start applications.

Bolts are extended through for end-bell mounting. Reversible rotation. 110-120-volt, 60-cycle single phase AC. 1725 RPM. Sleeve bearings. 3x4 3/4-inch resilient base mounting. Motor mounts in any position.

Mylar® polyester insulated. Without overload protector or on-off switch. With 4-foot, 3-wire electric cord, plug, adapter.

1/2-HP Motor. 1/2-inch shaft with 3/8-inch adapter.
99 KT 1210C—Shipping weight 16 pounds. . . . \$17.99

3/4-HP Motor. 3/4-inch shaft with 3/8-inch adapter.
99 KT 1211C—Shipping weight 18 pounds. . . . 20.99

1 1/2-HP Motor. 1 1/2 (plus adapter) and 3/8-inch double-end shaft.
99 KT 1212C—Shipping weight 19 pounds. . . . 23.99



Motor Accessories for bench power tools

3 Floating Motor Rails. For motors, 1 HP and less to be moved from one power tool to another. 2 1/2 to 5 inches between centers. Fasteners included.

Set of 1 rail and 2 clips.

9 KT 2265-Wt. 15 oz. . . . Set \$1.49

Package of 2 clips only.

9 KT 2268-Wt. 6 oz. . . . Pkg. 59c

4 Adjustable Motor Rails. For single tools only. Change belt tension by loosening bolts. For motors 1 HP and less. Maximum belt take-up has range of up to 2 1/2 in. Package of 2. Wt. 1 lb. 4 oz.

9 KT 2266. . . . Pkg. \$1.99

5 On-off Rocker Switch. Excellent for use on all Sears motors through 1 HP; universal motors to 1 1/2 HP. Especially recommended for use on bench power tools. Turns on a 3-prong receptacle. For 110-120-volt, 15 ampere AC. Complete with 8-foot cord.

9 KT 1208-Wt. 1 lb. 6 oz. . . . \$6.99

6 On-off Rocker Switch. Similar to switch above, but has two 3-prong receptacles—one controlled by switch; one always "on" for plugging in lamps, etc. For 110-120-volt, 15-amp. AC.

9 KT 1208S-Wt. 1 lb. 10 oz. \$8.99

No Money Down on anything Sears sells

SEE PAGE 96

standard mounts..will replace any make motor



1 Low **\$41.99**



2 Low **\$67.99**



3 Low **\$51.99**

HEAVY DUTY 1/3 to 7 1/2-HP Motors . . for compressors, pumps, sprayers, machine tools

CRAFTSMAN capacitor start . . induction run

(1 and 2) Big overload capacity. Ball bearings "take" greater thrust loads . . run quieter and longer . . sealed in grease so that no lubrication is needed. Manual-reset overload protector prevents burn-outs. Electrically reversible. Mounts in any position. No oil cups or drainage. Single-end shaft, 60-cycle, single-phase 110-120 or 230-volt AC. No switch or cord.

1 General purpose. For tough-starting loads on farm or in workshop—compressors, sprayers, grain handling augers. Rigid base. 56-frame. Totally enclosed and fan cooled.

Catalog Number	HP	RPM	Base mount	Keyed shaft	Shpg. wt.	Monthly	Cash
99 KT 1222K	1/2	1725	3x4 1/2 in.	3/8-in.	22 lbs.	\$5.00	\$41.99
99 KT 1223K	1/2	1725	3x4 1/2 in.	3/8-in.	26 lbs.	5.00	45.99
99 KT 1224K	3/4	1725	3x4 1/2 in.	3/8-in.	35 lbs.	5.00	54.99
99 KT 1225K	1	1725	3x4 1/2 in.	3/8-in.	40 lbs.	5.00	64.99

2 Heavy Duty. Ideal for farm applications: pumps, crop driers, ventilating fans, blowers, deep freezers, air compressors and grain conveyors—equipment requiring high starting torque. Open frame.

Catalog Number	HP	RPM	Frame size	Shaft diam.	Key width	Base mount	Shpg. wt.	Mo.	Cash
99 KT 12706L	1	1725	182	1 1/8 in.	1 1/8 in.	4 1/2 x 7 1/2 in.	63 lbs.	\$5.00	\$67.99
99 KT 12716N	1 1/2	1725	184	1 1/8 in.	1 1/8 in.	5 1/2 x 7 1/2 in.	74 lbs.	5.00	75.99
99 KT 12726N	2	1725	213	1 1/8 in.	1 1/8 in.	5 1/2 x 8 1/2 in.	92 lbs.	5.00	89.99
99 KT 12736N	3	1725	215	1 1/8 in.	1 1/8 in.	5 1/2 x 8 1/2 in.	109 lbs.	5.00	129.99

CRAFTSMAN repulsion start . . induction run

3 In rural areas, where the lines are long and the voltage low, repulsion start-induction run provides complete dependability. High torque and low starting current make this motor ideal for barn cleaners, silo unloaders, hay elevators, bunk feeders, heavy duty pumps, and other equipment which starts under heavy loads, even in extremely cold weather when current consumption on the lines is heavy which results in low voltage.

Permanently lubricated ball bearings. Reverse by shifting brushes. Mount in any position, 110-120 or 230-v., 60-c. single-phase AC (7 1/2 HP 230-v. only) open, ventilated frame, 1725 RPM. Single-end shaft.

Catalog Number	HP	Frame size	Shaft diam.	Key width	Base mount	Shpg. wt.	Mo.	Cash
99 KT 12301K	1/2	56	3/8 in.	3/8 in.	3 x 4 1/2 in.	40 lbs.	\$5.00	\$51.99
99 KT 12311K	3/4	56	3/8 in.	3/8 in.	3 x 4 1/2 in.	40 lbs.	5.00	62.99
99 KT 12321L	1	182	1 1/8 in.	1 1/8 in.	4 1/2 x 7 1/2 in.	64 lbs.	5.00	79.99
99 KT 12331N	1 1/2	184	1 1/8 in.	1 1/8 in.	5 1/2 x 7 1/2 in.	76 lbs.	5.50	102.99
99 KT 12341N	2	213	1 1/8 in.	1 1/8 in.	5 1/2 x 8 1/2 in.	95 lbs.	7.00	139.99
99 KT 12401N	3	215	1 1/8 in.	1 1/8 in.	5 1/2 x 8 1/2 in.	112 lbs.	9.00	174.99
99 KT 12411N	5	254U	1 1/2 in.	1 1/2 in.	8 1/4 x 10 in.	171 lbs.	11.50	244.99
99 KT 12421N	7 1/2	256U	1 1/2 in.	1 1/2 in.	10 x 10 in.	198 lbs.	14.50	299.99

CRAFTSMAN REG. U.S. PAT. OFF.

Heavy-duty 3-phase

3-HP **\$52.99**

For use on any single-phase application . . if 3-phase power is available . . more efficient



Lower power consumption, smoother operation, greater efficiency, higher overload factor on heavy load continuous duty applications than with single-phase motors. Can be used on any application recommended for single-phase motors provided three phase power is available. Low power consumption means simple, economical operation. Ball bearings sealed—require no lubrication. No moving parts except shaft assembly inside motor. No auxiliary parts or windings needed to start motor such as brushes, capacitors, etc. Withstands full voltage starts. Reversible rotation, 208-220/440-volts, 60 or 50-cycle AC, 1750/1450 RPM. Single-end shaft. Before ordering consult your local utility company to determine if 3-phase power (208-220/440 volts) is available.

Catalog Number	HP	Frame size	Shaft diam.	Key width	Base mount	Shpg. wt.	Mo.	Cash
99 KT 12871K	3/4	56A	3/8 in.	3/8 in.	3 x 4 1/2 in.	29 lbs.	\$3.00	\$52.99
99 KT 12881K	1	56A	3/8 in.	3/8 in.	3 x 4 1/2 in.	37 lbs.	5.00	57.99
99 KT 12891L	1 1/2	182	1 1/8 in.	1 1/8 in.	4 1/2 x 7 1/2 in.	55 lbs.	5.00	63.99
99 KT 12901L	2	184	1 1/8 in.	1 1/8 in.	5 1/2 x 7 1/2 in.	60 lbs.	5.00	68.99
99 KT 12911L	3	213	1 1/8 in.	1 1/8 in.	5 1/2 x 8 1/2 in.	63 lbs.	5.00	74.99
99 KT 12921N	3	213	1 1/8 in.	1 1/8 in.	5 1/2 x 8 1/2 in.	83 lbs.	5.00	84.99
99 KT 12801N	5	215	1 1/8 in.	1 1/8 in.	5 1/2 x 8 1/2 in.	104 lbs.	5.00	94.99
99 KT 12811N	7 1/2	254U	1 1/2 in.	1 1/2 in.	8 1/4 x 10 in.	165 lbs.	6.50	129.99

MOTOR GUARANTEE

We will repair at no charge, any Sears Electric Motor proving defective in materials or workmanship, if returned within one year from date of purchase.

MOTOR BOOK

Included with each Sears motor. Gives valuable information on motor installation, applications and maintenance.

CRAFTSMAN REG. U.S. PAT. OFF.

Flexible Shafts, Accessories

4 72-inch Shaft. Extra long . . heavy duty. 3/4-inch wire core. Spiral-steel liner has oil-resistant fabric jacket; reinforced synthetic-rubber cover. Chrome-plated steel motor coupling and knurled handpiece. Extra-large ball bearings. 1/2-inch x 20-thread spindle. Fits any 3/4 or 1-inch motor shaft, 1-HP capacity. Operates at 1750 or 3450 RPM.

99 KT 2655L—Shipping weight 12 pounds. . . \$39.99

5 50-inch Shaft. General purpose. 3/4-inch core. Ball-bearing aluminum-alloy handpiece and coupling. Steel end fittings. 1/2-inch x 20-thread spindle. Fits any 3/4 or 1-inch motor shaft. 3/4-HP capacity. Operates at 1750 or 3450 RPM.

99 KT 2633—Shipping weight 6 pounds. . . \$16.99

38 18-inch Extension for above.

99 KT 2634—Shipping weight 3 lbs. 2 oz. . . 6.49

(6 and 7) Wheel Guards. Hand grip. For 4-in. wheels.

6 Fits 99 KT 2633 above.

99 KT 2637—Shipping weight 1 lb. 3 oz. . . \$4.49

7 Fits 99 KT 2655L above.

99 KT 2638—Shipping weight 1 lb. 3 oz. . . 4.49

CRAFTSMAN Power Router Kit \$52.99

Motor develops $\frac{3}{4}$ HP. Perfect for do-it-yourself projects. 100% ball bearings. 25,000 RPM. Cuts up to $1\frac{1}{4}$ in. deep, graduated in 32nds in. Toggle switch. Collet-type chuck grips $\frac{1}{4}$ -in. shank bits. Includes edge guide, trammel point and steel carrying case shown at left. 10-ft. 3-wire cord and adapter. 110-120-volt, 25-60-cycle AC-DC. UL listed. Router guaranteed one year (see below).

Shipping weight 18 pounds.
99 KT 25065C—\$5 monthly.....Cash \$52.99

Router only. Shpg. wt. 7 lbs. 5 oz.
9 KT 2506—\$3 monthly.....Cash 39.99



\$72.99

CRAFTSMAN Deluxe Power Router Kit

REG. U.S. PAT. OFF.

- Develops a full 1 HP • Convenient automatic work light
- Micrometer-type depth gauge adjusts in 64ths of an inch
- Contoured handles—one with trigger-switch for easy control

Kit consists of (1), (2) and (3) plus trammel point for cutting circles. Ideal for tradesmen, cabinet shop and home craftsmen. Combine with bits and accessories at right to rout, groove, mortise... make up to 33 different joints—including dovetail and tenon... trim, cut and bevel plastic laminates... do many jobs practically impossible to do by hand.

100% ball bearings. 25,000 RPM. Cuts up to $1\frac{1}{4}$ in. deep. Chip-deflector eye shield of clear plastic. Built-in spindle lock for faster bit changing. Collet-type chuck. Combination wrench and screwdriver. 10-ft. 3-wire cord, adapter. 110-120-v., 25-60-c. AC-DC. UL listed. Guaranteed 1 year (see below).

99 KT 25075C—Shipping weight 20 pounds. \$5 monthly.....Cash \$72.99

1 Router only, Wt. 7 lbs. 15 oz.
9 KT 2507—\$5 monthly.....Cash \$59.99

2 Steel Carrying Case for routers on this page.
9 KT 1470—Shpg. wt. 8 lbs.....\$5.99

Trammel Point Attachment (not shown).
9 KT 25164—Shpg. wt. 1 lb. 8 oz.....\$3.99

3 Adjustable Edge Guide.
9 KT 25163—Wt. 1 lb. 14 oz. \$4.99

Template Guide Bushings (not shown). Includes adapter and three bushings. For use with dovetail template 9 KT 2573 and hinge template 99 KT 2574L listed at right.
9 KT 25059—Shpg. wt. 15 oz.....\$4.99



Power Router Bits and Accessories

4 4-piece Router Bit Set. Also for drill presses, radial arm saws. $\frac{1}{4}$ -in. diam. shank. 1 each: $\frac{1}{4}$, $\frac{1}{8}$, $\frac{1}{16}$, $\frac{1}{32}$ -in. straight-face bits. $\frac{1}{16}$ -in. veining bit. $\frac{1}{16}$ -in. bit for V-grooving or chamfering. Fits CRAFTSMAN, Stanley, Porter-Cable, other power routers.
9 KT 2551—Shipping wt. 7 oz.....\$12.99

(5 thru 7) 1-piece Kromedge Router Bits. $\frac{1}{4}$ -inch diameter shank fits any router, drill press or radial arm saw. High speed alloy steel or carbide-tipped cutting edges. Kromedge bits last longer, stay sharper.

5 Straight-face Router Bits, Wt. 3 oz.
9 KT 2552— $\frac{1}{4}$ inch.....\$1.49
9 KT 25521— $\frac{1}{8}$ inch.....1.49
9 KT 25522— $\frac{1}{16}$ inch.....1.99
9 KT 25523— $\frac{1}{32}$ inch.....2.59

Carbide-tip Straight-face Router Bits.
9 KT 25524— $\frac{1}{4}$ inch. Wt. 3 oz.....\$3.99
9 KT 25525— $\frac{1}{8}$ inch. Wt. 3 oz.....4.49
9 KT 25526— $\frac{1}{16}$ inch. Wt. 3 oz.....4.99
9 KT 25527— $\frac{1}{32}$ inch. Wt. 4 oz.....5.99

Shank-flute Bit, $\frac{1}{4}$ inch.
9 KT 2518—Shpg. wt. 3 oz.....3.49

6 V-groove, Chamfering Bit, $\frac{1}{4}$ inch.
9 KT 2557—Shpg. wt. 3 oz.....\$3.79

Veining Bits, Shpg. wt. 2 oz.
9 KT 2559— $\frac{1}{4}$ inch.....1.69
9 KT 25592— $\frac{1}{8}$ inch.....1.89
9 KT 25593— $\frac{1}{16}$ inch.....1.99

7 Dovetail Cutter Bits, Wt. 3 oz.

9 KT 2553— $\frac{1}{4}$ inch.....2.99
9 KT 25531— $\frac{1}{8}$ inch.....3.99

8 Arbor, $\frac{1}{4}$ in. x 28 thread. Use with bits (9). Two pilots included.
9 KT 2589—Shpg. wt. 3 oz.....\$1.99

9 Arbor-type Cove and Bead Bits. $\frac{1}{2}$ -inch Bead Bit. Use with (8).

9 KT 25561—Shpg. wt. 3 oz.....\$3.79

$\frac{1}{2}$ -inch Cove Bit. Use with (8).
9 KT 25571—Shpg. wt. 3 oz.....3.79

$\frac{3}{8}$ -inch Bead Bit. Use with (8).
9 KT 25562—Shpg. wt. 3 oz.....3.49

$\frac{3}{8}$ -inch Cove Bit. Use with (8).
9 KT 25572—Shpg. wt. 3 oz.....3.49

10 $\frac{1}{2}$ -in. Dovetail Template. Exact spacing, depth adjustment for flush or rabbeted dovetail joints. For stock to 12 in. wide, $\frac{1}{8}$ to $1\frac{1}{2}$ in. thick. Channel plate, plastic comb, clamps. No bit, bushings.
9 KT 2572—Wt. 8 lbs. 11 oz.....\$19.99

11 Laminated-plastic Trimmer Attachment. Trims, bevels Formica®, laminated plastic table tops, counters. Adjusts. Carbide-tipped bit. Fits routers on this page.
9 KT 25731—Shpg. wt. 9 oz.....\$4.99

Carbide-tipped combination straight and bevel Cutter Bit. For Formica®, laminated plastic.
9 KT 2541—Shpg. wt. 3 oz.....\$2.99

12 Sharpening Kit. Grinding wheel fits routers on this page. Adjustable fixture for $\frac{1}{4}$ -in. shank bits.
9 KT 25169—Wt. 3 lbs. 7 oz.....\$12.99

13 3-section Butt Hinge Template. Use with bushings at left. Contractor type. For square or round cornered hinges up to 5 in. long. Mortise 2 or 3-hinge doors up to 8 ft. high. $\frac{1}{4}$ to $2\frac{1}{2}$ in. thick.
99 KT 2574L—Shpg. wt. 13 lbs. \$26.99

CRAFTSMAN Commercial Power Planer

REG. U.S. PAT. OFF.

Exceptionally easy to handle because it's so compact (9 $\frac{1}{4}$ in. long; 3 $\frac{1}{4}$ in. wide) and lightweight (only 5 $\frac{1}{4}$ lbs.). Helps take the hard work out of planing, sizing or beveling doors, windows and shutters. Excellent for use by tradesmen and in cabinet shops, home workshops.

100% ball bearings. Motor develops $\frac{3}{4}$ HP. Cutter operates at 25,000 RPM. Planes off a path $1\frac{1}{4}$ in. wide, $\frac{1}{4}$ in. deep. Two fences: 90° for square cuts; 95° for beveling. Slide switch. Satin-finish aluminum alloy housing.

Comes with 10-ft. 3-wire cord, adapter. 110-120-v., 25-60-c. AC-DC. UL listed (Industrial Standards). Guaranteed one year (see below).
9 KT 2502—Wt. 7 lbs. 1 oz. \$5 mo. Cash \$35.99

Replacement Blade for above.
9 KT 25006—Shipping weight 5 ounces...\$6.49

Cutter Sharpener Kit. Use planer motor to re-sharpen cutter blade. Instructions included.
9 KT 25007—Shipping weight 13 ounces...\$7.29

PORTABLE ELECTRIC TOOL GUARANTEE

We guarantee all Sears portable electric tools against defects in materials or workmanship as follows: when the tool has been properly used, cared for and maintained, we will repair or replace at our option and install, within the time specified from date of sale any part which proves, upon our examination, to be defective under normal use.

This guarantee does not cover: burn-outs due to low or improper voltage or from the tool being forced or otherwise improperly used; blades, cords or any other parts subjected to abuse; or tools used in rental service.



\$35.99



CRAFTSMAN
REG. U.S. PAT. OFF.

Electric Rotary Grinder

Carve, sand, engrave, polish... file
cut, drill in metal, plastic
wood or glass



\$39.99

Ideal for use in tool and die work, or precision model and home craft projects. Motor develops $\frac{1}{2}$ HP. 24,000 RPM. 100% ball bearing construction. Collet chuck grips $\frac{1}{8}$ and $\frac{1}{4}$ -in. shank bits. Hang-up bail. 10 in. long. 10-ft. 3-wire cord, adapter. 110-120-volt, 25-60-cycle AC-DC. UL listed (Industrial Standards). Guaranteed one year (see facing page). 9 KT 2584—Wt. 4 lbs. 13 oz. \$5 mo... Cash \$39.99

1 Stand, Holder for above. Mount on bench or use as tool post holder on lathe except 6-in. size. 9 KT 25846—Shipping weight 4 lbs. 9 oz... \$7.99

2 Fitted Steel Carrying Case. For grinder above and up to fifty accessories. 16x4x10 in. wide. 9 KT 1465—Shipping weight 5 lbs. 5 oz... \$6.19

Li'l Crafty Rotary Electric Tool Kit

Grinds, carves, engraves, saws, files, drills, polishes, sharpens, sands, buffs... can be used in wood, plastic or non-ferrous metals

\$24.99

Here's a high-speed rotary tool specially designed for model and hobby craft work... has many other applications, too. Takes accessories with shafts up to $\frac{1}{4}$ in. Shaped so fingers rest in natural position for a firm, sure grip... helps prevent sliding. 8 inches long. Has convenient hanging bail at rear. Lightweight, yet sturdy housing of aluminum alloy with attractive 2-tone enamel finish.

With 26 accessories including cutters, saws, brushes, polishing wheels, grinding wheels, buffs and extra mandrels. 6-ft. 3-wire cord and adapter. Comes in molded plastic case that's custom fitted to tool with individual bins for accessories. 110-120-volt, 60-cycle AC. Guaranteed 90 days (see facing page). 9 KT 25151—Ship. wt. 3 lbs. 8 oz... \$24.99

(3 thru 8) Individual CRAFTSMAN Cutters. High speed steel. Type M-2. For wood, plastic, metal (except hardened steel). $\frac{1}{4}$ -in. shanks. Meet Fed. Specs. GGG-F-00340. Ship. wt. ea. 3 oz.

Cat. No.	Diam.	Shape	Price
9 KT 2966	$\frac{1}{8}$ in.	Cylindrical	\$1.49
9 KT 2967	$\frac{1}{8}$ in.	Spherical	1.49
9 KT 2970	$\frac{1}{8}$ in.	Tree-pointed	1.89
9 KT 2968	$\frac{1}{8}$ in.	Elliptical	1.89
9 KT 2971	$\frac{1}{8}$ in.	Conical	1.49
9 KT 2969	$\frac{1}{8}$ in.	Tree-radius	1.49

CRAFTSMAN 6-piece Rotary Cutter Set. One each sizes (3) to (8) above. 9 KT 2965—Ship. wt. 6 oz... Set \$7.99

(9 thru 11) Rotary Cutters. $\frac{1}{4}$ -in. shanks. For wood, plastic.
(9) 9KT64771-Rmp* 9KT64782-Filet
(10) 9KT64773-Rmp* 9KT64783-Filet
(11) 9KT64772-Rmp* 9KT64782-Filet
Shipping weight 5 ounces... Each 79¢
*From W. Germany

(12 thru 20) Individual Mounted Grinding Points. Vittrified aluminum oxide on 1x $\frac{1}{4}$ -in. steel shafts. For use in finishing and die cutting. Sizes shown are stone sizes. Ship. wt. each 4 oz.


Set of 9 Mounted Grinding Points. One each of points (13), (14), (15), (16), (18) and (19) above plus 1x $\frac{1}{4}$ -in. point similar to (12), 1x $\frac{1}{2}$ -in. point similar to (20) and 1-inch diameter spherical point (not shown). 9 KT 6414—Wt. 10 oz... Set \$3.49

(21 thru 26) Individual Solid Carbide Burrs. $\frac{1}{4}$ -inch shanks.

(21) 9 KT 25641—Cylindrical (24) 9 KT 25644—Cylindrical radius
(22) 9 KT 25642—Tree-shape (25) 9 KT 25645—Ball-shape
(23) 9 KT 25643—Conical (26) 9 KT 25646—Tree radius
Shipping weight 2 ounces... Each \$2.99

No Money Down on anything Sears sells

SEE PAGE 96

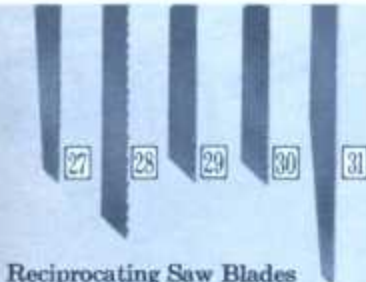

Reciprocating Saw Blades

(27 thru 31) Teeth are ground after special heat treatment of blades to give toughness. (27), (28) and (31) are high-carbon steel, (29) and (30) are high-speed steel. Fit CRAFTSMAN, other makes including Skill, Stanley, Shopmate, Penncraft, Power-Kraft, Milwaukee.

27 6 in. long; 8 teeth per in. For fast, smooth cuts in wood, plastic, composition board and hardboard. Keyhole tip permits intricate scroll cuts. 9 KT 28681—Wt. 3 oz. 39¢

28 9 in. long; 3 teeth per in. For fast, rough cuts in green and fibrous woods over 1 in. thick. Good for rough-in work. 9 KT 28682—Wt. 4 oz. 59¢

31 12 in. long; 8 teeth per in. For fast, smooth, deep cuts through thick wood, plastic, composition board, hardboard. Keyhole tip for scroll cuts. 9 KT 28683—Shipping weight 4 ounces... \$1.09

29 6 in. long; 24 teeth per in. For cutting steel and other metals up to $\frac{1}{4}$ in. thick. Especially suited for cutting pipes or tubing, angle iron. 9 KT 28683—Wt. 3 oz. 69¢

30 6 in. long; 7 teeth per in. Designed for cutting flush to wall or floor through wood, plastic, nails and soft metal. 9 KT 28684—Wt. 3 oz. 69¢

CRAFTSMAN Reciprocating Saw

... tops for cutting versatility

Handles any job from 12-in. diameter logs to steel pipe or bar stock... wood or plastic... even the thinnest plastic sheets. Makes tough rip cuts... even does highly intricate scroll work

\$43.99

Perfect for tradesmen or homeowners. 1 $\frac{1}{2}$ -inch stroke for fast cutting. Locking chuck takes blades up to 12 in. long with $\frac{1}{4}$ -in. shanks. Motor develops $\frac{1}{2}$ HP. 100% ball-bearing drive. No-load speed 2200 strokes per minute. Precision helical steel gears. Brushes externally accessible for easy replacement.

In-line counterbalance mechanism cuts vibration for smoother action... helps reduce fatigue. Flush cuts along floor or wall without attachment. 4-position, flip-flop base shoe lets you position saw to work as required... extends blade life. Heavy-duty, 3-position auxiliary handle. Sawsdust blower keeps cutting line clean, easy to follow.



Sectional polished aluminum housing. Trigger lock switch, safety release. With wrench and 3 blades for wood and metal. 10-ft. 3-wire cord, adapter. 110-120-volt, 25-60-cycle AC. UL listed (Industrial Standards). Guaranteed one year (see facing page). 9 KT 2784—Wt. 9 lbs. 14 oz. \$5 mo... Cash \$43.99

Steel Carrying Case for saw above (not shown). Charcoal gray baked enamel finish. Convenient handle. Clips for storing cord under cover. 9 KT 1460—Shipping weight 8 lbs. 14 oz... \$5.99

CRAFTSMAN 3/8-inch Drill..

Many more uses than 1/2-inch drills because you get extra power at lower speed. Bits last much longer...even drill masonry



\$24⁹⁹ without bit



\$11⁹⁹ without bit

\$19⁹⁹ without bit

Economy 1/4-inch Drill

Motor develops 1/4 HP. Not CRAFTSMAN. Designed for light-duty operation and occasional building or repair projects. Sleeve bearings. Painted die-cast aluminum housing. Locking trigger switch with safety release.

Double reduction gears. Geared chuck with key. No-load speed 1000 RPM. 9 inches long. 6-foot, 3-wire cord and adapter are included. Operates on 110-120-volt, 60-cycle AC. UL listed. Guaranteed for 90 days (see Portable Electric Tool guarantee on page 38).

9 KT 1108—Shipping weight 4 pounds.....\$11.99

CRAFTSMAN Medium-duty 1/4-inch Drill

Motor develops 1/4 HP. Oil-impregnated bronze sleeve bearings for long life. Rigid sectional housing of polished aluminum alloy. Locking trigger switch for continuous running; safety release. Double reduction gears.

Spindle lock for quick chuck removal. No-load speed 1200 RPM. Operates on 110-120-volt, 60-cycle AC. 10-foot, 3-wire cord and adapter are included. UL listed (Industrial Standards). 8 1/2 in. long. Guaranteed for one year (see Portable Electric Tool guarantee on page 38).

9 KT 1112—Shipping weight 4 lbs. 8 oz.....\$19.99

Motor develops 1/4 HP...ball bearings at heavy load points for long wear. Extra rugged for the big jobs. Polished aluminum alloy housing...sectional-type for extra strength. Spindle lock for fast chuck removal. Precision helical gears for long life.

Locking trigger switch with safety release. Double reduction gears for added torque. Geared chuck with key. No-load speed 1150 RPM. 10-ft. 3-wire cord, adapter. 8 1/2 inches long. 110-120-volt, 60-cycle AC. UL listed (Industrial Standards). Guaranteed one year (see page 38).

Shipping wt. 4 lbs. 8 oz.
9 KT 775.....\$24.99

1/4-inch Electric Drills



\$8⁹⁹ without bit

\$14⁹⁹ without bit

\$19⁹⁹ without bit

Economy

Motor develops 1/4 HP. Not CRAFTSMAN. For household and light-duty jobs. Excellent for working in tight, hard-to-reach places. Sleeve bearings. Sectional aluminum alloy housing; enamel finish. Locking trigger switch; safety release. Single reduction gears. Key chuck. No-load speed 2250 RPM.

6-foot, 3-wire cord and adapter are included. 7 3/4 inches long. Operates on 110-120-volt, 60-cycle AC. UL listed. Guaranteed for 90 days (see portable electric tool guarantee on page 38).

9 KT 1106—Shipping weight 3 lbs. 10 oz.....\$8.99

CRAFTSMAN Medium-duty

Motor develops 1/4 HP...oil-impregnated bronze sleeve bearings. Rigid sectional housing of rugged aluminum alloy. Pin-type spindle lock. Locking trigger switch; safety release. Single reduction gears. Key chuck. No-load speed 2400 RPM.

10-foot, 3-wire cord and adapter are included. 7 3/4 inches long. Operates on 110-120-volt, 60-cycle AC. UL listed (Industrial Standards). Guaranteed for one year (see portable electric tool guarantee on page 38 for complete details).

9 KT 1109—Shipping weight 4 lbs. 5 oz.....\$14.99

CRAFTSMAN Heavy-duty

Motor develops 1/4 HP...ball bearings at heavy wear points for long, dependable service. Rigid sectional housing of polished aluminum alloy. Designed for use by professionals as well as home craftsmen. Built-in spindle lock. Double reduction gears. Locking trigger switch. No-load speed 1900 RPM.

10-foot, 3-wire cord and adapter are included. 7 3/4 inches long. Operates on 110-120-volt, 60-cycle AC. UL listed (Industrial Standards). Guaranteed for one year (see full details on page 38).

9 KT 772—Shipping weight 4 pounds.....\$19.99

Dial the speed that's best for drilling any material—wood..metal..plastic..masonry..ceramics.
You get full torque at ALL speeds



CRAFTSMAN Reserve-Power $\frac{3}{8}$ -inch
Variable-speed Electric Drill

\$49.99
without bit

A special silicon-controlled rectifier automatically feeds-in more power to maintain full torque, even when drilling through heavy-load materials like iron, steel and masonry that require low drilling speeds. This is unlike other multi-speed drills that have to cut power to get lower speeds.

You can dial any speed between 1000 and 2500 RPM. This permits you to select the speed and bit size recommended for each material by the convenient reference chart mounted on the drill. Bits last longer when you use the right speed for the job.

Motor develops $\frac{3}{4}$ HP. Has ball and needle bearings throughout for longer life. Double reduction gears. Sectional, polished-aluminum housing. Minimum chuck offset for getting into tight places. Locking trigger switch; safety release. Removable side handle gives you sure, comfortable two-hand control.

$9\frac{1}{4}$ inches long. 10-foot, 3-wire cord and adapter included. Motor operates on 110-120-volt, 60-cycle AC. UL listed (Industrial Standards). Guaranteed for one year (see details on page 38).

9 KT 1103—Wt. 5 lbs. 12 oz. \$5.00 mo. Cash \$49.99



1 $\frac{1}{4}$ -inch Drill
\$19.99
without bit



CRAFTSMAN Carrying Case

Fits any $\frac{1}{4}$, $\frac{3}{8}$ or $\frac{1}{2}$ -inch compact drill. Makes drill easy to carry... helps protect it from damaging dirt and dust. Convenient slide-out tray for holding bits and accessories.

Sturdy steel construction. Baked-enamel finish resists rust. 16 in. long, 10 in. wide, 5 in. high.

9 KT 1496—Wt. 8 lbs. 5 oz. \$5.99

See Portable Electric
Tool Guarantee
on page 38



2 $\frac{1}{2}$ -inch Drill
\$26.99
without bit

CRAFTSMAN Drills
with trigger-squeeze speed control

Start holes without skipping or jumping... drive self-tapping screws without a pilot hole or center punch

(1 and 2) Control drill speed and torque by simply pulling back on the trigger. You have complete control from 0 to maximum RPM. Sectional, polished-aluminum housing. Pin-type spindle lock for easy chuck removal.

Trigger locks at full RPM. 10-ft. 3-wire cord and adapter are included. Operates on 110-120-volt, 60-cycle AC. UL listed (Industrial Standards). Guaranteed for one year (see page 38). Order from listings at right.

1 Medium-duty Drills. Oil-impregnated bronze sleeve bearings.

$\frac{1}{4}$ -inch. Motor develops $\frac{1}{5}$ HP. 0 to 2400 RPM. Single reduction gears. $7\frac{1}{4}$ in. long.
9KT1114—Wt. 4 lbs. 5 oz. \$19.99

$\frac{3}{8}$ -inch. Motor develops $\frac{1}{4}$ HP. 0 to 1200 RPM. Double-reduction gears. $8\frac{1}{2}$ inches long.
9KT1115—Wt. 4 lbs. 8 oz. \$24.99

2 Heavy-duty Drills. Ball bearings at points of heaviest wear. Double-reduction gears. Precision helical gears.

$\frac{1}{4}$ -inch. Motor develops $\frac{1}{4}$ HP. 0 to 1900 RPM. $7\frac{1}{4}$ in. long.
9 KT 1116—Wt. 4 lbs. \$26.99

$\frac{3}{8}$ -inch. Develops $\frac{1}{4}$ HP. 0 to 1150 RPM. $8\frac{1}{2}$ inches long.
9 KT 1117—Wt. 4 lbs. 8 oz. \$31.99

In just one minute this Compact **CRAFTSMAN** Commercial Drill bored a 1/2-inch hole through a 1/2-inch steel plate in actual tests



1/4-inch Drill
\$34.99
without bit

3/8-inch Drill
\$39.99
without bit

1/2-inch Drill
\$44.99
without bit

Develops a full 3/8 HP ... and weighs only 5 pounds!
What other drill gives you so much power per pound?

1/2-inch Drill, 100% ball and needle bearings. Rugged, power-packed drill, built to stand up under continuous use in building trades, automotive shops and industry. Triple reduction gears for extra torque. No-load speed 500 RPM. Minimum chuck offset for working in tight, hard-to-get-at places. Double-pole locking trigger switch; safety release. Convenient spindle lock for easy chuck removal when using attachments. Industrial-type heavy-duty geared chuck with key. Rigid, sectional housing constructed of sturdy aluminum with non-glare satin finish.

Removable side handle for two-hand control. Mounts on either right or left-hand side. 10 1/4 inches long. Without bit. 10-foot, 3-wire cord and adapter are included. Operates on 110-120-volt, 25-60-cycle AC-DC. UL listed (Industrial Standards). Guaranteed for one year (see portable electric tool guarantee on page 38).
9 KT 1102—Shipping weight 5 pounds 15 ounces. \$5.00 monthly. Cash \$44.99

Same 3/8-HP drill in 1/4 and 3/8-inch sizes

1/4-inch Drill. Double-reduction gears for steady power. No-load speed 1600 RPM. 9 inches long, over-all. Without bit.

9 KT 1100—Shipg. wt. 5 lbs. 3 oz. \$5.00 monthly. Cash \$34.99

3/8-inch Drill. Triple-reduction gears for extra torque. No-load speed 825 RPM. 10 1/4 inches long, over-all. Without bit.

9 KT 1101—Shipg. wt. 5 lbs. 15 oz. \$5.00 monthly. Cash \$39.99

CRAFTSMAN Carrying Case. Fits any 1/4, 3/8 or 1/2-inch compact drill. Helps protect drill from damage and dust. Slide-out tray for bits and accessories. Sturdy steel construction. Baked-enamel finish. Measures 16 inches long, 10 inches wide and 5 inches high.

9 KT 1496—Shipping weight 8 pounds 5 ounces. \$5.99

See Sears Portable Electric
Tool Guarantee on page 38



35-piece Kit with 3/8-inch Drill

\$39.99

With CRAFTSMAN 1/4-HP drill (9 KT 775) described on page 40 and case (9 KT 1496) described above. Cast aluminum bench stand. 5-in. backup pad, 12 assorted abrasive discs, 6-in. lambs wool bonnet. Paint mixer. 3x3/4-in. wire wheel (from West Germany). 3x3/4-in. grinding wheel. Arbor, collar and screw for wire and grinding wheels. 7 high-speed metal bits 1/4 to 1/2-in. (from Italy). 5 wood bits 3/8 to 1 inch; 7-piece hole saw cuts to 2 1/4-in. diameter; screwdriving attachment with Phillips, flat bits (all from Japan).
99 KT 1821G2—Shipping weight 17 pounds. Kit \$39.99



25-piece Kit with 1/4-inch Drill

\$19.99

Drill or sand wood; wax and polish; mix paint or varnish; grind and wire brush metal. With CRAFTSMAN 1/4-HP drill (9 KT 1109) described on page 40.

Also includes: 5 drill bits 3/16 to 1/4 in. (from Italy); 5-in. rubber backup pad with 12 assorted sanding discs, lambs wool polishing bonnet; grinding wheel and wire brush (from West Germany); paint mixer. Fitted, hollow-core, mold plastic case (13 inches long; 9 inches wide; 5 inches high).

9 KT 18064—Shipping weight 8 lbs. 12 oz. Kit \$19.99



Economy 1/4-inch Reversible Drill

Motor develops 1/2 HP... bronze sleeve bearings. Ball thrust bearing on spindle. Removable top handle. Locking trigger switch; safety release. Sectional aluminum housing; painted finish. Double reduction gears. No-load speed 600 RPM. 12 1/2 in. long. 110-120-v., 60-c. AC. UL listed (Ind. Stds.). 90-day guarantee (see page 38). Shipping wt. 7 lbs. 2 oz. \$4 monthly. 9 KT 1105—Cash \$24.99

CRAFTSMAN Multi-speed 1/4-inch Reversible Drill

Trigger-squeeze speed control... the farther back you pull the trigger the more speed and torque you get. Precise speed adjustment from 0 to 600 RPM. If bit sticks just flip switch and back out. Trigger locks at maximum speed; safety release.

Motor develops 3/4 HP. Oil-impregnated bronze sleeve bearings. Ball-thrust bearing on spindle absorbs heavy loads. Double reduction gears. Geared chuck with key. Removable top handle. Sectional aluminum housing; polished finish. 12 1/2 in. long. 10-ft. 3-wire cord, adapter. 110-120-v., 60-c. AC. UL listed (Ind. Stds.). 1-yr. guar. (see p. 38). Shipping weight 8 lbs. 4 oz. 9 KT 1118—\$5 monthly... Cash \$33.99

CRAFTSMAN 1/2-inch Reversible Drill

Motor develops 3/4 HP... ball thrust bearing on spindle to absorb heavy loads. Permanently lubricated bronze sleeve bearings. Ideal for small contractors, home, shop and farm work.

Polished aluminum finish. All other features same as drill described at right.

110-120-volt, 60-cycle AC. 10-foot, 3-wire cord and adapter. UL listed (Industrial Standards). Guaranteed 1 year (see page 38). \$5 monthly.

Shpg. wt. 11 lbs. 9 KT 2586—Cash \$39.99

CRAFTSMAN 1/2-inch Reversible heavy-duty Commercial Drill

Motor develops 1 HP... 100% ball and needle bearings. Excellent for continuous duty and deep drilling in steel and concrete. If bit ever gets stuck, just flip reversing switch and back out. Double-pole switch lock for continuous running; has safety release.


Rigid sectional aluminum housing with non-glare satin finish. Geared key chuck with key. Double reduction gears. Spade-grip handle rotates 90°. Top handle and spade grip remove for working in tight places.

No-load speed 575 RPM. 13 inches long (only 10 inches with handle removed). 110-120-volt 25-60-cycle AC-DC. 10-ft., 3-wire cord, adapter. UL listed (Industrial Standards). Guaranteed 1 year (see details on page 38).

9 KT 778—Wt. 9 lbs. 10 oz. \$5 mo. Cash \$49.99

Steel Carrying Case. (Shown above). 8 in. wide; 13 in. long; 12 in. high. 9 KT 1471—For drills 9 KT 2586 and 9 KT 778. Shpg. wt. 10 lbs. \$6.49 9 KT 1499—For drills 9 KT 1105 and 9 KT 1118. Shpg. wt. 8 lbs. 12 oz. \$5.99

Drill Stands

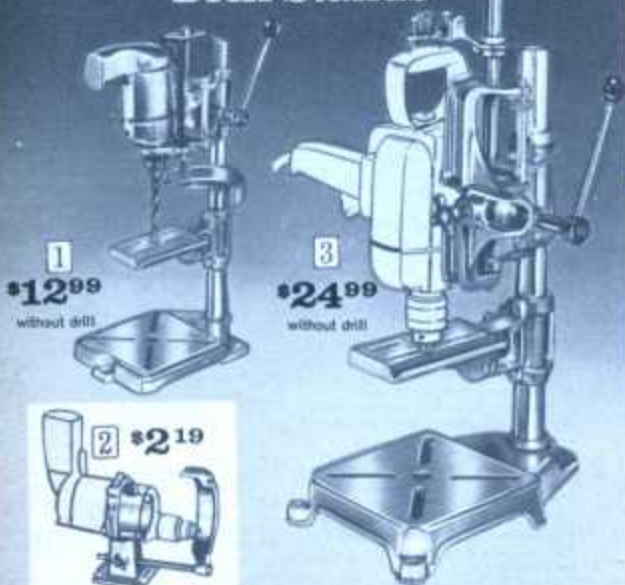

1 CRAFTSMAN 2-position Drill Stand for 1/4 and 3/8-inch drills. Universal mounting bracket fits all Sears 1/4-inch and 3/8-inch electric drills (fits most other makes, too). Can be used vertically to drill or horizontally with guard to wire-brush, grind, polish, etc. Tilt table for angle drilling. Locking depth gauge has 0 to 3-inch depth range. 4 1/2-inch throat depth. 1-inch diameter tubular column, 18 inches high. 6x6-inch cast aluminum base. 9 KT 25926—Shipping weight 9 pounds... \$12.99

2 CRAFTSMAN Bench Stand for 1/4 and 3/8-inch drills. Cast aluminum. Converts drill to bench tool for wire brushing, sharpening, sanding, etc. Protective wheel guard. Width, 3 in.; length, 3 in.; height, 8 in. 9 KT 2591—Shipping weight 1 pound 4 ounces... \$2.19

3 CRAFTSMAN Heavy-duty Drill Stand for 1/2-inch drills. Changes your drill into a 1/2-inch drill press. Fits drills which use 1/2 or 3/4-inch pipe for top handle. Adjustable rack and pinion depth control; 6-in. throat. Sturdy 7 1/2 x 7 1/2-inch cast aluminum base. Tilt table for angle drilling. Heavy-wall steel column, 27 inches high. 99 KT 25986C—Shipping weight 18 pounds... \$24.99

CRAFTSMAN 3/4-inch Reversible Commercial Drill

Reversing feature lets you back out easily... just flip the switch and you're out



Motor develops over 1 HP... 100% ball and needle bearings. Built for continuous heavy-duty work in shop or factory. Excellent for heavy construction, installation trades, etc. Triple reduction gears for extra torque.

Geared industrial key chuck; key stores in handle. Double-pole switch locks for continuous operation; safety release. Top and rear handles removable. Rigid sectional aluminum housing; non-glare satin finish. No-load speed 300 RPM. 19 inches long. 10-foot, 3-wire cord and adapter. For 110-120-volt, 60-cycle AC-DC. UL listed (Industrial Standards). 1-year guarantee (see page 38 for details).

Shipping weight 23 pounds. 99 KT 25872K—\$5.50 monthly... Cash \$109.99

No Money Down on anything Sears sells

SEE PAGE 96 FOR DETAILS



CRAFTSMAN High-speed Drills

All CRAFTSMAN industrial drills are of finest high-speed steel, heat treated 6 times and precision-ground for micro-accuracy. Black oxide coating acts as a lubricant... lengthens drill's life.

Exceed Federal Specifications GGG-D-731 b. (1) through (4) are jobber-length. Lengths of individual drills given in table at right.

(1 and 2) Drill Sets in Metal Folding Cases. Drills raise when lid is opened. Reference chart inside cover.

1 29-pc. Set. Sizes: $\frac{1}{16}$ to $\frac{3}{16}$ -inch by 64ths of an inch.
9 KT 6705—Wt. 3 lbs. 11 oz. Set \$27.99

2 21-pc. Set. Sizes: $\frac{1}{16}$ to $\frac{1}{2}$ -inch by 64ths of an inch.
9 KT 6719—Shpg. wt. 2 lbs. Set \$13.49

3 15-pc. Set. (Not shown). Sizes: $\frac{1}{16}$ to $\frac{1}{2}$ -inch by 32nds of an inch.
9 KT 6720—Shpg. wt. 2 lbs. 6 oz. Set \$15.99

4 60-pc. Set. (Not shown). Includes wire gauge sizes 1 to 60.
9 KT 6708—Wt. 1 lb. 4 oz. Set \$19.99

(3 thru 5) Drill Sets in Plastic Cases.

3 17-pc. Set. Sizes: $\frac{1}{16}$ to $\frac{1}{2}$ -inch by 64ths of an inch plus $\frac{1}{8}$, $\frac{3}{16}$, $\frac{1}{4}$, and $\frac{1}{2}$ -inch with short shanks turned down to $\frac{1}{4}$ -inch diameter.
9 KT 6711—Shpg. wt. 1 lb. 1 oz. Set \$11.29

4 13-pc. Set. Sizes: $\frac{1}{16}$ to $\frac{1}{2}$ -inch by 64ths of an inch.
9 KT 6639—Shpg. wt. 12 oz. Set \$5.49

10-pc. Set. (Not shown). Sizes: $\frac{1}{16}$, $\frac{1}{8}$, $\frac{3}{16}$, $\frac{1}{4}$, $\frac{1}{2}$ and $\frac{3}{4}$ -inch.
9 KT 6638—Shpg. wt. 10 oz. Set \$3.89

7-pc. Set. (Not shown). Sizes: $\frac{1}{16}$ to $\frac{1}{2}$ -inch by 32nds of an inch.
9 KT 6637—Shpg. wt. 10 oz. Set \$2.99

5 4-pc. Set. Sizes: $\frac{1}{16}$, $\frac{1}{8}$, $\frac{1}{4}$ and $\frac{1}{2}$ -inch with short shanks turned down to $\frac{1}{4}$ -inch diameter.
9 KT 67184—Shpg. wt. 11 oz. Set \$5.99

Individual Short-length Drills. No case.

9 KT 66364— $\frac{1}{16}$ -in. Shpg. wt. 2 oz. \$1.09

9 KT 66365— $\frac{1}{8}$ -in. Shpg. wt. 2 oz. 1.59

9 KT 66366— $\frac{1}{4}$ -in. Shpg. wt. 3 oz. 2.09

9 KT 66367— $\frac{1}{2}$ -in. Shpg. wt. 3 oz. 2.59

6 Individual Drills. The same professional-quality as high-speed drills in sets described at left and above.

Catalog Number	Diam. inches	Length inches	Shpg. wt. oz.	Price Each
9 KT 66901	$\frac{1}{16}$	$\frac{1}{2}$	1 oz.	25c
9 KT 66902	$\frac{1}{8}$	$\frac{1}{2}$	1 oz.	25c
9 KT 66903	$\frac{1}{4}$	$\frac{1}{2}$	1 oz.	29c
9 KT 66904	$\frac{1}{2}$	$\frac{1}{2}$	1 oz.	29c
9 KT 66905	$\frac{1}{8}$	$\frac{3}{4}$	1 oz.	39c
9 KT 66906	$\frac{1}{4}$	$\frac{3}{4}$	1 oz.	39c
9 KT 66907	$\frac{1}{2}$	$\frac{3}{4}$	1 oz.	39c
9 KT 66908	$\frac{1}{8}$	$1\frac{1}{2}$	1 oz.	49c
9 KT 66909	$\frac{1}{4}$	$1\frac{1}{2}$	1 oz.	49c
9 KT 66911	$\frac{1}{2}$	$1\frac{1}{2}$	1 oz.	59c
9 KT 66912	$\frac{1}{8}$	$2\frac{1}{2}$	1 oz.	59c
9 KT 66913	$\frac{1}{4}$	$2\frac{1}{2}$	1 oz.	69c
9 KT 66914	$\frac{1}{2}$	$2\frac{1}{2}$	1 oz.	69c
9 KT 66915	$\frac{1}{8}$	$4\frac{1}{2}$	2 oz.	89c
9 KT 66916	$\frac{1}{4}$	$4\frac{1}{2}$	2 oz.	89c
9 KT 66917	$\frac{1}{2}$	$4\frac{1}{2}$	2 oz.	1.09
9 KT 66918	$\frac{1}{8}$	$4\frac{1}{2}$	2 oz.	1.19
9 KT 66919	$\frac{1}{4}$	$4\frac{1}{2}$	3 oz.	1.29
9 KT 66921	$\frac{1}{2}$	$5\frac{1}{2}$	3 oz.	1.59
9 KT 66922	$\frac{1}{8}$	$5\frac{1}{2}$	3 oz.	1.79
9 KT 66923	$\frac{1}{4}$	$5\frac{1}{2}$	3 oz.	1.99
9 KT 66925	$\frac{1}{2}$	$5\frac{1}{2}$	4 oz.	2.19
9 KT 66926	$\frac{1}{8}$	$5\frac{1}{2}$	4 oz.	2.40
9 KT 66928	$\frac{1}{4}$	$6\frac{1}{2}$	5 oz.	2.79

Individual Large-diameter Drills. Turned-down shanks fit $\frac{1}{4}$ -in. electric drills.

9 KT 67151— $\frac{1}{2}$ -in. Shpg. wt. 6 oz. \$6.29

9 KT 67152— $\frac{3}{4}$ -in. Shpg. wt. 9 oz. 8.29

9 KT 67153—1-in. Shpg. wt. 12 oz. 11.29

Sears Home Utility High-speed Drill Sets


Use with power-driven tools—for wood or metal. All are jobber-length (see lengths in individual drill table at right above). Made in Italy. Not CRAFTSMAN.

29-piece Drill Set (not shown). 29 fractional sizes $\frac{1}{16}$ to $\frac{1}{2}$ -in. by 64ths of an inch, $\frac{1}{8}$ -in. size and over have turned-down $\frac{1}{4}$ -in. shanks to fit $\frac{1}{4}$ -in. drills. Come in protective plastic case.
9 KT 6710—Wt. 2 lbs. 3 oz. Set \$21.99

14-piece Drill Set (not shown). Sizes: $\frac{1}{16}$, $\frac{1}{8}$, $\frac{1}{4}$, $\frac{1}{2}$, $\frac{3}{4}$, $1\frac{1}{2}$, $2\frac{1}{2}$, $3\frac{1}{2}$, $4\frac{1}{2}$, $5\frac{1}{2}$, $6\frac{1}{2}$, $7\frac{1}{2}$, $8\frac{1}{2}$, $9\frac{1}{2}$. Four largest sizes have $\frac{1}{4}$ -in. turned-down shanks to fit $\frac{1}{4}$ -in. drill. In convenient plastic case.
9 KT 6712—Shpg. wt. 14 oz. Set \$7.49

10-piece Drill Set (not shown). Sizes: $\frac{1}{16}$, $\frac{1}{8}$, $\frac{1}{4}$, $\frac{1}{2}$, $\frac{3}{4}$, $1\frac{1}{2}$, $2\frac{1}{2}$, $3\frac{1}{2}$, $4\frac{1}{2}$, $5\frac{1}{2}$. In handy plastic case.
9 KT 67189—Shpg. wt. 8 oz. Set \$2.69


Carbon-steel Drills for use on wood only



7 Home Utility 7-piece Drill Set. Sizes: $\frac{1}{16}$, $\frac{1}{8}$, $\frac{1}{4}$, $\frac{1}{2}$, $\frac{3}{4}$, $1\frac{1}{2}$, $2\frac{1}{2}$. Jobber lengths (see drill table at right above). In convenient plastic case. Made in Italy.
9 KT 6713—Shpg. wt. 7 oz. Set \$1.19

8 Home Utility 10-piece Drill Set (not shown). Sizes: $\frac{1}{16}$, $\frac{1}{8}$, $\frac{1}{4}$, $\frac{1}{2}$, $\frac{3}{4}$, $1\frac{1}{2}$, $2\frac{1}{2}$, $3\frac{1}{2}$, $4\frac{1}{2}$, $5\frac{1}{2}$. Jobber lengths (see drill table right above). Packed in handy plastic case. Made in Italy.
9 KT 6714—Shpg. wt. 9 oz. Set \$1.39

9 CRAFTSMAN 4-piece Drill Set. $\frac{1}{4}$ -in. shank. Sizes: $\frac{1}{16}$, $\frac{1}{8}$, $\frac{1}{4}$, $\frac{1}{2}$ -inch. All sizes are 3 inches long. In handy plastic pouch.
9 KT 67212—Shpg. wt. 7 oz. Set \$2.99

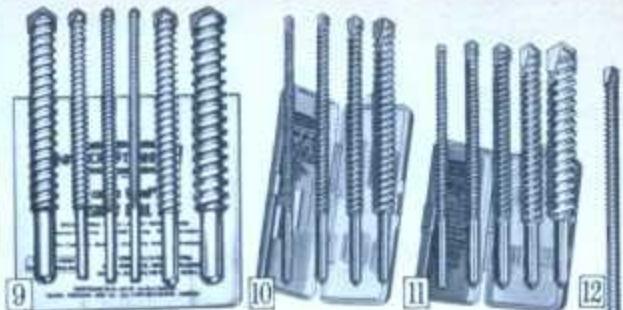

CRAFTSMAN Masonry Drills in 3 lengths

(9 thru 12) Tips are tungsten-carbide... one of the hardest of all man-made metals. Cut much faster than star drills. Screw-type flutes lift out chips as you drill. Plastic pouch.

9 6-pc. Set. One each, 6-inch length, in sizes $\frac{1}{16}$, $\frac{1}{8}$, $\frac{1}{4}$, $\frac{1}{2}$, $\frac{3}{4}$, $1\frac{1}{2}$ -in. Drills in $\frac{1}{4}$ and $\frac{1}{2}$ sizes have $\frac{1}{4}$ -in. shank. 3 $\frac{1}{2}$ -in. size has $\frac{1}{2}$ -in. shank. Others have $\frac{1}{4}$ -in. shank.
Shpg. wt. 2 lbs. 1 oz.
9 KT 6733... Set \$8.99

10 4-pc. Set. One each, 6-inch length, in sizes $\frac{1}{4}$, $\frac{1}{2}$, $\frac{3}{4}$, $1\frac{1}{2}$ -in. All have $\frac{1}{4}$ -in. shanks. Fit $\frac{1}{4}$ -in. larger electric hand drills.
9 KT 6734—Wt. 12 oz. Set \$4.19

11 5-pc. Set. One each, 4-inch length, in sizes $\frac{1}{8}$, $\frac{1}{4}$, $\frac{1}{2}$, $\frac{3}{4}$, $1\frac{1}{2}$ -in. All have $\frac{1}{4}$ -in. shanks. Fit $\frac{1}{4}$ -in. or larger electric hand drills.
9 KT 67095—Wt. 10 oz. Set \$4.19

Catalog Number	Size in.	Shank in.	Length in.	Wt. oz.	Each
9 KT 67320	$\frac{1}{16}$	$\frac{1}{8}$	4	2	89c
9 KT 67328	$\frac{1}{8}$	$\frac{1}{4}$	4	2	99c
9 KT 67321	$\frac{1}{4}$	$\frac{1}{4}$	4	3	99c
9 KT 67322	$\frac{1}{2}$	$\frac{1}{4}$	4	5	1.19
9 KT 67323	$\frac{3}{4}$	$\frac{1}{4}$	4	6	1.39
9 KT 67324	$1\frac{1}{2}$	$\frac{1}{4}$	4	6	1.39
9 KT 67325	$\frac{1}{16}$	$\frac{1}{8}$	6	9	2.39
9 KT 67327	$\frac{1}{8}$	$\frac{1}{4}$	6	11	2.99

12 Extra length Carbide-tip Drills. 12 in. long; $\frac{1}{2}$ -in. shanks. Drill through 11-inch foundation.
9 KT 67350—Size $\frac{1}{4}$ -in. Wt. 5 oz. \$1.89
9 KT 67351—Size $\frac{3}{8}$ -in. Wt. 6 oz. 2.09
9 KT 67352—Size $\frac{1}{2}$ -in. Wt. 7 oz. 2.49
9 KT 67353—Size $\frac{3}{4}$ -in. Wt. 12 oz. 2.69



13 CRAFTSMAN All-steel Drill Case. Keeps drills protected... easy to find. Lift cover, drills rise for easy selection. Close cover... they're protected.

Silver-luster top, black enamel bottom. Size, decimal equivalents easily read. Tap drill table. Meets Fed. Specs. GGG-C-116b.

For 29 drills $\frac{1}{16}$ to $\frac{1}{2}$ -in. by 64ths.
9 KT 6678—Shpg. wt. 3 lbs. \$4.49

For 60 wire-gauge drills. Holds sizes 1 to 60.
9 KT 6679—Wt. 1 lb. 11 oz. \$3.19

14 Steel Drill Case. For jobber-length drills. Lift lid to put drills in position for easy removal and insertion. Sizes by 64ths; decimal equivalents also marked. Tables inside lid. Gray baked enamel finish. Conforms to Fed. Specs. GGG-C-116b.

For 29-pc. set, $\frac{1}{16}$ to $\frac{1}{2}$ -in. 9 KT 66852—Wt. 1 lb. 6 oz. \$2.49

For 13-pc. set, $\frac{1}{16}$ to $\frac{1}{2}$ -in. 9 KT 66842—Shpg. wt. 9 oz. \$1.09

15 Open-type Drill Stand. 3 plates. 6x2 $\frac{1}{2}$ -in. Center support. Drill sizes marked. Holds up to 29 drills, sizes $\frac{1}{16}$ to $\frac{1}{2}$ -in. by 64ths.
9 KT 6693—Shpg. wt. 6 oz. 79c

Capacity for 60 wire-gauge drills in sizes from 1 to 60.
9 KT 6694—Shpg. wt. 6 oz. 79c

16 CRAFTSMAN Drill Grinding Attachment. Use with 9 KT 6429 wheel (18) below. Positive angle adjustment for all popular drills. Precision built with rustproof aluminum frame. Resharpens twist drill sizes: $\frac{1}{16}$ to $\frac{1}{2}$ -in.; No. 1 to No. 30; A to Z; 3 to 19mm.
9 KT 6677—Wt. 2 lbs. 8 oz. \$6.29

17 CRAFTSMAN Dwellling Jig. Holes for $\frac{1}{16}$, $\frac{1}{8}$, $\frac{1}{4}$, $\frac{1}{2}$, $\frac{3}{4}$, $1\frac{1}{2}$, $2\frac{1}{2}$, $3\frac{1}{2}$, $4\frac{1}{2}$, $5\frac{1}{2}$, $6\frac{1}{2}$, $7\frac{1}{2}$, $8\frac{1}{2}$, $9\frac{1}{2}$. Carriage adjusts for positive locating. Capacity up to 4 in. Cast aluminum alloy frame. 6 $\frac{1}{2}$ x3 $\frac{1}{2}$ x2 $\frac{1}{2}$ in.
9 KT 4186—Shpg. wt. 3 lbs. \$6.99

18 Grinding Wheel for reshaping twist drills, etc. Steel-reinforced alum.-oxide. 6x1 $\frac{1}{2}$ x $\frac{3}{4}$ -in. hole. 3-inch grinding surface. Designed for side grinding.
9 KT 6429—Wt. 4 lbs. 2 oz. \$5.19

19 CRAFTSMAN 3-pc. Screw Extractor Set. Sq. shanks; Nos. 1, 2, 3, 4. 5 screw extractors. Rugged tool steel. Plastic case, drill size data. Will fit tap wrenches 9KT4065 and 9KT4067 on pp. 83, 84.
9 KT 67372—Wt. 6 oz. \$2.69

20 CRAFTSMAN Swivel-head Pin Vise. Holds drills, taps, files, etc. Knurled handle. With 2 double reversible chucks: 0 to 1.25 in.; 0 to 3.2 mm.
9 KT 40682—Shpg. wt. 4 oz. \$1.69



Electric Drill Accessories

1 CRAFTSMAN Wood-screw Pilot Bits. To countersink and counterbore. Bit stop adjusts to 3 depths. Brad points for no-jump starts.

10-piece Set. Screw sizes: 4-5 (3/8, 1/2, 5/8 inch long); 6-7 (3/8, 1/2, 5/8 inch); 8-9 (3/8, 1/2, 5/8 inch); 10-11 (1, 1 1/4, 1 1/2 inches).
9 KT 4204—Shipping weight 13 oz.—Set \$4.49


5-piece Set. Sizes 4-5 (3/8 in.); 6-7 (1/2 in.); 8-9 (1 in.); 10-11 (1 1/4 in.); 12 (1 1/2 in.).
9 KT 4203—Shipping weight 8 oz.—Set \$1.79

2 CRAFTSMAN 10-piece Interchangeable Wood Bit Set. Includes 9 cutters; 1 shank for electric or hand drills. Brad points. Fits 3/8-inch or larger, drill or drill press. Sizes 3/8, 1/2, 5/8, 3/4, 1, 1 1/4, 1 1/2 inch. For extension, see 5.
9 KT 2082—Shipping weight 9 oz.—Set \$3.29

3 CRAFTSMAN Power Wood Boring Bits. 6 1/2 inches long. Hardened alloy steel; brad points for no-jump starts.

Set of 6, 1 of each size to 1 in. For 1/2-in. drill or larger. Wt. 12 oz.
9 KT 2092—Set \$3.99

Individual Power Boring Bits			
Cat. No.	Size	Wt.	Each
9 KT 2093	1/8 in.	2 oz.	79c
9 KT 2094	1/4 in.	2 oz.	79c
9 KT 2095	3/8 in.	3 oz.	79c
9 KT 2096	1/2 in.	3 oz.	79c
9 KT 2097	3/4 in.	3 oz.	79c
9 KT 2098	1 in.	4 oz.	79c
9 KT 2098 1	1 1/4 in.	4 oz.	79c
9 KT 2098 2	1 1/2 in.	5 oz.	79c

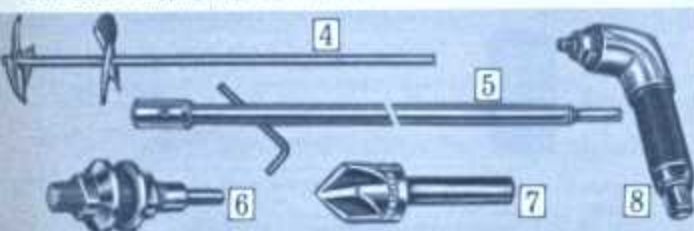

4 Point Mixer. "Fan-blades" keep paint in can. For use with electric or hand drills. 1/4-inch shank. Length 11 inches.
9 KT 25683—Wt. 6 oz.—\$5.9c

5 12-inch Power Bit Extension. 3/4 inch at socket end. 1/4-in. shank for use with 1/4-in. shank bits as with 9 KT 2082 and 9 KT 2092 sets above.
9 KT 2090—Wt. 10 oz.—\$1.39



You can convert your drill to hole saw or screwdriver

9 Adjustable Hole-saw Attachment. Three cutting blades cut holes from 1 1/4 to 2 1/4 inches in diameter. Convenient dial indicator shows size. Use this attachment for wood or plastic. Mounts in any 3/8-inch or larger drill chuck. Can be used as plug cutter with center bit removed.
Shipping weight 1 lb. 5 oz.
9 KT 2566—\$4.99

10 7-in-1 Hole Saw Attachment. Cut 1 to 2 1/4-inch diameter holes in wood, Masonite, Presdwood®, wallboard, plastic. 1/4-inch shank fits all 1/4 and 3/8-inch drills. Rugged tempered steel parts. 7 round-hole saw blades (1 to 2 1/4-in. diam.); 1/4-in. pilot bit of carbon steel has spring ejector. From Japan.
Shipping weight 13 ounces.
9 KT 2567—\$9.9c

11 Screwdriver Attachment. Made to fit all 1/4 and 3/8-inch drills. Includes one flat and one Phillips driver bit.
Drives wood screws quickly; tightens slotted-head bolts and nuts. From Japan.
9 KT 2569—Shpg. wt. 7 oz.—\$9.9c

12 Hole-saw Attachments. Made of heat-treated steel. Use for sawing metal, wood, plastics or wallboard.

Also use for plumbing and electrical installation; drill doors for locksets. Use with mandrels below.

Catalog Number	Size	Shipping weight	Price
9 KT 25780	3/4 inch	4 ounces	89c
9 KT 25781	1 inch	4 ounces	89c
9 KT 25782	1 1/4 inch	4 ounces	99c
9 KT 25783	1 1/2 inch	5 ounces	99c
9 KT 25784	1 3/4 inch	5 ounces	99c
9 KT 25785	2 inch	6 ounces	1.09
9 KT 25786	2 1/4 inch	6 ounces	1.19
9 KT 25787	2 1/2 inch	6 ounces	1.19
9 KT 25788	2 3/4 inch	6 ounces	1.29

13 Mandrels for hole saw attachments.
Size 1. For 3/4 to 1 1/4-inch diameter saws; 1/4-inch shank.
9 KT 25620—Shpg. wt. 5 oz.—\$2.19
Size 2. For 1 1/4 to 2 1/4-inch diameter saws; 1/4-inch shank.
9 KT 25621—Shpg. wt. 6 oz.—\$2.59



CRAFTSMAN Speed Reducer Kits

Complete Kit \$22.99

Basic Kit \$12.99

Each kit includes a reversible speed-reducer with sturdy cast aluminum housing and planetary gear chain that actually multiplies drill torque 7 times. Fits spindle or chuck on 3/8, 1/2 or 3/4-in. drill.

Complete Kit. (Illustrated.) Everything you need to use your electric drill as a screwdriver, nut runner, tapper, etc. Lets you tackle tougher jobs such as drilling in metals or masonry.

Includes the reversible speed-reducer plus 9-piece socket set with 1/4-inch drive adapter, 6 screwdriver bits (3 Phillips, 2 flat, 1 screw-finding). All in convenient molded plastic with fitted compartments that help you find the bit you're looking for.

9 KT 25653—Shipping weight 2 pounds 14 ounces—Kit \$22.99

Basic Kit. Includes the reversible speed-reducer described above plus adapter for 1/4-inch-drive sockets, No. 2 Phillips screwdriver bit and flat screwdriver bit.

9 KT 25657—Shipping weight 2 pounds 2 ounces—Kit \$12.99

Attachments to give your CRAFTSMAN drill extra uses

Buffer-Sander-Polisher

14 11-pc. set. Angle drive gives 2 speeds: low, for polishing, buffing; high, for sanding. Thread on 3/4x24 spindle or use adapter to fit in drill chuck. Side handle. Angle head. Speed adapter. With 5-inch rubber backup disc, lamb's wool polishing bonnet, 6 assorted sandpaper discs. Shipping weight 2 lbs. 2 oz.
9 KT 2629—Set \$5.99

CRAFTSMAN Hedge Trimmer

15 Fits 1/4-inch or 3/8-inch drills. 4 contact points on blade for clean cut. Chrome-alloy-steel sickle blade cuts 12-inch wide swath; 5/8 inch twig openings. Detachable side-mounted handle for better control and greater safety.
Shipping weight 3 pounds.
9 KT 2627—\$8.49

Circular Saw Attachment

16 Designed to fit all 3/8-inch or 1/2-inch electric drills shown on pages 40-42. Rigid cast aluminum housing. 5 1/2-inch blade mounts to arbor on drill chuck. Ideal for 2x4's; base tilts to 45° for accurate bevel cuts.
Shipping weight 3 lbs. 6 oz.
9 KT 2630—\$6.99

Kromedge 5 1/2-in. chisel-tooth combination blade rips, crosscuts. 1/4-in. hole; for 9 KT 2630 above.
Shipping weight 9 ounces.
9 KT 32403—\$1.69





CRAFTSMAN Commercial Air-impact Wrench

Delivers 160 foot-pounds of torque . . . that extra power you need for freeing those hard-to-loosen nuts, bolts and lugs

Wrench only **\$119⁹⁹**

Cut time needed to drive, remove bolts, nuts, screws, etc. up to 90% with air power! For automotive, boat shops, industrial plants . . . on farms. Trigger has built-in, adjustable stop . . . choose right torque for job, 20 to 160 ft.-lbs. Use $\frac{3}{8}$ -in. square drive impact sockets. Average air consumption 4 CFM at 90 PSI. Air-inlet $\frac{1}{4}$ -in. pipe thread. Recommended air-hose, $\frac{3}{8}$ -in. $6\frac{1}{2}$ -in. long. One-piece housing. Guaranteed 1 yr. Meets Fed. Specs. 00-W-00891.

Complete Kit **\$126⁹⁹**

Air Wrench only. (See facing page for impact tool accessories.)
9 KT 1888—Shpg. wt. 6 lbs. 5 oz. . . . \$119.99

Air-impact Wrench Kit, Tool; 8 impact sockets ($\frac{1}{2}$ to $\frac{3}{8}$ -in.); leather tool cover; metal carrying case.
99 KT 18883C—Shpg. wt. 17 lbs. Kit \$126.99

Angle-head Attachment, For tight spots.
9 KT 18885—Shpg. wt. 2 lbs. 5 oz. . . . 39.99

Protective Leather Cover for tool (9 KT 1888).
9 KT 18887—Shipping weight 5 oz. . . . \$1.29



CRAFTSMAN Air-impact Wrench Commercial duty . . . delivers up to 175 ft.-lbs. of torque

\$139⁹⁹

Ideal for automotive use . . . $\frac{3}{8}$ -in. sq. uses standard impact sockets plus double-end reversible socket (9 KT 4410) below. Built-in adjustable stop on trigger. Select proper torque from 20 to 175 ft.-lbs. $\frac{3}{8}$ -in. sq. drive. Average air consumption: 4 CFM at 90 PSI. Air inlet: $\frac{1}{4}$ -in. pipe thread. Recommended minimum hose size: $\frac{3}{8}$ -in. diameter. Meets Federal Specifications 00-W-00891. 1-year guarantee.

9 KT 1889—Shipping wt. 6 lbs. 15 oz. \$7 monthly. . . Cash \$139.99

For air compressor see Big Book

Double-end Reversible Socket

2 socket sizes in 1. For any $\frac{1}{2}$ -inch sq. drive impact tool with ext. spindle (as 9 KT 1889 above). Use 6-inch impact extension 9 KT 4417 (facing page) on short spindle tools, $\frac{3}{8}$ -inch 6-point opening on one end, $1\frac{1}{8}$ -inch other end.

9 KT 4410—Shipping weight 9 ounces . . . \$1.69

GUARANTEE: We will repair at no charge any tool on this page if it shows any defect in material or workmanship and is returned within one year from date of purchase. This does not apply to tools used in rental service.

CRAFTSMAN Commercial Air-impact Hammer

Powerful enough to cut heavy metal mufflers



Air Impact Hammer Accessories

- | | |
|-------------------------|-----------------------|
| (1) Rivet Cutter | (5) Nuts, Cold Chisel |
| (2) Pipe, Panel Cutter | (6) Straight Punch |
| (3) Pin Punch | (7) Muffler Splitter |
| (4) Retainer Attachment | |

COMPLETE KIT

Hammer, attachments (1)-(7) and case

\$69⁹⁹



Use to cut, rip, shear, scrape, peen, punch and drive

\$49⁹⁹ with retainer attachment (4), without other accessories or case

You can cut into light-gauge metal or operate it at full power on tough jobs. Split rusted tail pipe from muffler in seconds. Trigger's built-in power regulator controls speed and force of stroke. Cast aluminum handle, satin-brush finish. Plate valve design assures minimum upkeep, long service. Hammer parts are heat-treated, drop-forged steel . . . precision ground. Air-cushioned return stroke.

Chisel shank opening, .401 inch. Air inlet $\frac{1}{4}$ -in. pipe thread. Average air consumption 4 CFM at 90 PSI. 3500 impacts per minute. $6\frac{1}{4}$ in. long. Includes retainer attachment (4) shown at left. Meets Fed. Specs. 00-R-421A.
9 KT 1880—Shipping weight 4 pounds 2 ounces . . . \$49.99

Air-impact Hammer Kit, Tool with accessories (1) through (7) and handy carrying case shown at left.
99 KT 18805C—Shipping weight 16 pounds . . . Kit \$69.99

Cutters, Punches, Chisels . . . other CRAFTSMAN Air Hammer Accessories

One-piece forged high-carbon steel. Hardened and tempered to hold edges, resist mushrooming and chipping. Have shanks ground to fit standard .401-inch openings.

Quick-change, retainer attachment. Heat-treated for maximum strength and resilience.

Catalog Number	Type	Shpg. wt.	Each
(1) 9 KT 18814	Rivet Cutter	12 ounces	\$2.99
(2) 9 KT 18812	Pipe, Panel Cutter . . .	13 ounces	3.99
(3) 9 KT 18815	Pin Punch	13 ounces	2.99
(4) 9 KT 18817	Retainer Attachment . .	4 ounces	.69c
(5) 9 KT 18813	$\frac{3}{8}$ -in. Cold Chisel . . .	13 ounces	2.99
(6) 9 KT 18816	Straight Punch	13 ounces	2.69
(7) 9 KT 18811	Muffler Splitter	15 ounces	3.99

No Money
Down
on anything
Sears sells

SEE PAGE 96
FOR DETAILS

CRAFTSMAN
HEILU S. PAT. OFF.

Reversible

Impact Tool

10 times faster than hand tools!

Power-packed...develops over 100-foot-pounds of driving torque...1900 impacts per minute as a rotary hammer

A portable workshop...drive and remove nuts, bolts, screws with accessories below... use with chuck to drill wood, metal, masonry

\$59⁹⁹

without chuck, bit or case

Excellent for garage, factory, farm and service stations...can pay for itself in time saved. Ideal for auto overhaul, tire rotation, muffler removal, farm-machinery repair, building maintenance, repair shops and masonry drilling. With proper accessories it can thread rods, tap metal, wire brush metals and sand wood and metal surfaces quickly and efficiently.

Strong aluminum alloy housing. Reverse and on-off trigger switches on handle, 1/2-inch square drive. Top handle included for sure 2-hand control. 100% needle and grease-sealed ball bearings...never need lubrication.

Meets performance requirements of Federal Specifications WW-650a. For 110-120-volt, 60-cycle AC. 10-foot 3-wire cord and adapter. UL listed (Industrial Standards).

Guaranteed for one full year (see page 38).

Impact Tool only. Without chuck, case, bit. Shipping weight 9 pounds 5 ounces.
9 KT 1885—\$5 monthly...Cash \$59.99

Impact Tool with chuck and case. No bit. Shipping weight 18 pounds.
99 KT 18853C—\$5 monthly...Cash \$69.99

Chuck only. Takes 3/8 to 1/2-inch diameter bits. Use with wood bits, twist and masonry drills and taps. 1/2-inch square drive.
9 KT 2253—Shpg. wt. 1 lb. 7 oz....\$7.99

Case for electric impact tool.
9 KT 1490—Shpg. wt. 7 lbs. 2 oz....5.99

Accessories for Impact Tools

(1 thru 8) For use with electric and air impact tools. All sockets are forged steel with black oxide finish...have 6-point openings and square drive.

1 Regular-length Sockets. Exceed Federal Specifications GGG-W-660, Type I, Class I, Style A.

Cat. No.	Size	Shpg. wt.	Price
Individual 1/2-inch Drive Sockets.			
9 KT 44001	1/2 inch 5 oz.	89c	
9 KT 44002	3/4 inch 5 oz.	89c	
9 KT 44003	1 inch 5 oz.	89c	
9 KT 44004	1 1/8 inch 6 oz.	89c	
9 KT 44005	1 1/4 inch 6 oz.	89c	
9 KT 44006	1 1/2 inch 7 oz.	99c	
9 KT 44007	1 3/4 inch 7 oz.	99c	
9 KT 44008	1 7/8 inch 8 oz.	99c	
9 KT 44009	2 inch 10 oz.	\$1.09	
9 KT 44011	1 inch 11 oz.	1.19	

Cat. No.	Size	Shpg. wt.	Price
Individual 3/4-inch Drive Sockets.			
9 KT 47571	3/4 inch 3 oz.	79c	
9 KT 47572	1 inch 3 oz.	79c	
9 KT 47573	1 1/8 inch 3 oz.	79c	
9 KT 47574	1 1/4 inch 3 oz.	79c	
9 KT 47575	1 1/2 inch 4 oz.	79c	
9 KT 47576	1 3/4 inch 4 oz.	79c	
9 KT 47577	2 inch 4 oz.	79c	

11-piece 1/2-inch Drive Socket Set. Includes one each of individual 1/2-inch sockets above. Metal carrying tray.
9 KT 44019—Wt. 3 lbs. 13 oz....Set \$8.98

2 Extra-deep and Medium-deep Sockets. Exceed Federal Specifications GGG-W-660, Type I, Class I, Style B.

Catalog Number	Size	Shpg. wt. lbs. oz.	Price each
1/2-inch Drive Extra-deep Sockets.			
9 KT 47590	1/2 inch	10	\$1.39
9 KT 47591	3/4 inch	10	1.39
9 KT 47592	1 inch	11	1.39
9 KT 47593	1 1/8 inch	11	1.49
9 KT 47594	1 1/4 inch	12	1.39
9 KT 47595	1 1/2 inch	12	1.49
9 KT 47596	1 3/4 inch	13	1.59
9 KT 47597	2 inch	14	1.69
9 KT 47598	1 1/2 inch	2	1.79
9 KT 47599	1 inch	1	1.89

Catalog Number	Size	Shpg. wt. lbs. oz.	Price each
3/4-inch Drive Medium-deep Sockets.			
9 KT 47581	3/4 inch	4	89c
9 KT 47582	1 inch	4	89c
9 KT 47583	1 1/8 inch	4	99c
9 KT 47584	1 1/4 inch	4	99c
9 KT 47585	1 1/2 inch	4	99c
9 KT 47586	1 3/4 inch	5	99c
9 KT 47587	2 inch	5	99c



3 Flex Impact Sockets. Exceed Federal Specifications GGG-W-660, Type I, Class 4.

Catalog No.	Size	Shpg. wt.	Each
9 KT 47411	1/2 inch	8 oz.	\$2.99
9 KT 47412	3/4 inch	8 oz.	2.99
9 KT 47413	1 inch	8 oz.	2.99
9 KT 47414	1 1/8 inch	9 oz.	3.09
9 KT 47415	1 1/4 inch	9 oz.	3.19
9 KT 47416	1 1/2 inch	9 oz.	3.29
9 KT 47417	1 3/4 inch	9 oz.	3.39
9 KT 47418	2 inch	10 oz.	3.49
9 KT 47419	1 inch	11 oz.	3.59

4 CRAFTSMAN Impact Adapter. Converts 1/2-inch to 3/4-inch square drive...use 1/2-inch drive tool with 3/4-inch sockets.
9 KT 44124—Shpg. wt. 5 oz....99c

5 Screwdriver Chuck and Bits. 1/2-inch square drive. Collet chuck; No. 2 Phillips, No. 12, No. 14 flat bits with finders.
9 KT 18862—Wt. 1 lb. 2 oz. Set \$15.99

6 Impact Chuck. 1/2-inch square drive. 1/4 to 1/2-inch capacity.
9 KT 2253—Wt. 1 lb. 7 oz....\$7.99

7 Universal Joint. 1/2-inch square drive.
9 KT 44125—Shpg. wt. 8 oz....2.69
3/4-inch square drive.
9 KT 44123—Shpg. wt. 4 oz....2.39

8 6-inch Extension. 1/2-inch square drive.
9 KT 4477—Shpg. wt. 12 oz....\$1.69

No Money Down on anything Sears sells...see page 96

CYBERA IMAGE 2 **Sears** 47

CRAFTSMAN

REG. U.S. PAT. OFF.

Variable-speed Sabre Saw with trigger speed-control

Just increase trigger pressure for more speed and torque. You can use the right speed for every job for more efficient sawing.


\$44⁹⁹

Motor develops $\frac{1}{4}$ HP. Trigger-speed-control makes it easier to start and finish cuts, compared to a single-speed saw. Range 0 to 3000 strokes per minute. Trigger-lock at maximum speed with safety release.

Full 1-inch stroke for extra capacity and faster cutting. Ball, roller and sleeve bearings for smooth operation and long life. Counterbalanced drive reduces vibration. Rigid sectional housing of polished aluminum alloy. Extra top knob for two-hand control. Extra-large base plate (3 $\frac{1}{2}$ x8 inches) gives solid support for more accurate cutting. Tilts 0 to 45° to either side. No need to drill holes for blind cuts. Just tip saw and begin anywhere. Built-in sawdust blower keeps line clear. Circle-cutting and edge-guide attachment.

Plastic chip shield. 8 blades. 10-ft. 3-wire cord with adapter. For 110-120-volt, 60-cycle AC. UL listed (Industrial Standards). Guaranteed one year (see page 38). See side-cutting and flush-cutting attachments (and other accessories) on opposite page.

9 KT 2797—Shipping weight 8 pounds 4 ounces.....\$44.99

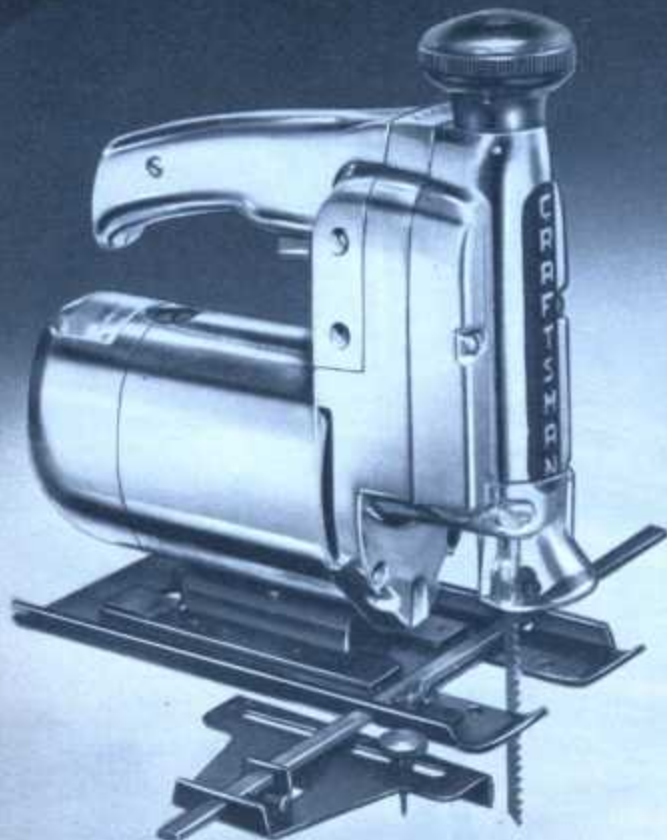

CRAFTSMAN single-speed Sabre Saw

Our finest single-speed saw. Counter-balanced drive reduces vibration for more accurate work

\$26⁹⁹

Motor develops $\frac{1}{4}$ HP. A sabre saw does the work of a rip, crosscut, coping, jig, scroll, hand, keyhole and hack saw. No need to drill holes for blind cuts. Easily cuts 2x4's, metals and plastics.

$\frac{1}{2}$ -inch stroke. No-load speed 3200 strokes per minute. Ball and sleeve bearings. Rigid sectional housing of polished aluminum alloy. Slide switch. Base plate tilts 0 to 45° to either side. Built-in sawdust blower. Circle-cutting and edge-guide attachment. 3 blades. 10-foot 3-wire cord with adapter. 110-120-volt, 60-cycle AC. UL listed (Industrial Standards). Guaranteed 1 year (see page 38). See accessories bottom of facing page.

Shpg. wt. 5 lbs. 11 oz. 9 KT 2770.....\$26.99



\$15⁹⁹

Single-speed Sabre Saws



\$11⁹⁹

CRAFTSMAN. Develops $\frac{1}{4}$ HP. A medium duty saw that will handle most home-workshop projects. Cuts plywood, 2x4's, metals. Precision sleeve bearings. Clamshell-type housing of polished aluminum alloy. $\frac{1}{4}$ -inch stroke. On-off switch. Base plate tilts 0 to 45°. Sawdust blower. 3 blades. 10-ft. 3-wire cord, adapter. 110-120-volt, 60-cycle AC. UL listed (Industrial Standards). Guaranteed one year (see page 38).

9 KT 2773—Wt. 6 lbs. 7 oz. \$15.99

Economy. Develops $\frac{1}{4}$ HP. Bronze sleeve bearings. Aluminum alloy housing; gray enamel finish. $\frac{1}{2}$ -in. stroke. Toggle switch. Base plate tilts 0 to 45°. Sawdust blower. 3 blades for wood and metal. 6-ft. 3-wire cord, adapter. 110-120-volt, 60-cycle AC. UL listed. Guaranteed 90 days (see page 38). Not CRAFTSMAN.

Shpg. wt. 3 lbs. 13 oz. 9 KT 27753.....\$11.99

CRAFTSMAN Sabre Saw Blades . . fit all leading makes of saws

Here's why these blades are so much harder, sharper and longer-lasting than ordinary stamped steel blades. First, they're given a special heat-treatment which produces a flexible steel with tremendous toughness. Then AFTER the heat-treatment, they're precision-ground with grinding wheels (not simply filed) for exceptional sharpness and accuracy.

Fit following makes of saws—CRAFTSMAN . . Black and Decker . . Dormeyer . . Diston . . Stanley . . Millers Falls . . Skil . . Ram . . Speedway . . Shopmate . . Forsberg . . McGraw and others.

Metal-cutting blades are M2 high-speed steel (chromium, vanadium and tungsten). Others are high-carbon steel.

Shpg. wts. are as follows: all pkgs. of two, 2 oz. All pkgs. of twenty-four, 7 oz. 9 KT 2875 and 9 KT 2879: 2 oz. each.



Teeth alternate evenly to left and right of center to share the workload

	Teeth per in.	Read description of uses below	Length inches	Catalog Number	Pkg. of	Per Pkg.
1	7	Soft wood (1x4's, 2x4's, plaster-board). Ripping	3 $\frac{1}{2}$	9 KT 28711 9 KT 28713	2 24	59c \$5.99
2	10	Hardwood, wallboard, general cross-cutting (not for plywood)	3 $\frac{1}{2}$	9 KT 28712 9 KT 28714	2 24	59c 5.99
3	14	All-purpose—for wood, steel, non-ferrous metals. $\frac{1}{2}$ in. or thicker	3 $\frac{1}{2}$	9 KT 28724 9 KT 28743	2 24	79c 7.99
4	24	All non-ferrous metals (brass, copper, aluminum, etc.)	3	9 KT 28702 9 KT 28703	2 24	79c 7.99
5	32	Steel rods, pipe, sheet steel, etc.	3	9 KT 28701 9 KT 28704	2 24	79c 7.99
6	10	Finish cuts in plywood, veneer, to 1 $\frac{1}{2}$ in. thick. Has tapered back	3	9 KT 2876 9 KT 28703	2 24	99c 9.99
7	Knife edge	Rubber, leather, tile, cardboard, wallboard	3	9 KT 2873		Package of 2 59c
8	7	Extra-long blade for branches, logs, wall partitions, etc.	6	9 KT 2875		Each 79c
9	3	For deep angle cuts with Saws with 1-inch stroke	6	9 KT 2879		Each 79c

CRAFTSMAN Multi-speed

REG. U.S. PAT. OFF.

Reserve-Power

Sabre Saw

Now develops $\frac{1}{2}$ HP...twice
as powerful as ever before

This extra power means smoother and faster
sawing as well as longer tool life.

You can dial the right speed for every job...
from delicate wood veneers to tough steel
pipe. Speed range: 1000 to 3000 strokes per
minute.

Silicon-controlled rectifier increases power
automatically for heavy loads... maintains
pre-set sawing speed. You get full torque at
ALL speeds.

Extra-large base-plate is adjustable four ways
—0 to 45° right and left... two positions front
to back.



\$54⁹⁹

By far the finest Sabre Saw Sears has ever sold

This new, power-packed saw is one of the
most important additions we have made to
the CRAFTSMAN power tool line in years! Don't
confuse it with sabre saws which reduce
speed by cutting down power. Full torque is
always available at all speeds.

Blades last up to 4 times longer because
you have the right speed for every job and
every material. Dial high speeds for wood
up to 4 in. thick; medium speeds for non-
ferrous metals (copper, aluminum, brass,
etc.); low speeds for steel and plastics.

Does the work of a rip, crosscut, coping,
jig, scroll, hand, keyhole and hack saw. No
need to drill holes for blind cuts... just tip
saw and begin anywhere.

Full 1-inch stroke for extra capacity and
faster cutting. Ball, roller and sleeve bearings.
Guide-attachment for splinter-free cuts in ply-
wood and veneer. Plastic chip-shield. Rigid sec-
tional aluminum alloy housing with polished
finish. Cool plastic-coated handle. Extra top
knob for 2-hand control. Trigger switch with
safety release. Counter-balanced drive reduces
vibration. Extra-large base plate (37½x8 in.).
Sawdust blower. Circle-cutting and edge-
guide attachment. Handy blade-storage tube
attaches to cord. 8 blades. 10-ft. 3-wire cord
and adapter. 110-120-volt 60-cycle AC. UL
listed (Industrial Standards). Guaranteed one
year (see page 36).

9 KT 2799—Shpg. wt. 9 lbs.\$54.99

Attachments for saw above and for 9 KT 2797 on top of facing page



Edge-cutting Attachment.
For cutting close along-
side a wall. Shipping
weight 1 lb. 14 oz.
9 KT 27717.....\$4.99



Flush-cutting Attachment.
For cutting close to wall
in front of tool. Shipping
weight 1 lb. 10 oz.
9 KT 27718.....\$1.99

Sabre Saw Accessories

1 Steel Carrying Case. For all
sabre saws on these two
pages. Roomy 10x16x5 inches.
Shipping wt. 8 lbs. 7 oz.

9 KT 1495.....\$5.49

2 Sabre Saw Table. Makes
your saw much more useful.
Excellent for cutting small wood
parts. Miter gauge. Two miter
grooves. Strong stamped steel.
For use with all saws on these
two pages. 14½x16½ inches.
Shipping wt. 7 lbs. 10 oz.

9 KT 17416.....\$7.49

**3 Circle-cutting and edge-
guide Attachment.** For cut-
ting intricate curves, perfect
circles and straight lines. Fits
all saws on these 2 pages. In-
cluded with all saws except
9 KT 2773 and 9 KT 27753.
Shipping weight 10 ounces.

9 KT 27738.....\$1.99

4 Handy Blade Holder. For ex-
tra blades; also for twist
drills. Attaches easily to cord.
Shpg. wt. 4 oz.
9 KT 2872.....99c



No Money
Down
on anything
Sears sells

SEE PAGE 96
FOR DETAILS



CRAFTSMAN 7-inch Saw
... develops 1½ HP


\$29.99

Ball and precision sleeve bearings. Heat resistant wire in armature. Aluminum clamshell-type housing. 0 to 2¼ in. cut at 90°; 0 to 1½ in. at 45°. No-load speed 5000 RPM. Kromedge® combination blade. 10 foot 3-wire cord, adapter, wrench, rip guide included.

110-120 volt, 60 cycle AC. UL listed (Industrial Standards). Guaranteed for 1 year, see details, page 38. Order accessories, below right.

9 KT 2768—Shipping weight 13 pounds..... \$29.99

Equip entire shop from this book.
See index on page 96.

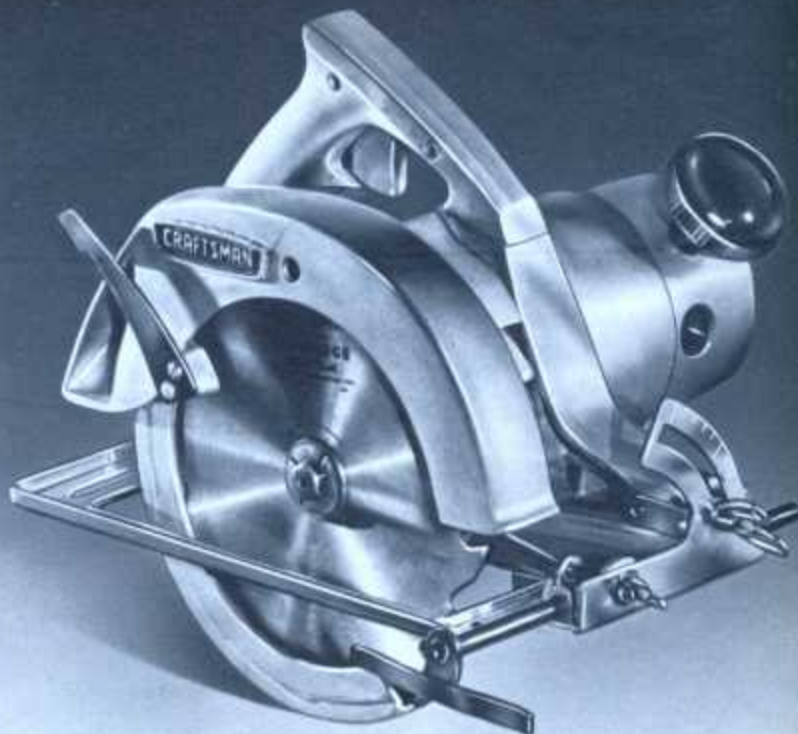

CRAFTSMAN 7-inch Saw.. develops 1½ HP

\$41.99

- Easy-view housing design... you always see your cutting line
- Side-ejection sawdust chute... directs dust away from you


Ball-bearings at heavy wear points. Wrap-around base gives full support for right, left-hand cutting. Anti-kickback safety clutch. Heat-resistant wire in armature. Auxiliary knob; rip guide. Precision helical gears for long life.

Kromedge® chisel-tooth combination blade stays sharp up to 5 times longer than ordinary ones. Polished aluminum alloy

housing. No-load speed 5300 RPM. Cuts dressed 2x4 at 45°. Single guide line for angle cuts.

Depth of cut 0 to 2¼ in. at 90°; 0 to 2 in. at 45°. 110-120-v., 60-c., AC. UL listed (Ind. Stds.). 10-ft., 3-wire cord; wrench; adapter. One-year guarantee (see page 38). For carrying case, see below.

99 KT 2778C—Shipg. wt. 15 lbs. ... \$41.99

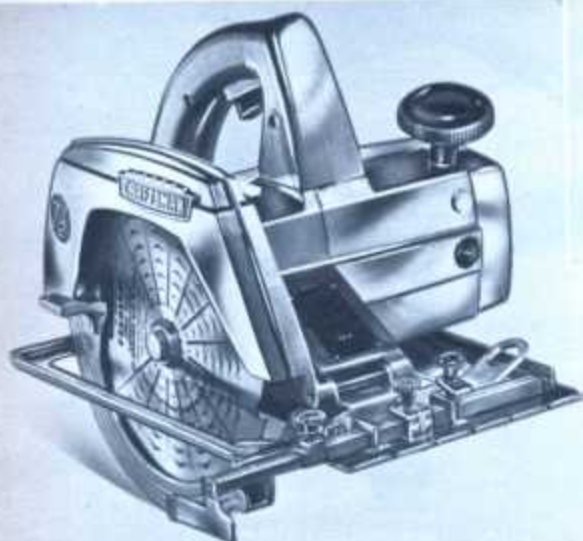

CRAFTSMAN 7½-inch Saw
develops over 2 HP

\$59.99

- Electro-safety switch protects against motor burnout. Cuts off power if overloaded... resets itself automatically
- Push-button arbor lock... change blades fast
- Rip guide telescopes... self-storing wrench

100% ball and needle bearings. Special heat-resistant wire in armature. Kromedge chisel-tooth combination blade... wrap-around base plate. Bearings are permanently lubricated for longer service.

Rigid aluminum sectional housing; retractable blade guard. Helical gears. Two-position knob. Has self-storing blade wrench.

Depth of cut: 2¼ inches at 90°; 2 inches at 45°. No-load speed about 5500 RPM. 110-120-volt, 60-cycle AC. 10-ft. 3-wire cord, adapter, rip guide. UL listed (Industrial Standards). Guaranteed one year (see page 38).

99 KT 2789C—Shipping weight 17 pounds..... \$59.99



Low-priced 7-inch Saw

\$19.99

Develops 1½ HP. Sleeve bearings. Heat-resistant wire in armature. Wrap-around base. Retractable blade guard. Throw-away blade. Aluminum housing. Depth of cut: 0 to 2¼ in. at 90°; 0 to 1½ in. at 45°. No-load speed 5000 RPM. 6 ft. 3-wire cord, adapter. No rip guide. 110-120-v., 60-c AC. UL listed (Ind. Stds.) Guaranteed 90 days, see page 38.

9 KT 2767—Shipping weight 13 lbs. ... \$19.99

Rip Guide for above.

9 KT 27679—Shipping weight 9 ounces. ... 99c



(1 and 2) CRAFTSMAN Steel Cases. For any saw on this page, most other 6-in. through 7½-in. saws. Heavy-gauge steel. Silicon enamel finish.

1 With single hasp. 10x13x12 inches high. Full-length piano-type hinge. Blade storage rack.
9 KT 1477—Shipping weight 9 lbs. 12 oz. ... \$5.99

2 With double hasp. 15x12x12-in. high. Double-hinged back. Separate storage compartments.
99 KT 1483C—Shipping weight 15 pounds. ... \$9.99


3 Guide. For electric hand, portable sabre saws... accurate angle cuts. Use as protractor, 0° to 72° right or left.
9 KT 1719—Shipping weight 3 lbs. 2 oz. ... \$2.99

4 Gear-case Lubricant. Net wt. 4 oz.
9 KT 2593—Shipping weight 9 ounces. ... 69c

5 Table. Mounts electric hand saw for non-precision cut-off work. 25x20x11 in. high. Rip fence, miter gauge. Steel. For switch, see 9 KT 1208, page 36.
99 KT 1713L—Shipping weight 21 pounds. ... \$14.99

SO RUGGED..SO POWERFUL

..it performed tests equal to crosscutting 75,000 construction-type 2x12's. Never once overheating and with no mechanical or electrical failures

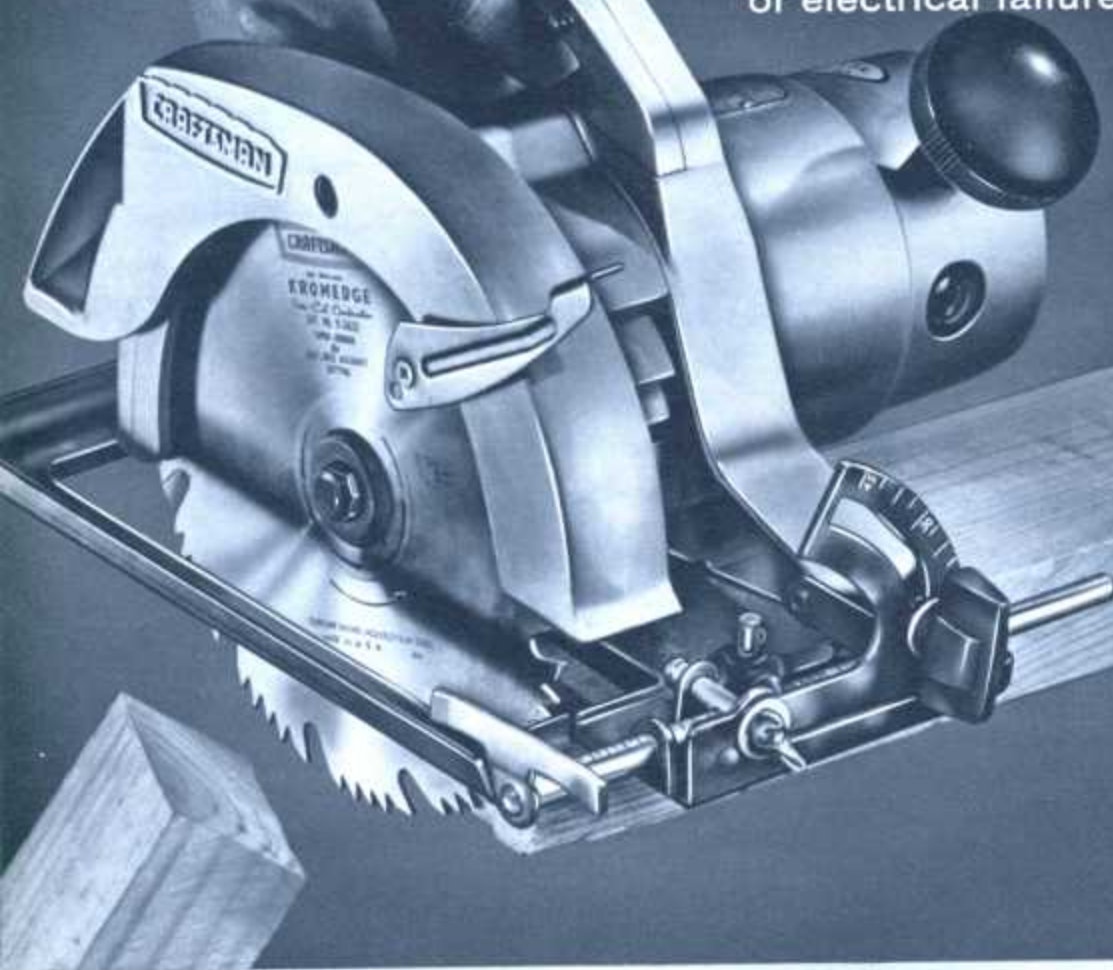

CRAFTSMAN Commercial

REG. U.S. PAT. OFF.

7-inch Saw develops 2 HP

Only **\$51⁹⁹**



Special 2-in-1 Base Design

Detachable wrap-around sub-base plus "flush-cut" base for cutting against vertical surfaces



Easy-view Blade Guard

Cut-away section of blade guard lets you see exactly where the blade is cutting for precise work

100% ball and needle bearings, sealed and permanently lubricated. Side-ejection sawdust chute directs dust away from you... keeps line clear. Push-button arbor lock for fast blade change. Dynamically-balanced armature for minimum vibration... wound with special heat-resistant wire that helps prevent burn-out and abrasion.

Hardened helical steel gears for maximum power transmission. Anti-kickback safety clutch helps protect tool and user. Rigid sec-

tional aluminum housing has non-glare satin finish. Auxiliary knob for 2-hand control.

Kromedge® taper-ground blade. Retractable blade guard with lever. Graduated rip guide. Single guide line for all angle cuts. 0 to 2 1/4-inch cut at 90°; 0 to 2-inch at 45°. No-load speed 5500 RPM. 110-120-volt, 25-60-cycle AC-DC. 10-ft. 3-wire neoprene cord, adapter, wrench, UL listed (Industrial Standards). Guaranteed 1 year (see page 38). 99 KT 2780C—Shipping wt. 17 lbs. . \$51.99

No Money Down on anything Sears sells SEE PAGE 90

CRAFTSMAN 7-inch Polisher or Sander

For commercial work in auto shops or in light industry



Carrying Case \$699

For sander 9KT776 or polisher 99KT777C shown at right. Sturdy enamel-finished steel. Easy-to-grip handle. 8x9x20 in. 9 KT 1479—Wt. 13 lbs. . . \$69.99

Either tool
\$6999
without accessories shown



CRAFTSMAN Sander-Polisher

2 speeds . . . one for fast, rough sanding
. . . the other for gentle buffing, polishing

Convenient two-position control switch. Rigid sectional aluminum housing. Polished finish. Auxiliary handle mounts in 3 positions. Motor brushes externally accessible. 6-inch diameter rubber backup pad. UL listed (Ind. Stds.) Motor develops $\frac{1}{2}$ HP. 100% ball and needle bearings. Precision helical gears for long life. $\frac{1}{2}$ -inch x 20-thread spindle takes $\frac{1}{2}$ -inch chuck 9 KT 2980 on page 23 . . . permits converting tool to electric drill. Includes 3 assorted sandpaper discs, spanner wrench and polishing bonnet. 10-ft. 3-wire cord, adapter. 110-120-volt, 60-cycle AC. Guaranteed 1 year, see page 96 for full guarantee. 9 KT 1151—Shipping weight 8 lbs. 8 oz. \$5 monthly. . . . Cash \$39.99

Aluminum-oxide Sanding Discs. Fit 9KT1151; former 9-794, 9-1150. 6-in. diameter, $\frac{1}{2}$ -in. center hole. Package of 6. Shipping weight 7 ounces. 9 KT 25293—Fine. . . Pkg. 59c
9 KT 25294—Medium Pkg. 69c
9 KT 25295—Coarse. . . Pkg. 79c

6 Steel Carrying Case. Sturdy enamel finish. Easy-grip handle. For 9KT1151 above and former 9-794 and 9-1150. 8x13x12 in. 9 KT 1499—Wt. 8 lbs. 12 oz. \$5.99

Lamb's Wool Polishing Bonnet. For 9KT1151 above and former 9-794, 9-1150. 6-inch diameter. 9 KT 2527—Wt. 4 oz. Each \$1.19

These tools are specialists . . . precision engineered to take constant use . . . Low front design gets in those tight places . . . Guaranteed 1 full year (see page 38).

1 Polisher. Buffs and polishes large wood or metal areas in no time. With dispenser (2) sold below, you can apply wax or polish as you buff. Motor develops over 1 HP, 1950 RPM; has ball bearings and spiral-bevel gears. Flexible backup pad gives under pressure—no ugly marks. Eye-bolt for overhead support. Handle can be used on either side. Non-glare satin finish. Includes lamb's wool polishing bonnet, can of wax, 10-ft. 3-wire cord, adapter, 110-120 volt, 25-60 cycle AC-DC. UL listed (Ind. Stds.). 99 KT 777C—Shipping weight 15 pounds. \$5 monthly. . . . Cash \$69.99

2 Polish Dispenser. Nozzle extends beyond bonnet's edge. $\frac{1}{2}$ -pint capacity. 9 KT 2842—Shipping weight 1 pound, 3 ounces. . . . \$6.49

Lamb's Wool Polishing Bonnet. Replacement bonnet for above polisher. 9 KT 2528—Shipping weight 5 ounces. . . . \$1.39

3 Sander. Develops high speed (4400 RPM) needed for heavy sanding or paint removal, feather edging or weld grinding. Motor develops over 1 HP, has ball bearing construction, spiral-bevel gears for lengthy dependability. Eyebolt for overhead support. Non-glare satin finish. Handle can be used on either side. Includes 3 sanding discs, backup pad, 16 $\frac{1}{4}$ -inches long, 10-ft. 3-wire cord, adapter. 110-120-V., 25-60 c. AC-DC. $\frac{1}{2}$ -in. x 11-thread spindle fits (4) and (5) below. UL listed (Ind. Stds.). Order carrying case at upper left. 9 KT 776—Shipping weight 14 pounds. \$5 monthly. . . . Cash \$69.99

4 Safety Guard. Use with (5). Shipping wt. 1 lb. 8 oz. 9 KT 1710. . . . \$6.49

5-inch Cup Wire Brush. Fits $\frac{1}{2}$ -in., 11-thread spindle. 9 KT 64105—Wt. 2 lbs. 10 oz. \$4.99

4-inch Cup Grinding Wheel. Fits $\frac{1}{2}$ -in., 11-thread spindle. 9 KT 6417—Wt. 2 lbs. 10 oz. \$5.49

5 Grinding Disc. 7x $\frac{1}{4}$ -in. Fits $\frac{1}{2}$ -in. spindle. Alum. oxide. Use with (4). 9 KT 64101—Wt. 1 lb. 1 oz. . . . \$2.79

Aluminum Oxide Sanding Discs. For sander (3). Have tough fiber backing. 7-in. diam., $\frac{1}{2}$ -in. center hole. Pkg. of 10.

Catalog No.	Qty.	Shpg. wt.	Pkg.
9 KT 25290	80	1 lb. 2 oz.	\$3.39
9 KT 25291	50	1 lb. 10 oz.	3.69
9 KT 25292	36	1 lb. 12 oz.	3.99

No Money Down on anything Sears sells

SEE PAGE 96

CRAFTSMAN



1 Dust Pick-up Adapter.
Fits sander (3) at right.
Connects to Home-n-Shop
Vacs on page 17 and fits
most tank-type vacuum
cleaners. No messy clean-
ups after sanding... surface
is ready for finishing.
6-foot hose. Shipping wt.
2 lbs. 3 oz.
9 KT 22405.....\$6.99



CRAFTSMAN Orbital Sander \$18.99

Sand wood, remove old paint or varnish... smooth
dry wall joints. Also use as polisher with pad
9 KT 2530 below. Universal motor. No-load speed
4200 orbits per minute. 3½x7-inch pad. Polished
aluminum housing. UL listed. 10-foot 3-wire cord
and adapter. 110-120-volt, 60-cycle AC. Two each,
fine, medium and coarse sanding sheets included.
Guaranteed 1 year (see page 38 for details).
9 KT 2582—Shipping weight 6 lbs.....\$18.99

Dust Pick-up Adapter (not shown). For above sander.
Fits Home-n-Shop Vacs or tank-type vacs. 6-ft. hose.
9 KT 25815—Shipping wt. 3 lbs. 7 oz.....\$6.99

CRAFTSMAN Finishing Sander \$14.99

For fine finishing. Also use as polisher with pad sold
below. Magnetic impulse driven... 14,400 strokes per
minute. 3½x7-inch pad takes ¼ of a standard sand-
paper sheet. Rigid aluminum housing... polished
finish. Rubber mounted handle helps absorb vibra-
tion. UL listed. 10-ft. 3-wire cord and adapter.
110-120 volt, 60-cycle AC. Two each, fine, medium
and coarse aluminum oxide sheets included. Guar-
anteed 1 year (see page 38 for details).
9 KT 762—Shipping weight 5 lbs.....\$14.99

Lamb's Wool Polishing Pad for 9KT762, 9KT2582.
9 KT 2530—Shipping weight 2 oz.....69c

Lamb's Wool Pad for former 9-769, 4½x11 in.
9 KT 2537—Shipping weight 3 oz.....89c

Economy Finishing Sander \$9.99

Use also as polisher with pad sold below. Magnetic
impulse driven... 14,400 strokes per minute. 3x6 in.
pad. Hi-impact plastic housing shaped for a firm,
comfortable grip. UL listed. 6 ft. 3-wire cord and
adapter. 110-120-v., 60-c. AC. Two each, fine,
medium and coarse aluminum oxide sanding sheets
included. Guaranteed 90 days (see page 38).
9 KT 2580—Shipping wt. 3 lbs. 2 oz.....\$9.99

**Lamb's Wool Polishing Pad for 9KT2580 above
and former 9-2242 and 9-766. (Not shown.)**
9 KT 2782—Shipping weight 3 oz.....59c



\$49.99 with built-in dust pick-up **\$42.99** without built-in dust pick-up

CRAFTSMAN ½-HP REG. U.S. PAT. OFF.

Dual-action Sanders

- Flip lever... shifts from orbital, fast-rough to straight-line, fine sanding
- Built for heavy continuous service in cabinet, boat or auto shops

2 With built-in dust pick-up system. Vacuum system collects
sawdust in swivel mounted bag.
9 KT 2241—Shpg. wt. 9 lbs. 12 oz. \$5 monthly... Cash \$49.99

3 Without built-in dust pick-up. See adapter (1) at left.
9 KT 2240—Shpg. wt. 9 lbs. 2 oz. \$5 monthly... Cash \$42.99

Lamb's Wool Polishing Pad for above sander. (Not shown.)
9 KT 2537—Shipping weight 3 ounces.....89c



CRAFTSMAN Dual-action Sander

3½x7½-inch pad changes from a fast-working orbital
sander to a fine-finish, straight-line sander with a turn
of a key. Sanding pad extends beyond sander sides
for corners. Universal ball-and-sleeve bearings in
motor. 3500 orbital or straight-line strokes per minute.
Knob for 2-handed sanding. Polished aluminum alloy
housing. UL listed (Ind. Stds.). 10-ft. 3-wire cord,
adapter. 110-120-volt, 60-cycle AC. Two each, fine,
medium, coarse aluminum oxide sheets included.
Guaranteed 1 year (see page 38 for details).
9 KT 2246—Wt. 6 lbs. 6 oz. \$4 monthly. Cash \$29.99

Lamb's Wool Polishing Pad for above. (Not shown.)
9 KT 2530—Shipping weight 2 oz.....Each 69c



Heavy-duty Carrying Case. Pro-
tects and stores all sanders on this
page. All steel with full-length,
piano-type hinge, carrying handle,
locking hasp. Cord-clips on top.
Charcoal gray enamel finish. 8x
13x12 in. high.
9 KT 1476—Wt. 9 lbs. 7 oz. \$5.99

CRAFTSMAN Commercial 4-inch Belt Sanders..develop 1½ HP

Handy slide switch for 2-speed operation



Now with commercial-duty motor . . extra-large brushes . . overload-resistant insulations

Without built-in dust collector **\$69⁹⁹**

With built-in dust collector **\$79⁹⁹**

Same belt sander as 99 KT 2267C described at right, but without built-in dust pick-up. Easily converts to almost dust-free sanding with dust pick-up nose and adapter attachment 9 KT 22605 at right below. No-load belt speeds: *high*—1500 surface feet per minute; *low*—1250 surface ft. per minute.

Includes three assorted aluminum-oxide sanding belts: one fine, one medium and one coarse. Commercial-duty motor operates on 110-120-volt, 60-cycle AC. With 10-foot, 3-wire cord and adapter. UL listed (Industrial Standards). Guaranteed one year (see guarantee below).

99 KT 2262C—Shipping weight 18 pounds. \$5 monthly. Cash \$69.99

GUARANTEE FOR SANDERS AND POLISHERS

We will repair at no charge any portable sander or polisher on these two pages that shows defects in materials or workmanship, if returned within one year of the date of purchase. See page 38 for more details.

Large 4x24-inch sanding belt provides 24 sq. in. of sanding surface . . gives smooth, stable sanding even on irregular surfaces . . helps prevent gouging. Belt tracks perfectly . . change in seconds with quick-release lever. Sands flush to vertical surfaces. Choice of 2 speeds: *high* (1275 surface feet per minute) for fast work on regular sanding jobs; *low* (1050 surface feet per minute) for polishing metal and wood with special belts listed below.

Built-in dust pick-up system enclosed in high-impact housing. Dust bag detaches for quick emptying . . held upright by stiff wire frame . . swivel-mounted to stay out of your way while sanding. Aluminum alloy housing with non-glare satin finish. Ball and needle bearings. Locking double pole trigger switch with safety release. Combination gear and cogged belt drive. Includes assortment of 1 each fine, medium and coarse aluminum-oxide sanding belts. Commercial-duty motor operates on 110-120-v., 60-c. AC. 10-ft. 3-wire cord, adapter. UL listed (Industrial Standards). See guarantee at left.

99 KT 2267C—Shipping weight 18 pounds. \$5 monthly. Cash \$79.99

CRAFTSMAN 3-inch Belt Sander . . motor develops a full ¾ HP



\$41⁹⁹

Excellent for cabinet work, boat or auto repair and refinishing. Large 3x21-in. belt gives you 14 sq. in. of sanding surface. Sands wood, metal, stone, plastic. For dust-free sanding use attachment 9 KT 22595 at right. Sands flush to vertical surface.

No-load belt speed 1300 feet per minute. Dust-shielded, bronze, sleeve-bearings are oil-impregnated. Polished aluminum alloy housing. Included are 3 aluminum oxide sanding belts: 1 fine, 1 medium, 1 coarse. 10-ft. 3-wire cord, adapter. 110-120-v., 60-c. AC only. UL listed (Ind. Stds.). See guarantee above.

Shipping weight 11 pounds.
99 KT 2259C \$41.99

Microlon® nylon Web Finishing Belt. For sander 99 KT 2259C above. 3x21 inches long.
9 KT 22271—Fine
9 KT 22272—Medium
9 KT 22273—Coarse
Shpg. wt. each 7 oz. . . . Each \$1.59



Belt Sander Accessories

1 Carrying Case. For 4-in. sanders above. Storage space for sanding belts. Clips in the lid to hold power cord. Enamel finish. 2 hasps. 20x9x10 inches.

9 KT 1466—Shipping wt. 14 lbs. \$6.99

For 3-in. Sander at left.

9 KT 1476—Shpg. wt. 9 lbs. 7 oz. 5.99

2 6-ft. Vacuum Attachment with Adapter. One end fits sander, the other end fitted for CRAFTSMAN Home-n-Shop Vac, most other tank-type shop, household vacs.

For sander 99 KT 2259C at left.

9 KT 22595—Shpg. wt. 1 lb. 4 oz. \$8.99

For sander 99 KT 2262C at left above.

9 KT 22605—Shpg. wt. 1 lb. 4 oz. 8.99

Microlon® Nylon Web Finishing Belts. For sanders above, other 4-in. sanders. Silicon-carbide grit. Cloth backed. 4x24 in.

9 KT 22261—Fine. Shpg. wt. 7 oz. \$2.39

9 KT 22262—Medium. Shpg. wt. 7 oz. 2.39

9 KT 22263—Coarse. Shpg. wt. 7 oz. 2.39



CRAFTSMAN Machinists' Vises

REG. U.S. PAT. OFF.
Malleable Iron Castings... Unconditionally Guaranteed*



\$36.99 3 1/2-inch jaw size

Heavy-duty malleable iron castings. Replaceable hardened tool steel jaw faces are pinned to castings for a precision tongue and groove fit. No screw heads in work face. Self-lubricating graphite bronze bearings in front of jaws bear all the thrust of the steel screw head.

Steel beam protects screw... keeps out dust and dirt. Steel ball-ends of handle are forged right from handle stock... so handle can't loosen. Heavily reinforced at all points of strain. Meets Federal Specifications GGG-V-0041C.


Catalog Number	Jaw size	Opens to	Shipping weight	Price
99 KT 5182K	3 1/2 in.	5 in.	32 lbs.	\$36.99
99 KT 5183L	4 in.	6 in.	42 lbs.	44.99
99 KT 5184L	4 1/2 in.	7 in.	45 lbs.	54.99



Swivel-base Kits

Convert stationary-base vise to swivel-base vise. Swivels 360°. Gear-like lock-bolt locks tight. Includes: swivel base, lock-bolt, nut and handle, center bolt, washer, spacer, plug for 1 hole. Heavy-duty construction.

Catalog Number	Fits vise	Shpg. wt. lbs. oz.	Price
9 KT 5185	99KT5182K	6 9	\$7.99
9 KT 5186	99KT5183L 99KT5184L	7 14	8.99

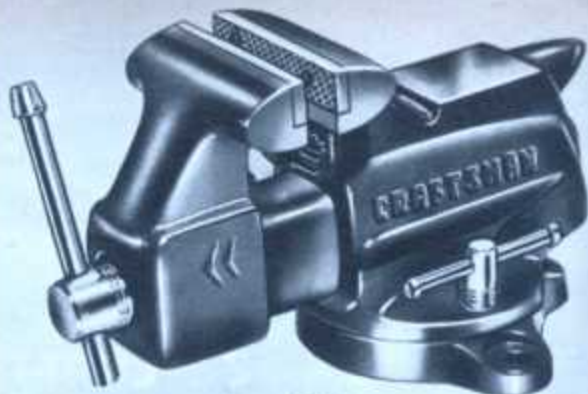

CRAFTSMAN Bench Vises \$12.99

Beam encloses screw... can't clog 2 1/2-inch jaw

Heavy-duty steel channel. Jaws can't wobble sideways or up and down. Convenient, built-in pipe jaws. Slanted swivel locking lever, angled away from vise. Vise swivels 165° and locks tight.

Screw handle tapered ends forged from handle stock... can't come loose. Zinc-plated handle, screw, lock nut. Fast-acting, Acme-threaded steel screw seated in replaceable malleable iron nut... stronger than ordinary vises. Screw protected by channel beam from chips or filings—can't clog. Extra large anvil, anvil horn.

Vise body is reinforced at points of strain. Hardened and tempered replaceable jaw faces. Red finish.

Catalog Number	Jaw size	Opens to	Holds pipe	Shipping weight	Price
99 KT 5180C	3 1/2 in.	4 in.	1/2 to 1 1/4 in.	19 lbs.	\$12.99
99 KT 5181L	5 in.	6 in.	1/2 to 1 1/2 in.	42 lbs.	21.99

Low-priced Utility Vise

\$5.99

Perfect for the home workshop or small industrial shop



Strong, cast semi-steel body. Handle, screw and lock nut nickel-plated for long, rust-free service. 3 1/2-inch jaws open to 3 inches. Jaw faces replaceable. Built-in pipe jaws take 1/4 to 1-inch diameter pipe. Base swivels 165°... locks securely in any position.
9 KT 5177—Shipping weight 11 pounds... \$5.99

Heavy-duty Swivel-base Vise with 4-inch jaws

\$26.99

Far stronger than homeshop or bench vises above... perfect for continuous use for mechanics, or shop workers. Swivel base attaches securely with gear-like lock bolt. Base can be removed for stationary use. Swivels 360° and locks in any position. 4-in. jaws open to 5 in. Jaw depth is 3 1/4 in... designed to take larger loads... heavier material. Big, heavy-duty, 3/4-in. diameter Acme threaded screw is completely enclosed in a heavy steel channel—no chips or dirt can get inside screw mechanism. Meets Fed. Specs. GGG-V-0041.

99 KT 5177K—Wt. 31 lbs... \$26.99



*UNCONDITIONAL GUARANTEE: If casting breaks return it and it will be replaced free of charge.



CRAFTSMAN Clamp Vise

1 Clamps securely to work benches up to 2 1/4 inches thick. Ideal for servicemen's auxiliary vise or for home workshops.

2 1/4 inch wide jaws open to 2 1/4 inches. Has front jaw guides and plated screw handle.

Shpg. wt. 3 lbs. 10 oz.
9 KT 5246... \$2.99

Woodworkers' Vises for on-job and shop use

2 CRAFTSMAN portable Woodworker's Vise. Easily carried in your tool box for on-the-job use. "L" jaws are perfect for clamping doors upright to bench for planing.

Vise's 5 1/2 x 5 1/4-inch aluminum jaws open to full 2 1/4 inches. Holes for mounting wood faces.

Securely clamps to benches from 1/4 inch to 2 1/4 inches in thickness. Holds work in either vertical or horizontal position.

Shpg. wt. 2 lbs. 1 oz... \$3.79
9 KT 5202—Wt. 2 lbs. 1 oz... \$3.79

3 Woodworker's Bench Vise. Clamps tightly to hold work steady. Ideal for carpenters, cabinetmakers, etc.

Fits any benches up to 2 1/4 inches thick. 2 1/4 x 6 1/2-inch jaws open to 4 1/2 inches. Holes in jaw for mounting wood faces. Steel handle.

Shpg. wt. 5 lbs. 15 oz.
9 KT 5187... \$4.99

CRAFTSMAN Woodworkers' Vise

4 Just turn hardwood handle counterclockwise... front jaw pulls open for "free" sliding. Push jaw closed... quick clockwise turn of continuous-thread screw clamps work tightly. It can't slip.

Retractable stop in front jaw. The jaws are drilled for mounting wood faces. Steel guide rods with drag bar keep jaws aligned. Jaws are 4x10 inches. They open to full 12 inches. Mounting is easy... lugs in backjaw. Template included. Meets Federal Specifications GGG-V-0045.

99 KT 5189K—Shipping weight 37 pounds... \$24.99



CRAFTSMAN
REG. U.S. PAT. OFF.

8-piece Propane Torch Kit with fuel-saving control lever

Press lever and you get
a 2300° flame instantly
...release and the flame
goes back to pilot.

8-piece kit
\$9.99

Torch only
\$5.49

*See what you can do with
this 8-piece kit:*

- Remove paint or putty
- Bend metal
- Sweat fittings
- Thaw locks, pipes or bolts
- Solder
- Set tile
- Burn weeds

Here's what you get: Instant-control torch (UL listed) with pencil-flame burner and cylinder, spark lighter, flame spreader, blowtorch burner head, soldering tip, extra fuel cylinder and handy stand. Convenient metal carrying case for storage.

9 KT 54209—Shipping weight 7 lbs. 8 oz. \$9.99

Torch only. With pencil-flame burner and cylinder.
9 KT 54201—Shipping weight 3 pounds. 5.49



Propane torch accessories

1 Replacement Propane Cylinder. For torch 9 KT 54201 at left. Shipping weight 2 pounds 1 ounce.
9 KT 5491 Each \$1.15

2 Flame Spreader. For burner head 9 KT 5394 listed below. Also for former burner head 9-5371.
9 KT 5417—Shipping weight 3 ounces. 99c

3 Blow-torch Burner Head. Standard size. Fits all CRAFTSMAN and Sears propane torches. Ideal for conventional repair work and thawing jobs.
9 KT 5394—Shipping weight 3 ounces. \$1.69

Pencil-flame Burner Head. (Not shown.) Fits all CRAFTSMAN and Sears propane torches.
9 KT 5416—Shipping weight 3 ounces. \$1.79

4 Soldering Tips. For use with torch 9 KT 54201 at left. Also fit former torch 9-5420.

9 KT 5418— $\frac{1}{8}$ -inch diameter Tip. Wt. 5 oz. \$1.89

9 KT 5433— $\frac{3}{16}$ -inch diameter Tip. Wt. 3 oz. 1.59

5 Heavy-duty 1-inch diameter Burner Head. Fits all CRAFTSMAN and Sears propane torches. Excellent for big-soldering repair projects, thawing jobs.
9 KT 53941—Shipping weight 12 ounces. \$3.29

6 Spark Lighter. Safety cap is included.
9 KT 5440—Shipping weight 4 ounces. 29c

Spark-lighter Flints for (6). (Not shown.) Pkg. of 6.
9 KT 54405—Shipping weight 2 ounces. Pkg. 39c

7 Point Scraper Attachment. Designed for use with blow-torch head and flame spreader.
9 KT 54205—Shipping weight 9 ounces. 99c



8 CRAFTSMAN Electric Marking Tool. Inscribe names, sizes, identifying codes, numbers, etc. on any material . . . permanently. Marks cannot be erased or torn away.

Make permanent marks on wood, glass, plastic, copper, brass, steel or any hard surface. Adjustable stroke. 7200 strokes per minute. Tungsten carbide tip. 110-120-v., 60-c., 1-amp, AC only. 6-ft. cord.
9 KT 4295-WL 1 lb. \$9.99

9 Steel Letter and Figure Stamp Sets. Mark wood, leather and metal. Sturdy hardened steel faces. In wood box.

Set of alphabet and period. Two sizes.

9 KT 37924— $\frac{1}{8}$ -inch size. Shpg. wt. 1 lb. 12 oz. Set \$5.99

9 KT 37925— $\frac{3}{16}$ -inch size. Shpg. wt. 2 lbs. 11 oz. Set 7.49

Set of 0 to 9 (6 inverts to 9). Two sizes.

9 KT 37912— $\frac{1}{8}$ -inch size. Shpg. wt. 13 oz. Set 2.49

9 KT 37913— $\frac{3}{16}$ -inch size. Shpg. wt. 1 lb. 2 oz. Set 2.99

10 79-pc. Stencil Set. Brass letters interlock. You get: 2 each (A thru P and R, S, T, U, W), 1 each (Q, V, X, Y, Z), 2 each (0 thru 9). 1 each blank beginner, 1 ender, period ender, comma, apostrophe, 2 spacers, 2 periods, dollar sign, cent sign, ampersand. Brush, ink. Meets Fed. Specs. RR-S-714a.

9 KT 37851—1-inch size. Shpg. wt. 1 lb. 2 oz. Set \$5.99

9 KT 37852—2-inch size. Shpg. wt. 2 lbs. 4 oz. Set 9.49



Gasoline Torches

(11 and 12) Both models have 1-quart capacity. Self-lubricating pump, leak-proof mounting. Cast-bronze burner. Automatic check valve. Insulated handle, valve wheel. Removable hook for holding soldering iron. Fast heat.

11 CRAFTSMAN.. Our Best. Seamless tank of solid brass. Metal windshield for better heat generation. Massive 1-piece burner of cast bronze with $\frac{1}{4}$ -in. opening. Gives 2200° F. flame. Wire needle keeps orifice clean automatically. Ridge-steel bottom with lead coating . . . won't slip. Fill from bottom.
Shpg. wt. 4 lbs. 11 oz.
9 KT 55424 \$18.49

12 Economy model. Copper-brazed steel tank. $\frac{1}{4}$ -in. burner opening. Cast bronze burner. Gives 2100° F. flame. With needle valve. Self-cleaning nozzle. Shpg. wt. 4 lbs. 2 oz.
9 KT 55443 \$11.59



Electric Soldering Irons

- 1 CRAFTSMAN 200-watt.** Heavy duty, commercial type . . . for continuous-duty use. Plastic handle, much stronger than wood. Precision-wound element for extra-heavy duty. $\frac{1}{2}$ -inch copper tip. Chrome nickel-plated finish. 120-volt AC-DC. UL listed.
9 KT 53831—Shpg. wt. 1 lb. 15 oz. . . . \$7.99
- 2 Pencil-type.** For technicians in radio, TV, etc. Nichrome element tip heats to 800°F. Rated at 40-watt input at 125 volts. $\frac{1}{8}$ -inch wide copper tip.
Plastic handle. 120-volts. AC-DC. Underwriters Laboratories listed. 8 $\frac{1}{4}$ inches long.
9 KT 5351—Shipping weight 9 ounces. . . \$3.49
- 3 Medium-duty Soldering Iron.** Use for general soldering—light or medium duty; electrical. . . TV, hobby work, ordinary repairs, etc. Has nichrome element.
Hardwood handle. Chrome nickel-plated finish. 120-volt AC-DC. UL listed.
9 KT 53792—100-watt. Wt. 14 oz. . . . \$2.69
9 KT 54081—75-watt. Wt. 12 oz. . . . 1.99

No Money Down on anything Sears sells

SEE PAGE 96 FOR DETAILS



Now . . Click-Set Dial controls heat in CRAFTSMAN 2-heat Soldering Gun

REG. U.S. PAT. OFF.

Set LO or HI for heat needed . . turn on or off with trigger switch. New design . . fits your hand

Kit with 100-130-watt gun **\$7.99**

New design of this gun's high-impact plastic housing gives you ideal handling balance . . full control of the tool at all times. Extra-long, rigid, slender tip reaches tight spots. Tip is first plated with copper, then with gold to make it non-corrosive. De-solder as well as solder with this gun. 110-120 volt, 60-cycle AC. With 6-foot cord. UL listed.

Kit with 100-130-watt Gun, (9 KT 5280 below). 3 tips for handling all soldering jobs. Solder and case. 9 KT 52803—Shipping wt. 3 lbs. 12 oz. . . Kit \$7.99

100-130-watt Gun, LO heat for delicate work such as jewelry, TV soldering, HI for general work.
9 KT 5280—Shipping weight 3 lbs. 4 oz. . . \$5.69
9 KT 52823—Light-duty Tip, Shpg. wt. 3 oz. . . 49c
9 KT 52805—Plastic-cutting Tip, Wt. 3 oz. . . 49c

Kit with 150-200-watt gun **\$11.79**


Kit with 150-200-watt Gun, (9 KT 5281 listed below). Kit includes four soldering tips for proper handling of different types of soldering jobs. Includes coil of solder and carrying case.

9 KT 52813—Shpg. wt. 4 lbs. 9 oz. . . Kit \$11.79

150-200-watt Soldering Gun, LO heat (150 watts) for electronics work, radio and small appliance repair work, etc. HI-heat (200 watts) for general soldering work requiring higher heat than is available from 9 KT 5280 described at left.

9 KT 5281—Shipping weight 2 lbs. 5 oz. . . \$8.99
9 KT 52815—Heavy-duty Tip for above, Wt. 3 oz. 49c
9 KT 52816—Plastic-cutting Tip, Wt. 3 oz. . . 49c

Heat-seal Tip. Use with either gun on this page.
9 KT 52821—Shipping weight 3 ounces. . . 49c

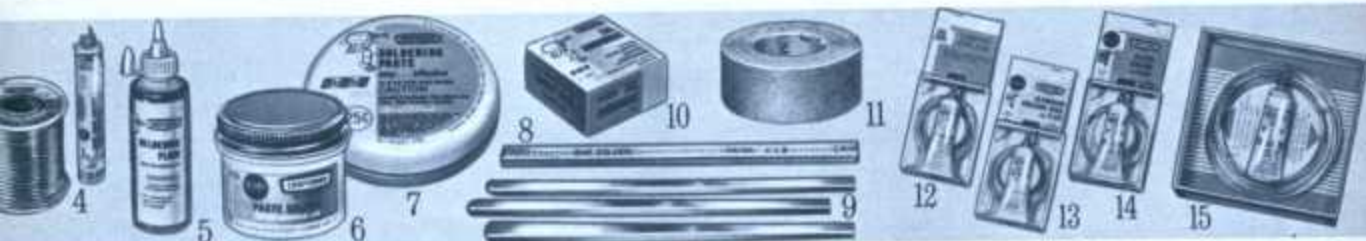

Use the right Solder and Soldering Accessories, Supplies

4 CRAFTSMAN Wire Solder. Meets Fed. Specs. QQ-S-571d. Acid, resin-core solders have flux in core . . . need no paste. (See % of tin, lead, table below.)

Cut. No.	Quantity	Tin/Lead	Wt.	Each
9KT80531	1-lb. spool	40/60	1 lb. 3 oz.	\$1.99
9KT80541	1-lb. spool	50/50	1 lb. 3 oz.	\$1.99

Acid Core Solder. For general use only.
9KT80791—10-ft. coil 40/60 . . . 5 oz. . . 69c
9KT80511—1-lb. spool 40/60 1 lb. 3 oz. \$1.99

Resin Core Solder. For electrical work.
9KT80781—10-ft. coil 40/60 . . . 5 oz. . . 69c
9KT80521—1-lb. spool 40/60 1 lb. 3 oz. \$1.99
9KT80891—10-ft. coil 60/40* . . . 4 oz. . . 69c

*For printed circuits, fine work.

5 CRAFTSMAN Soldering Fluid. For all metals except aluminum. Use as flux. 6-oz. bottle. Shipping weight 12 ounces.
9 KT 8073 39c

6 CRAFTSMAN Paste Solder. Flux and cleaner in one. . . 50% tin and 50% lead. Meets Federal Specs. QQ-S-571d. 8-oz. jar. Shipping weight 12 ounces.
9 KT 8081 \$1.99

7 Soldering Paste. Use for most metals except aluminum. Use it as flux. Comes in $\frac{1}{4}$ -lb. can.
9 KT 8075—Shpg. wt. 8 oz. . . 25c

8 Extruded Bar Solder. Requires flux. 1-pound bar. Meets Fed. Spec. QQ-S-571d. Wt. 1 lb. 3 oz.
9 KT 8057—40% tin 60% lead. \$1.99
9 KT 8058—50% tin 50% lead. 2.09

9 Aluminum Solder. Needs no flux. Pkg. of three 2-oz. rods.
9 KT 80972—Wt. 10 oz. . . Pkg. \$1.09
9 KT 8071 Package 25c

10 CRAFTSMAN Sol Ammoniac Solid. 4 ounces. Shpg. wt. 7 oz.
9 KT 8071 Package 25c


11 Abrasive Roll. Alum. oxide. 120 grit. $1\frac{1}{4}$ in. x 10 yards.
9 KT 6769—Shpg. wt. 9 oz. . . \$1.99

12 Stainless steel Solder, Flux. Approximately 100 inches long.
9 KT 80992—Shpg. wt. 5 oz. . . \$1.29

13 Aluminum Brazing Alloy, flux. Approximately 90 inches long.
9 KT 80994—Shpg. wt. 5 oz. . . \$1.29

14 Silver Solder, flux. Approximately 60 inches long.
9 KT 80993—Shpg. wt. 5 oz. . . \$1.29

15 CRAFTSMAN Silver Solder Kit. Contains 45% silver.
9 KT 2032—Wt. 8 oz. . . Kit \$2.99

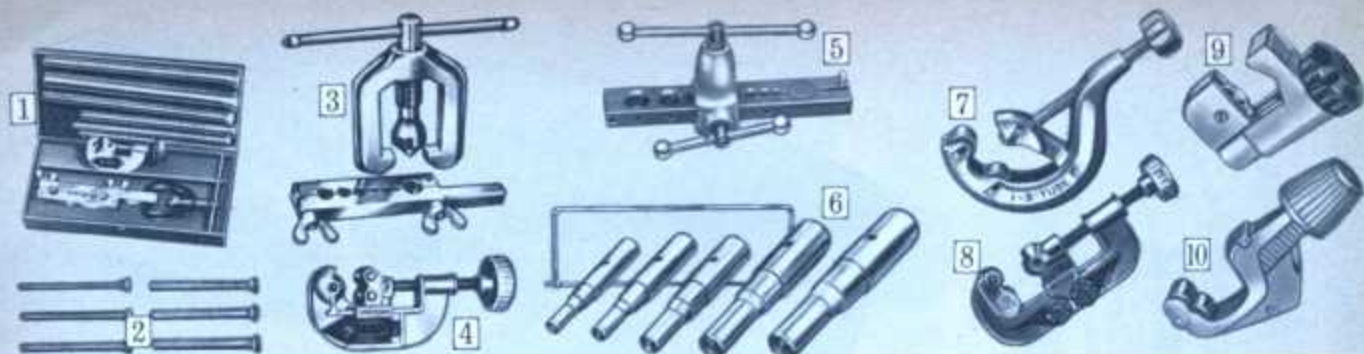

Cut, bend, flare and join tubing accurately with **CRAFTSMAN** Flaring or Swaging Tool Sets

1 9-piece Flaring Tool Set. Handles copper, aluminum, brass... thin wall tubing. Includes flaring tool (9 KT 55371); 6-pc. bender set (9 KT 55411); cutter (9 KT 5533). These items listed separately below and at right. Comes in convenient metal storage box.
9 KT 55271—Shpg. wt. 7 lbs. 14 oz. \$9.99

2 6-piece Tube Bending Set. For tubing $\frac{1}{4}$ to $\frac{3}{4}$ -inch outside diameters. Tempered, spring-steel tubes, flared ends. Cadmium plated. Meets Federal Specifications. GGG-B-191a, Type I, class 2, style A.
9 KT 55411—Shpg. wt. 2 lbs. 2 oz. Set \$2.49

3 Flaring Tool. For 7 sizes: $\frac{3}{16}$ to $\frac{3}{4}$ -inch O.D. Yoke, swivel cone, slide bar handle. Meets Federal Specifications GGG-C-451, Type I, class 2, style A.
9 KT 55371—Shpg. wt. 2 lbs. 14 oz. \$4.59

4 Tubing Cutter. Tough, alloy steel wheel, 2 facing rollers. Easy-grip feed knob. Cuts tubing up to 1 inch diameter. Slide-lock safety reamers.
9 KT 5533—Shpg. wt. 12 oz. \$1.99

5 Extra-heavy-duty Flaring Tool. 8 sizes: for $\frac{1}{8}$ to $\frac{3}{4}$ -inch O.D. Rigid, ductile iron frame. Hardened-steel die bar and handle. Spring-loaded handles. Plunger centers tool. Meets Fed. Specs. GGG-F-451 Type I, class 2, style A.
9 KT 55481—Shpg. wt. 3 lbs. \$11.49

6 Swage Set. For $\frac{3}{16}$ to $\frac{3}{4}$ -inch O.D. tubing. Join tubing of same diameter without couplings.
9 KT 5520—Wt. 1 lb. 10 oz. \$6.59

7 Tubing Cutter. For 1 to $\frac{3}{4}$ -inch tubing (outside diameter). Aluminum frame... lightweight with thin cutting wheel to reduce burrs. Spring release constantly adjusts to pipe size. Ideal for copper, brass, aluminum... other thin wall tubing. Deburrer polishes as you cut for a finished end. Shipping weight 2 lbs. 14 oz.
9 KT 55387 \$12.99

8 Tubing Cutter. For $\frac{1}{4}$ to $1\frac{1}{4}$ -inch tubing (outside diameter). Cuts with minimum pressure and without distortion. Thin wheel reduces burrs. Strong, rigid zinc die cast frame gives dependable service. Shipping weight 1 lb. 6 oz.
9 KT 5528 \$3.99

9 Close-quarter Tubing Cutter. Capacity from $\frac{1}{4}$ to $\frac{1}{2}$ -inch tubing (outside diameter). Made to get into small corners and areas where standard cutters cannot operate. Needs only $1\frac{1}{2}$ -inch clearance. Steel cutting wheel.
9 KT 55460—Wt. 6 oz. \$1.49

10 Heavy-duty Tubing Cutter. 2 alloy steel cutting wheels; 2 facing rollers cut cleanly with little burring. Capacity up to $1\frac{1}{4}$ -in. Slide-lock safety reamer and large, easy-to-grip feed knob. Enclosed feed design with flare groove rollers, retractable reamer.
9 KT 5531—Wt. 1 lb. \$2.99

Professional-quality Pipe Wrenches

11 CRAFTSMAN Heavy Duty. American made. Rugged professional quality. One-piece frame, housing and handle. Replaceable forged-steel jaws... milled teeth. Exceed Federal Specs. GGG-W-651c, Type II, Class A.

Catalog Number	Size, in.	Takes Pipe	Shpg. wt. lbs. oz.	Price
9 KT 55670	8	$\frac{3}{4}$ in.	1 2	\$2.49
9 KT 55671	10	1 in.	2 2	3.19
9 KT 55672	14	$1\frac{1}{2}$ in.	3 10	4.69
9 KT 55673	18	2 in.	5 10	6.49
9 KT 55674	24	$2\frac{1}{2}$ in.	9 13	10.49

Heavy-duty Pipe Wrench (not shown). Same pattern as above. From Japan.

10-inch size, 1-inch capacity.
9 KT 30851—Wt. 1 lb. 12 oz. \$2.39

14-inch size, $1\frac{1}{2}$ -inch capacity.
9 KT 30852—Wt. 3 lbs. 6 oz. \$3.39


12 Stillson-pattern All-forged. Made in Japan to Sears rigid specifications. Steel jaws... milled teeth—pitched to force work into jaws, not out. Forged-steel handle and jaws.

Catalog Number	Size, in.	Takes Pipe	Shpg. wt. lbs. oz.	Price
9 KT 30881	8	$\frac{3}{4}$ in.	1 3	\$1.29
9 KT 30882	10	1 in.	1 7	1.59
9 KT 30883	14	$1\frac{1}{2}$ in.	2 9	2.49
9 KT 30884	18	2 in.	4 3	3.59

13 CRAFTSMAN Ratcheting and Reversing Chain Pipe Wrench. Reverses or takes new bite without removing wrench from work. Ideal for use in tight places. Fits any pipe, conduit, or irregular shaped material—even change spin-type oil filters. Drop-forged steel body... nickel-chrome plated, 12-inch handle; 15-inch chain. 2 sets of teeth. Capacity $\frac{1}{4}$ to 4 inches. In plastic pouch.
9 KT 55713—Wt. 2 lbs. 2 oz. \$4.79

No Money Down on anything Sears sells
... See page 96

Quality Plumbing Accessories and Tools

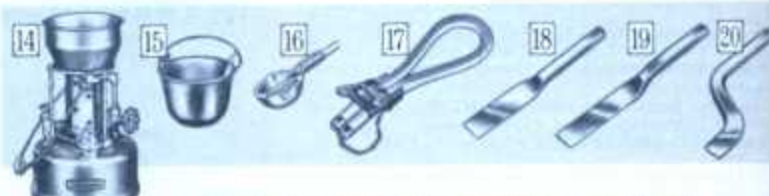

14 CRAFTSMAN Plumber's Gasoline Furnace. Melts 20 lbs. of lead in 6 minutes. Concentrated heat at 2250° F. One-gal. steel tank. Brass pump has automatic check. Valve assembly coil replaceable as unit. Copper brazed joints.
9 KT 5428—Shipping weight 13 pounds \$29.99

15 Cast-iron Melting Pot. Use with (14) above. Top diam. $4\frac{1}{2}$ in. Holds about 12 lbs.
9 KT 5435—Shipping weight 2 lbs. 14 oz. \$1.99

16 Cast-iron Pouring Ladle. 10-in. handle. Strainer screens impurities. Holds $1\frac{1}{2}$ lbs.
9 KT 5436—Shipping weight 1 lb. 14 oz. \$1.29

17 Asbestos Joint Runner. Cast iron spring clamp. For 2, 4, 5 or 6-inch pipe. With metal tip to prevent raveling. $\frac{1}{2}$ -in. diameter.
9 KT 5439—Shipping weight 1 lb. 14 oz. \$2.69

18 Offset Yarning Iron. $\frac{1}{2}$ x8-in. steel stock. Chrome-vanadium steel for long life. 4-in. bit.
9 KT 43275—Shpg. wt. 9 oz. \$1.39

19 Right and Left-hand Caulking Irons. Forged steel for extra strength. $\frac{1}{2}$ x6 $\frac{1}{2}$ -in. stock. Vanadium alloy steel.
9 KT 43325—Right, Shpg. wt. 9 oz. \$1.39
9 KT 43345—Left, Shpg. wt. 9 oz. 1.39

20 Caulking Irons. Forged chrome-vanadium steel. Stronger and more durable than die-cast irons. $\frac{1}{2}$ -in. wide stock.

Catalog No.	Type	Length	Wt.	Price
9 KT 43305	Straight	7 in.	9 oz.	\$1.39
9 KT 43285	Out-concave	6 $\frac{1}{2}$ in.	8 oz.	1.39
9 KT 43295	In-concave	6 $\frac{1}{2}$ in.	8 oz.	1.39



Professional quality Plumbing Tools and Wrenches

21 Angle Tapered Seal Wrench. Designed to remove or insert all types of faucet seats. Makes easier work of a tough job. Hardened steel is cadmium plated to resist rust. Wrench is "L" shaped for just the right angle.

One leg is 6 inches long, tapered at the end to a $\frac{3}{16}$ -inch square. Other leg is 7 inches long, tapered at the end to $\frac{3}{16}$ -inch square. $\frac{1}{2}$ -inch shank diameter.
9 KT 55682—Shipping weight 13 oz. 99c

22 CRAFTSMAN Basin Wrench. Self-adjusting forged steel jaws. Extra-long handle makes faucet nuts easier to remove. 11-in. handle is square for firm wrench grip.
9 KT 55683—Shpg. wt. 2 lbs. 12 oz. \$1.99

23 Small Strap Wrench. Cast iron head, 6-inch size. Breaking strength, 1000 lbs. $\frac{1}{4}$ to 1 inch capacity. Sturdy strap.
9 KT 55701—Shipping weight 10 oz. \$1.99

24 Large Strap Wrench. Cast iron head, 12-inch steel piping handle. Breaking strength, 3500 lbs. $\frac{1}{4}$ to 2-inch capacity.
9 KT 55702—Shpg. wt. 1 lb. 10 oz. \$4.49

25 Adjustable Slip and Lock Nut Wrench. Shaped for slip-nuts on "P" or "S" sink traps. Also for locknuts, spudnuts and bonnet caps. Jaw adjusts from $\frac{1}{4}$ to 3 inches. Cadmium-plated, 10 $\frac{1}{2}$ inches long.
9 KT 55685—Shpg. wt. 1 lb. 8 oz. \$1.99



CRAFTSMAN Pipe Threader

REG. U.S. PAT. OFF.

Chip ejectors help eliminate clog

Ratchet Solid-Die Sets. Double-thread throats give you easier starting because starting threads are extra fine. Ratchet action pumps dies on pipe. Double pawls reduce lost motion 50%. Self-feeding, inserted tool steel cutters, cuts right-hand National pipe threads (NPT). Solid cast guide bushings. $\frac{3}{4}$ -pint thread cutting oil. Metal carrying rack with all sets except 99KT5386C. Designed for professional use.

With five 2x2-in. For $\frac{1}{4}$, $\frac{3}{8}$, $\frac{1}{2}$, $\frac{3}{4}$, 1 in.
99 KT 5385C—Wt. 14 lbs. Set \$35.59

With four 2 $\frac{1}{2}$ x2 $\frac{1}{2}$ -in. $\frac{3}{8}$, $\frac{1}{2}$, 1, 1 $\frac{1}{4}$ in.
99 KT 5390C—Wt. 14 lbs. Set \$34.79

With three 2x2-in. For $\frac{1}{4}$, $\frac{3}{8}$, 1-in. pipe.
99 KT 5395C—Wt. 11 lbs. Set \$27.99

With three 4x4-in. For 1 $\frac{1}{4}$, 1 $\frac{3}{4}$, 2 in.
99 KT 5386C—Wt. 16 lbs. Set \$32.50



Pipe-Threader. Solid 2-die set. Professional quality. Double-thread throats give easier starting with extra-fine threads. Self-feeding inserted tool steel cutters. Solid guide bushings (as 9KT5457F below). Threads $\frac{1}{4}$ and $\frac{3}{8}$ -in. pipe. 2x2-in. dies. Cuts National pipe threads (NPT). $\frac{3}{4}$ -pint thread cutting oil. Shipping weight 7 lbs.
9 KT 5524, Set \$14.49



Guide Bushings. For solid die stocks in sets above. Also for most other standard makes. (9KT5457F not shown, see illustration in solid 2-die set above). State catalog number, then size of bushing to correspond with die.

Shipping weight each 7 ounces.

Catalog No.	Size, in. (bore size)	Fits sets	Each
9 KT 5457F	$\frac{1}{4}$, $\frac{3}{8}$, $\frac{1}{2}$, $\frac{3}{4}$, 1	9KT5524, 9-5387, 9-5390, 9-5395	\$1.39
9 KT 5458F	$\frac{1}{4}$, $\frac{3}{8}$, $\frac{1}{2}$, $\frac{3}{4}$, 1	99KT5385C, 99KT5395C	1.39
9 KT 5459F	$\frac{1}{4}$, $\frac{3}{8}$, $\frac{1}{2}$, $\frac{3}{4}$, 1	99KT5390C	1.69
9 KT 5454F	$\frac{1}{4}$, $\frac{3}{8}$, 1, 1 $\frac{1}{4}$, 1 $\frac{3}{4}$, 2	99KT5386C	2.39

Solid Dies. Top professional quality for lasting sharpness and long wear. For use with solid die stocks in sets above; also most other standard makes. Double-thread throats . . . starting threads are finer for extra-easy starting. State catalog number, then size.

Catalog No.	Size, in. (bore size)	Fits stock	Shpg. wt.	Each
9 KT 5510F	$\frac{1}{4}$, $\frac{3}{8}$, $\frac{1}{2}$, $\frac{3}{4}$, 1	2x2 in.	3 oz.	\$4.69
9 KT 5470F	$\frac{1}{4}$, $\frac{3}{8}$, $\frac{1}{2}$, $\frac{3}{4}$, 1, 1 $\frac{1}{4}$	2 $\frac{1}{2}$ x2 $\frac{1}{2}$ in.	13 oz.	5.29
9 KT 5472F	$\frac{1}{4}$, $\frac{3}{8}$, 1, 1 $\frac{1}{4}$, 1 $\frac{3}{4}$, 2	4x4 in.	2 lbs. 2 oz.	7.59

You can equip your entire workshop from this catalog



Taps, Reamers, Cutters, Vises

1 Taper-style Pipe Taps. Made of Kromedge® steel. Stays sharp MUCH longer than ordinary steel! Cut right hand. National pipe threads (NPT). Tool steel; heat-treated and hardened. Self-threading. Professional quality. Meet Federal Specifications, GGG-T-60.

Catalog Number	Size, in.	Thrm.	Shpg. wt.	Each
9KT54531	$\frac{1}{4}$	22	3 oz.	79c
9KT54532	$\frac{3}{8}$	18	4 oz.	99c
9KT54533	$\frac{1}{2}$	18	5 oz.	\$1.29
9KT54534	$\frac{3}{4}$	14	6 oz.	2.09
9KT54535	1	14	10 oz.	3.29
9KT54536	1 $\frac{1}{2}$	11	1 lb.	4.79

2 CRAFTSMAN Burring Reamers. Spiral flutes. Tapered square shank for bit brace. Tool steel.

For pipe $\frac{1}{4}$ to 1 $\frac{1}{4}$ in.
9 KT 5513—Wt. 10 oz. \$3.59
For pipe $\frac{1}{4}$ to 2 in.
9 KT 5514—Wt. 1 lb. 5 oz. 5.39

3 CRAFTSMAN Pipe Cutter. Heavy duty professional quality. Alloy-steel cutting wheel, 2 rollers. No 2 size; cuts pipe $\frac{1}{4}$ to 2 in.

9 KT 55072—Wt. 6 lbs. \$18.99
Extra Cutting Wheel for Cutter 9 KT 55072 above.
9 KT 55033—Wt. 2 oz. \$1.29

4 Saunders-type Pipe Cutter. Has 1 thin tool-steel cutting wheel; 2 hardened steel rollers.

No. 1. Cuts pipe $\frac{1}{4}$ to 1 in.
9 KT 55021—Wt. 3 lbs. 7 oz. \$6.99
No. 2. Cuts pipe $\frac{1}{4}$ to 2 in.
9 KT 55022—Wt. 6 lbs. 13 oz. 10.49

Extra Cutting Wheels. No. 1 fits 9 KT 55021 above; and No. 2 fits 9 KT 55022, former 9-5507.

9 KT 55031—No. 1. Wt. 2 oz. \$1.29
9 KT 55032—No. 2. Wt. 2 oz. 1.29

5 Chain-type Pipe Vise. Hardened steel chain with 8000-lb. breaking strength. Ductile iron frame. Jaw. Takes pipe to 3 in.
9 KT 5557—Wt. 5 lbs. 6 oz. \$8.79

Pipe Vises

Spring-release type **\$15.99**


Quick-action spring-release vise with $\frac{1}{4}$ to 2 $\frac{1}{4}$ -inch capacity. Adjusts instantly to pipe. Yoke, base are malleable alloy. Top and bottom jaws tool steel. Three separate top jaws for 3 times longer wear. Vertical bendable on each side.

Shipping weight 16 pounds.
99 KT 5555C, \$15.99

Pipe Vises. Malleable iron frame, 3 replaceable alloy steel jaws. Reversible, automatic lock.

$\frac{1}{4}$ to 1 $\frac{1}{2}$ -inch capacity.
9 KT 5551—Wt. 4 lbs. 7 oz. \$5.99

$\frac{1}{4}$ to 2 $\frac{1}{2}$ -inch capacity.
9 KT 5553C—Shpg. wt. 10 lbs. 11.99

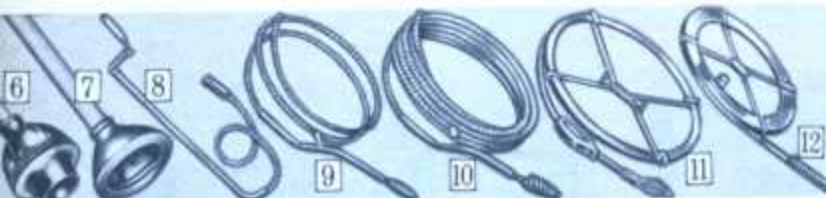

6 Two-way Rubber Force Cup. Super suction action. Use with bottom extended (as shown) for toilets. Can be tucked in bottom for sinks. Ribbed inside and outside for extra strength . . . long service. Wt. 1 lb. 10 oz.

9 KT 5525, \$1.79

7 Rubber Force Cup. For use in sinks, toilets, etc. 24-in. wood handle; threaded 5 $\frac{1}{4}$ -in. cup, ribbed interior.

9 KT 5526—Wt. 1 lb. 8 oz. 49c

8 Closet Auger. Flexible coil of zinc-plated spring steel; slides in steel tube. Steel crank; wood handle. Removable wire cork-screw. Has rubber guard. 3 $\frac{1}{2}$ feet long overall. Shpg. wt. 3 lbs.

99 KT 5534C, \$2.49

9 Coil-type Cleanout Auger. Turn of handle twists wire hook. Zinc-plated coil spring. $\frac{1}{4}$ -in. diameter, 6 feet long. Shpg. wt. 1 lb. 2 oz.

9 KT 5530, \$1.49

10 Drain and Trap Auger. Extra flexible. Sharp hook breaks through tough stoppages to open drain. $\frac{1}{4}$ -in. coiled spring steel. Auger handle grips spring at any point. Zinc-plated to resist rust. Choice of 3 sizes below.

15 ft. Shpg. wt. 4 lbs.
9 KT 55361, Each \$2.99

25 ft. Shpg. wt. 6 lbs. 2 oz.
9 KT 55362, Each \$4.39

50 ft. Shpg. wt. 12 lbs.
9 KT 55345, Each 6.99

11 Flat Sewer Rods. Spring steel. $\frac{1}{4}$ in. thick. Revolving spear point clears quickly. Special sliding handle grips rod at any point. Steel frame holds rod for compact storage.

50-foot Rod, $\frac{1}{2}$ inch wide.
99 KT 5509C—Wt. 8 lbs. \$7.79

50-foot Rod, $\frac{3}{4}$ in. wide.
99 KT 5539C—Wt. 10 lbs. 9.79

100-ft. Rod, $\frac{1}{2}$ in. wide.
99 KT 5540C—Wt. 18 lbs. 15.99

12 Hook-end Cleanout Auger. Thin, flat clock-spring steel . . . strong, yet flexible. 25 feet long. $\frac{1}{4}$ inch wide. Will not kink. Holder for storage. Wt. 1 lb. 2 oz.

9 KT 5532, \$1.29

Drain Augers

\$24.99

For electric drills

For electric drills. Clear clogged-up plumbing the easy way. Connect auger to $\frac{1}{4}$ or $\frac{1}{2}$ -in. electric drill. Insert spear point in drain opening . . . flip switch. In moments normal stoppages in sink, bathtub or floor drain can be cleared. Drop-head type spear point revolves as it digs. 25 ft. of flexible piano wire goes around sharp bends in sewer line. Rotation is reversible. Stores in steel container. Auger diam. $\frac{1}{4}$ in.

9 KT 1845—Wt. 12 lbs. \$24.99

13 25-ft. Self-storing Drain Auger. $\frac{1}{4}$ -in. wire coil rolls up in steel container. Tumble head with 2 universal joints turns corners—travels down waste pipe rather than up stack. Rotate knob to open drain.

9 KT 55356—Wt. 6 lbs. 2 oz. \$8.79

14 15-ft. Self-storing Drain Auger. $\frac{1}{4}$ -in. spring steel coil rolls up in steel container. Rotate knob to open drain.

9 KT 5547—Wt. 3 lbs. 12 oz. \$4.49



OPEN ADDED

Sears 59

No Money
Down
on anything
Sears sells

SEE PAGE 96
FOR DETAILS



Adhesives for every shop and home purpose

1 Plastic Rubber. Vulcanizes without use of heat. Rubber in putty form . . . molds into any shape. Use it for waterproofing, insulating, caulking . . . repair rubbers, raincoats, etc. Stays elastic. Expands, contracts with temperature changes. 4-oz. tube. Shipping weight 8 oz.

9 KT 8067 Tube 69c

2 Household Cement. For most home and shop jobs. Vinyl base. Mends vinyl plastics, china, glass, ceramics, cloth, paper and leather. Dries clear . . . won't stain. Waterproof—use indoors or out. Dries fast. Hardens with age. 2-oz. tube. Shipping weight 4 oz.

9 KT 8068 Tube 49c

3 Hide Glue. The right glue for cabinet making. Makes a durable wood bonding that's stronger than the wood itself. Also for fabrics, leather, cardboard and other porous materials. In squeeze bottle.

Catalog No.	Size	Shpg. wt.	Each
9 KT 80620	2-ounce	3 ounces	29c
9 KT 80622	4-ounce	8 ounces	49c
9 KT 80623	8-ounce	14 ounces	89c

4 Weatherstrip Adhesive. Adheres to glass, rubber, metal, wood or cloth. Use for auto door gaskets, sponge rubber stripping. 5-oz. tube. 9 KT 8076—Shpg. wt. 8 oz. Tube 59c

5 Stitchless Mender. Mends, patches . . . stops raveling, runs in fabrics. Bonds leather to fabrics. 2-oz. tube. 9 KT 8070—Shpg. wt. 5 oz. Tube 59c

6 Patch All. Solders, seals, patches. For auto, home, shop. No tools, heat or flame needed. Bonds to metal, wood, leather, etc. 5½-oz. tube. 9 KT 8069—Shpg. wt. 10 oz. Tube 69c

7 Styrene Cement. Clear, waterproof liquid. For welding model cars, planes, other polystyrene plastic items. Sets in 5 to 15 min. 1-oz. tube. 9 KT 8050—Shpg. wt. 4 oz. Tube 19c

8 Epoxy Cement. World's strongest cement! Bonds wood, metals, pottery, porous materials, most plastics. Water and shrink-proof. Set of two 1-ounce tubes: (1) resin, (2) hardener. 9 KT 8059—Shpg. wt. 6 oz. . . . Set 59c

9 White Rubber Cement. 4-oz. jar. 9 KT 8077—Shpg. wt. 10 oz. Jar 39c

10 Pliobond®. Bonds fabric to fabric and to leather. 1½-oz. tube. 9 KT 8072—Shpg. wt. 5 oz. Tube 59c

11 Filled Epoxy Cement. *World's strongest.* Patch holes in auto bodies, boats, hard plastics, tile, etc. Can be sanded, drilled, filed.

Set of two tubes: 5-oz. tube of resin and 5-oz. tube of hardener. Shipping weight 1 lb. 1 oz. 9 KT 80605 Set \$1.89

12 Casein Glue. Bonds wood, porous materials. For use outdoors or in humid areas . . . resists water, sets at low temperature. 12-ounce can. Shipping weight 1 lb. 2 oz.

9 KT 8063 Can 79c

13 Contact Cement. For no-clamp bonding of plastic laminates to tables, sinks, cabinets, etc. Bonds porous and non-porous materials to wood, rubber, leather.

Catalog No.	Size	Shipping wt.	Each
9 KT 80651	4 oz.	8 oz.	49c
9 KT 80652	16 oz.	1 lb. 4 oz.	\$1.29
9 KT 80653	1 qt.	2 lbs. 5 oz.	2.09
99 KT 80654C	1 gal.	8 lbs.	6.29

14 Plastic Resin Glue. For furniture, veneering, cabinetmaking. Resists water, won't stain. In can.

Catalog No.	Size	Shipping wt.	Each
9 KT 80661	2½ oz.	8 oz.	39c
9 KT 80662	5 oz.	10 oz.	59c
9 KT 80663	12 oz.	1 lb. 1 oz.	99c

15 Waterproof Glue. Bonds porous materials. For boats, outdoor furniture, etc.

¼-pint can. 9 KT 80641—Wt. 14 oz. Can \$1.19

1-pint can. 9 KT 80642—Wt. 2 lbs. Can . . . 3.19

16 All-purpose White Glue. Sets quickly, dries clear. For mosaic tiles, to repair furniture, dolls, etc.

Catalog No.	Size	Shpg. wt.	Each
9 KT 80611	2-oz.	5 oz.	25c
9 KT 80612	4-oz.	8 oz.	39c
9 KT 80613	8-oz.	14 oz.	69c
9 KT 80614	16-oz.	1 lb. 8 oz.	\$1.19
9 KT 80615	1-qt.	2 lbs. 10 oz.	1.99
99 KT 80616C	1-gal.	11 lbs.	5.19

You can equip a complete workshop from this book. see index, page 96



Lubricants, Rust-preventives . . Belt Dressing and Lock Defroster

17 Silicone Spray. All-around lubricant for rubber, metal and wood. 9 KT 5576—Net wt. 8 oz. Wt. 15 oz. . . . 99c

Rust Preventive Oil. In spray cans. 9 KT 55762—Net wt. 5 oz. Wt. 10 oz. . . . 69c

18 Penetrating Oil. For rusty joints. 9 KT 5593—Net wt. 4 oz. Wt. 7 oz. . . . 35c
9 KT 55931—1-pt. can. Wt. 1 lb. 6 oz. . . . 59c
9 KT 55932—6-oz. spray can. Wt. 11 oz. 79c

19 Non-corrosive Oil. Light-duty for general household use. Net wt. 4 oz. 9 KT 5594—Shipping weight 7 oz. . . . 29c
9 KT 55941—1-qt. Wt. 2 lbs. 7 oz. . . . 89c

Clippers, Shaver Oil. Tube, Net ¼ oz. 9 KT 55745—Shipping weight 4 oz. . . . 29c

Fine Household Oil. In can. Net wt. 4 oz. 9 KT 55943—Shipping weight 8 oz. . . . 35c

20 Rubber Lubricant. Net wt. 8 oz. 9 KT 55942—Shpg. wt. 12 oz. . . . 49c

21 Lock Defroster. Net wt. ¼ oz. 9 KT 55746—Shipping wt. 4 oz. . . . 39c

22 Belt Dressing. Net wt. 4 oz. 9 KT 55944—Shpg. wt. 8 oz. . . . 39c

23 Gear Case Lubricant. Net wt. 4 oz. 9 KT 2593—Shipping wt. 9 oz. . . . 69c

24 Lubrication Kit. 1 vial each: light machine oil, dry and graphite oil. 9 KT 55741—Shpg. wt. 8 oz. . . . Kit 79c

25 Graphite Oil. ¼-oz. net weight. 9 KT 5574—Shpg. wt. 4 oz. . . . 25c

Graphite Powder. ¼-oz. net weight. 9 KT 55742—Shpg. wt. 3 oz. . . . 19c

Dry White Lube. ¼-oz. net weight. 9 KT 55744—Shpg. wt. 3 oz. . . . 19c

Graphite Penetrating Oil. 9 KT 55743—4-oz. net. Wt. 8 oz. . . . 39c

26 1-ounce Silicone Grease Stick. 9 KT 5577—Shpg. wt. 4 oz. . . . 29c



4-piece Set
\$8.19

Our Best CRAFTSMAN Wood Chisels

REG. U.S. PAT. OFF.

Austempered to stay super sharp . . . tough plastic handles take terrific punishment, last much longer than ordinary wood handles.

Here's a chisel that's rugged . . . built to give you long-lasting service. Each 2½-inch blade is precision-made from chrome-vanadium steel, then austempered for maximum toughness and edge-holding quality. Next, blade is precision ground and polished to a mirror-bright finish.

Blade is finally polished, heavily lacquered to resist rust. Tang extends completely into tough plastic handle.

Set of 4 Chisels. Most used sizes: ¼, ½, ¾ and 1 inch. Complete with durable plastic pouch to keep chisels neat and handy.

9 KT 36831—Wt. 1 lb. 8 oz. . . . Set \$8.19

Catalog No.	Width	Shpg. wt.	Each	Catalog No.	Width	Shpg. wt.	Each
9 KT 36840	¼ inch	6 oz.	\$1.99	9 KT 36844	1 inch	8 oz.	\$2.69
9 KT 36842	½ inch	7 oz.	2.29	9 KT 36845	1½ inch	10 oz.	2.99
9 KT 36843	¾ inch	7 oz.	2.49				


All forged alloy steel. Chrome plated. Austempered for toughness. Precision ground bevels and cutting edge. Hexagonal shank. Round head.

Set of 4 Chisels in plastic pouch. ¼, ½, ¾ and 1 inch . . . these are most-used sizes. Lightweight, convenient. (See complete listing of sizes below).

9 KT 3680—Wt. 1 lb. 5 oz. . . . Set \$4.99

Individual Chisels. 2½-inch size is double beveled. Hammer forged. Hold their keen edge . . . withstand punishing blows and side-pull.

Catalog No.	Width	Shpg. wt.	Each
9 KT 36871	¼ in.	3 oz.	\$1.09
9 KT 36872	½ in.	5 oz.	1.29
9 KT 36873	¾ in.	6 oz.	1.49
9 KT 36874	1 in.	11 oz.	1.79
9 KT 36875	1½ in.	1 lb. 1 oz.	2.09
9 KT 36876	2½ in.	1 lb. 4 oz.	2.79

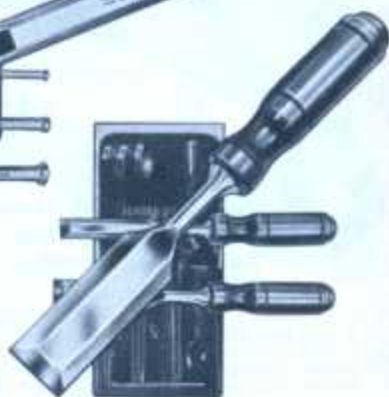


3-piece Chisel Set. Lightweight; well-balanced tang type. Tough plastic handles. Precision-ground cutting edges. Good general-purpose tool.

Three sizes in set: ¼, ½ and 1 in. Come in handy plastic pouch.

Shipping weight 14 ounces.

9 KT 3682 Set \$3.49

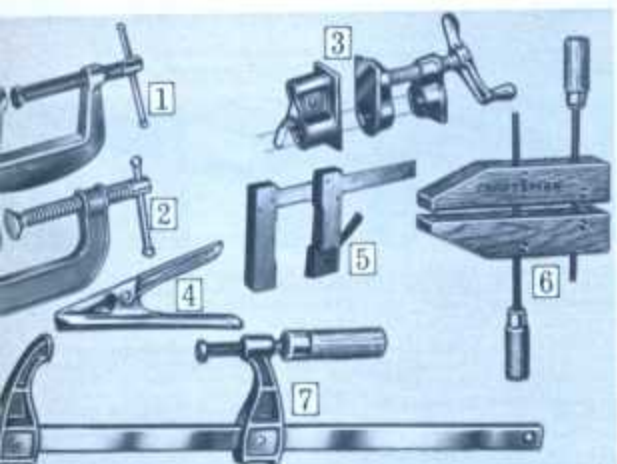

Clamps to make gluing, sawing, welding easy

Aluminum alloy "C" Clamp. Won't rust or warp . . . designed for extra-long life. Very light, strong. Steel w. sliding handle.

Catalog No.	Opens to	Shpg. wt.	Each
9 KT 66701	3 in.	3 oz.	69c
9 KT 66702	2 in.	5 oz.	89c
9 KT 66703	3 in.	10 oz.	\$1.29
9 KT 66704	4 in.	13 oz.	1.99

Standard Malleable-Iron "C" Clamp. Plated steel screw; sliding handle. Has heavy iron frame.

Catalog Number	Opens to	Throat depth, in.	Shpg. wt., lbs. oz.	Price each
9 KT 66671	1 in.	1	4	35c
9 KT 66672	2 in.	1½	7	69c
9 KT 66673	3 in.	1½	15	\$1.09
9 KT 66674	4 in.	2	2	1.69
9 KT 66675	5 in.	2½	8	2.29
9 KT 66676	6 in.	2½	14	2.89
9 KT 66677	8 in.	3	4	3.99

Deep-Throat "C" Clamps (not shown). Made of pearlitic iron . . . 20% stronger than malleable iron!

Catalog Number	Opens to	Throat depth, in.	Shpg. wt., lbs. oz.	Price each
9 KT 66681	1 in.	3	9	69c
9 KT 66682	2½ in.	4½	1	\$1.39
9 KT 66684	4 in.	5	2	1.99

3 Gluing Clamp. Pipe cap fits regular ¾-in. threaded pipe (pipe not incl.). Jaw face 1½x1½ in. Shpg. wt. 2-pc. set, 3 lbs. 3 oz. 9 KT 66674 Set \$2.99

4 Spring Clamps. Heavy-gauge steel. Strong steel spring.

Catalog Number	Opens to	Over-all length	Wt. each	Each
9 KT 66691	1 in.	4 in.	4 oz.	39c
9 KT 66692	2 in.	6 in.	9 oz.	59c
9 KT 66693	3 in.	9 in.	15 oz.	99c

5 Hardwood Clamps. Quick-acting design for easy operation. Non-marring jaw surfaces. Opens to 8 inches. Shpg. wt. 1 lb. 10 oz. 9 KT 66664 Each \$1.79

6 CRAFTSMAN Adjustable Gluing Clamps. Hardwood jaws. Opening to 4 inches.

9 KT 66634—Wt. 2 lbs. 2 oz. Each \$3.69

Opening to 7 inches.

9 KT 66637—Wt. 3 lbs. 4 oz. Each 4.59

Opening to 10 inches.

9 KT 66639—Wt. 5 lbs. 2 oz. Each 5.79

7 Light-service Bar Clamp. 2½-in. jaw grips 24-inch bar.

99 KT 66635—Wt. 3 lbs. . . . Each \$3.49

CRAFTSMAN Cut 'n' Clamp Set

REG. U.S. PAT. OFF.

Makes it easy to get 90° corners on screens, frames, etc.



Complete Set
\$5.99

Just mark frame size . . . clamp . . . then cut. You get perfect 90° corners every time. Gluing, nailing and stapling are easy, corners are stronger because frame pieces fit exactly . . . with no gaps. Holds pieces up to 3 in. wide, guides saw for precise 45° angle cuts. Fits any back or hand saw . . . guides adjust to width of blade. Can be fastened to table or work bench. Full set includes 3 corner clamps and one-miter box corner clamp . . . all of aluminum alloy.

9 KT 66614—Shipping weight 2 pounds 13 ounces. Set \$5.99

9 KT 6661—Miter box 45° Corner Clamp only. Shpg. wt. 1 lb. 2 oz. 1.99

9 KT 6666—Corner Clamp only (3 needed with above clamp). Shpg. wt. 12 oz. Ea. 1.49



8 CRAFTSMAN Axe Stone. Vitrified silicon carbide. One side coarse grit; other side fine. ¾ in. thick. 3-inch diameter. 9 KT 6450—Shpg. wt. 7 oz. 89c

9 Oval Scythe Stone. Vitrified aluminum oxide. 11x1½x¾ in. 9 KT 6445—Shpg. wt. 10 oz. 49c

10 CRAFTSMAN Vitrified File. For mowers, sickles, etc. 14 inches long for easy sharpening. 9 KT 6452—Shpg. wt. 1 lb. 6 oz. . . . \$1.19

11 CRAFTSMAN Pocket Stone. Silicon carbide. Plastic carrying case. Fine grit. 3x¾x¾ inches. 9 KT 6441—Shpg. wt. 2 oz. 29c

12 CRAFTSMAN Combination Sharp-ening Stone. Made of vitrified silicon carbide. Coarse grit on one side and fine grit on the other side.

Catalog No.	Size	Shpg. wt.	Each
9 KT 64400	6x2x¾ in.	12 oz.	\$1.29
9 KT 64401	6x2x1 in.	1 lb.	1.49
9 KT 64402	7x2x1 in.	1 lb.	1.69

13 CRAFTSMAN Tapered Flat Stone. Here's the stone that's perfect for general-purpose sharpening. Made of vitrified silicon carbide abrasive. Measures 9½x1½x¾ inches. 9 KT 6446—Shpg. wt. 7 oz. 49c

No Money Down on anything Sears sells

SEE PAGE 96



Exclusive 3rd
claw pulls
nails from tight
places

1
With tubular
steel handle
\$4.99

Only **CRAFTSMAN** Hammers
have reinforced claws
that will help smother
harmful vibrations

2
steel handle
- 16 oz. head
\$4.39

3
Hickory handle
- 13, 16 oz. head
\$3.49

4
Hickory handle,
leather grip
\$4.99

1 Our best Hammer. Pull nails from tight places thanks to its third claw. Hickory plug inside the tubular steel handle adds tremendous strength... helps cut vibrations. Handle has polished, chrome-plated finish. Head, handle pressure locked. Neoprene covered grip prevents slipping, cuts vibration.

Catalog Number	Head	Claw	Shipping weight	Price
9 KT 3836	16 oz.	Curved	1 lb. 13 oz.	\$4.99
9 KT 3838	13 oz.	Curved	1 lb. 9 oz.	4.99
9 KT 3837	16 oz.	Straight	1 lb. 15 oz.	4.99

2 With solid hardened, drawn steel handle. Hickory plug in head cuts vibration to a minimum. Neoprene covered grip is firmly bonded to "I" beam section... won't deteriorate. Reduces mushrooming... lessens chance of chipping. Ideal for use around home or for big jobs and construction work.

Catalog Number	Head	Claw	Shipping weight	Price
9KT3825	16 oz.	Curved	1 lb. 12 oz.	\$4.39
9KT3827	16 oz.	Straight	1 lb. 15 oz.	4.39
9KT38273	20 oz.	Straight	2 lbs. 6 oz.	4.89

3 With select hickory handle. Has much greater strength than ordinary hickory hammer handles because it's reinforced, where strain is created, with a special steel headliner. Head and handle are pressure fitted... wedged for a tight permanent lock. Choice of curved or straight claw.

Catalog Number	Size No.	Head	Claw	Shipping weight	Price
9KT38141	1 1/2	16 oz.	Curved	1 lb. 11 oz.	\$3.49
9KT38142	2	13 oz.	Curved	1 lb. 7 oz.	3.49
9KT3816	1 1/2	16 oz.	Straight	1 lb. 12 oz.	3.49
9KT3809	1	20 oz.	Straight	2 lbs. 1 oz.	3.99

4 Leather grip on handle. Softer surface is easy to hold. Select hickory handle... much stronger than ordinary hickory... reinforced with special steel headliner for longer life. 16-oz. head, handle pressure fitted for comfort and firm grip. Size No. 1 1/2. Shpg. wt. 1 lb. 10 oz. 9 KT 3801... \$4.99

UNCONDITIONAL GUARANTEE: If any CRAFTSMAN hammer fails to give complete satisfaction, return it and it will be replaced without charge. This guarantee does not apply to hammers used in rental service.



5 Curved Claw Hammer with fire-hardened hickory handle. Size No. 1 1/2. 16-oz. forged steel head. Polished head, claws. Double steel-wedged for added strength. 9 KT 3806—Shpg. weight 1 lb. 9 oz. \$1.89

16-oz. Curved Claw Hammer. Same as 9KT3806 above except hickory handle is stained, and head and claws are not polished. 9 KT 3808—Shpg. weight 1 lb. 10 oz. 89c

7-oz. Curved Claw Hammer. Same as 9KT3808 above, except with a 7-oz. head. 9 KT 3805—Shipping weight 14 oz. 89c

6 CRAFTSMAN Model Maker's Hammer. 5-oz. forged steel head. 11-inch handle. 9 KT 3813—Shipping weight 10 oz. \$2.99

7 Curved Claw Nail Hammer. 16-oz. forged steel head. Round neck. poll. Pre-shrunk hickory plug-in head for less vibration. Cushioned rubber grip. 13 inches long. 9 KT 38101—Shpg. wt. 1 lb. 13 oz. \$2.99

8 Curved Claw Hammer with tubular steel handle. 16-oz. forged steel head, polished. Chrome-plated handle, rubber covered for a sure, comfortable grip. Imported from Japan. Shipping weight 1 lb. 14 oz. 9 KT 3812... \$1.99

(9) and (10) Tack and Upholsterer's Hammers. Forged head. Magnetized ends. Hickory handle. 9 KT 3807—Wt. 13 oz. \$1.99

10 5-oz. Tack Hammer. 9 KT 3802—Wt. 10 oz. 89c

11 Tack Puller. Just slip claws under tack heads. With 3 1/2-inch blade made of sturdy hardened tool steel. Tough plastic handle is stronger than wood. 9 KT 3811—Wt. 3 oz. 59c

12 CRAFTSMAN Sledge. Double-faced head. 4-lb. is drop forged; 8 and 10-lb. hand forged. Hickory handle.

Cat. No.	Size	Handle	Shpg. wt.	Price
9KT50751	4 lb.	15 in.	4 lb. 10 oz.	\$4.49
99KT50752C	8 lb.	32 in.	10 lbs.	7.49
99KT50753C	10 lb.	34 in.	12 lbs.	8.49

Hickory Handle only. For 8-lb. and 10-lb. sledges above. 36 inches long. 99 KT 5120C—Shpg. wt. 3 lbs. \$1.59

13 CRAFTSMAN Ball-pein Hammers. 10 Forged head. Uniform bevel reduces chipping. Hickory handle.

Cat. No.	Size	Head	Shpg. wt.	Price
9 KT 38461	3-0	4 oz.	10 oz.	\$2.49
9 KT 38463	3-0	8 oz.	15 oz.	2.69
9 KT 38464	2-0	12 oz.	1 lb. 4 oz.	2.89
9 KT 38465	0	16 oz.	1 lb. 8 oz.	3.09
9 KT 38466	2	24 oz.	2 lbs. 3 oz.	3.59

14 Rubber-tipped Mallet. Forged core. 24-oz. head. Hardwood handle. 9 KT 38295—Shpg. wt. 2 lbs. 2 oz. \$2.29

15 CRAFTSMAN Rubber Mallet. Non-marring. Face diameter 2 1/4 inches. 16-ounce head. Hickory handle. 9 KT 4578—Shpg. wt. 1 lb. 8 oz. \$1.79

16 CRAFTSMAN Plastic-tip Hammer. You get a dual purpose tool for the price of one. One tip vinyl (won't mar aluminum, wood, polished surfaces); one amber-colored plastic tip for iron, steel, etc. Both tips are replaceable. Forged steel core. Top grade AAW hickory handle.

Cat. No.	Head	Shpg. wt.	Each
9 KT 38291	8 oz.	11 oz.	\$2.49
9 KT 38292	14 oz.	1 lb. 8 oz.	3.49

17 CRAFTSMAN Heavy duty Hammers. Polished forged steel heads. Hickory handles, double steel wedged.

Cat. No.	Size	Head	Shpg. wt.	Each
9 KT 38261	1	2 lbs.	2 lbs. 9 oz.	\$4.89
9 KT 38262	2	2 1/2 lbs.	3 lbs. 4 oz.	5.19
9 KT 38263	3	3 lbs.	3 lbs. 12 oz.	5.49



18 Hammer Wedges. Two steel and one wood. Pkg. of 3. 9 KT 48341—1 1/2 in. 9 KT 48342—3/4 in. 9 KT 48343—1 in. Shipping weight 3 ounces. Package 19c

CRAFTSMAN Claw-hammer Handles. For 13, 16 and 20-oz. hammers. Hickory; steel, wood wedge. (19) 9 KT 4855—14-inch, octagon. Shpg. wt. 12 oz. 89c (20) 9 KT 4850—14-inch, round. Shpg. wt. 12 oz. 79c

(21) CRAFTSMAN Ball-pein Hammers. White hickory.

Catalog No.	Length	For Hammers	Shpg. wt.	Each
9 KT 48491	11 inches	4 to 6 oz.	7 oz.	79c
9 KT 48492	12 inches	8 to 10 oz.	9 oz.	79c
9 KT 48493	14 inches	12 to 16 oz.	10 oz.	79c
9 KT 48494	16 inches	18 to 24 oz.	12 oz.	79c
9 KT 4853	16 inches	32 to 48 oz.	14 oz.	79c

*For engineers' heavy-duty hammers.

20 Hickory Hatchet Handles. 14 inches long. 9 KT 4860—For broad, half hatchets. Wt. 12 oz. 79c 9 KT 4857—For camp, other small axes. Wt. 12 oz. 79c

23 CRAFTSMAN Rip Bar. Curved claw offset 90° for close-quarters work. Use as crowbar... 3 slots for nail pulling. Forged steel 1/2"x18 inches. 9 KT 6577—Shipping weight 2 lbs. 2 oz. \$2.39

24 CRAFTSMAN 12-in. nail puller. Steel jaws. 9 KT 6595—Shipping weight 1 lb. 7 oz. \$1.49

25 Nail Puller. Forged steel jaws. 18 inches long. 9 KT 6593—Shipping weight 5 lbs. 6 oz. \$4.69

26 CRAFTSMAN Wrecking Bar. Tough forged steel. Extra-long chisel point. Hex stock. 3/4"x24 in. 99 KT 6597C—Shipping weight 4 pounds. \$2.19

Economy Wrecking Bars (not shown). Hexagonal. 1-piece forged steel. 1 slotted, 1 bevel end. 9 KT 6596—12 in., 3/8 in. stock. Shpg. wt. 15 oz. 39c 99 KT 6598C—24 in., 3/8 in. stock. Shpg. wt. 4 lbs. \$1.29 99 KT 6599C—30 in., 3/8 in. stock. Shpg. wt. 5 lbs. 1.59

27 CRAFTSMAN Pull-a-Pry Bar. 1 chisel, 1 rocker edge. Flat, forged steel. 2x15 inches. 9 KT 6591—Shipping weight 1 lb. 12 oz. \$2.79


Steel Stud Driver Kit

Ideal for carpenters, masons, electricians, etc. Fasten furring strips, drywall brackets, shelving, conduits and peg boards to brick, concrete, cinder blocks, etc. Fastener is set in concrete with just a few blows of 2-lb. or more hammer. Protective lip. Set in shock absorbing vinyl plastic. With 12 assorted studs. 9 KT 3570—Wt. 15 oz. \$2.99

Drive Studs. Austenit-perm steel with washer. Hold material to concrete, brick, cement blocks, etc. 9 KT 35706 and 9 KT 35707 have 3/8-in. thread length; 9 KT 35703, 1 1/4-inch.

Catalog Number	Shank Length	Shpg. wt.	Pkg. Price
9 KT 35701	3/8 in.	3 oz.	15 79c
9 KT 35702	1 in.	4 oz.	12 79c
9 KT 35703	1 1/4 in.	4 oz.	11 79c
9 KT 35704	1 1/2 in.	4 oz.	10 79c
9 KT 35705	2 in.	4 oz.	9 79c
9 KT 35706	3/8 in.	4 oz.	8 79c
9 KT 35707	3/8 in.	4 oz.	8 79c



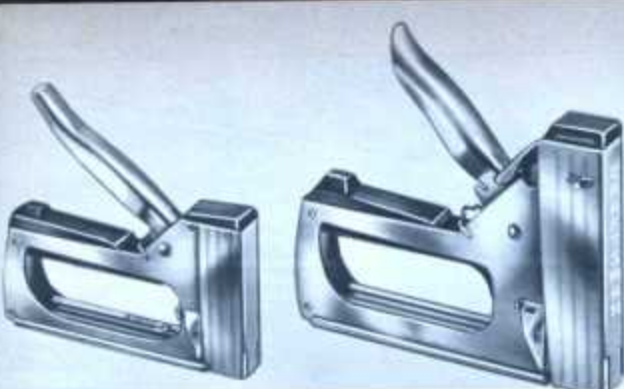

Low Priced Stapler

\$3.99

CRAFTSMAN Stapler

\$8.99



Two power settings:
Standard for regular work
High for heavy-duty work

CRAFTSMAN Variable Compression Stapler **\$11.49**

Drives $\frac{1}{4}$ -in. through $\frac{3}{4}$ -in. .050 wire staples into soft or hard wood and other materials. Better because you can choose the best power for the material being stapled. You don't have to worry about marring soft surfaces with too much force—use STANDARD; with heavy-duty jobs, longer-leg staples, use HIGH. It's faster because the pistol grip with trigger action lets you staple with the base flat against the stapling surface. You're squeezing instead of pushing... means no wobbling, fewer wasted staples. Plastisol coated trigger for better grip. Rust-resistant finish, 7-in. long. With staple extractor.

9 KT 6847—Stapler only, Shipping weight 2 pounds 10 ounces..... \$11.49

7-pc. Kit, Incl. 2500 .050 steel wire staples; 1000 ea. $\frac{1}{4}$ and $\frac{1}{2}$ -in.; 500 heavy-duty ($\frac{3}{4}$ -in.). Also incl. screen stretcher, belt hook, plastic carrying case.

9 KT 68472—Shipping weight 3 pounds 10 ounces..... Kit \$13.49

Staples for Staplers
9KT6847, 9KT6844, former 9-2645. Made of .050 high-carbon steel wire. Width of staples $\frac{1}{2}$ inch.

Length	Catalog No.	Wt.	Pkg.	Catalog No.	Shpg. wt.	Pkg.
Package of 1000						
$\frac{1}{4}$ in.	9 KT 68402	7 oz.	39c	9 KT 68652	1 lb.	6 oz. \$2.19
$\frac{1}{2}$ in.	9 KT 68658	7 oz.	59c	9 KT 68653	1 lb.	11 oz. 2.39
$\frac{3}{4}$ in.	9 KT 68403	8 oz.	69c	9 KT 68654	1 lb.	13 oz. 2.49
$\frac{1}{2}$ in.	9 KT 68404	9 oz.	69c	9 KT 68656	2 lbs.	4 oz. 2.89
$\frac{1}{2}$ in.	9 KT 68659	10 oz.	79c	9 KT 68657	2 lbs.	9 oz. 3.39

Divergent point Staples designed for piggy-backing. .050 high carbon steel. $\frac{1}{2}$ -in. 9 KT 68401—Package of 1000, Shipping weight 9 ounces..... Package 79c

Plier Stapler

Clinches staple to hold fast. Ideal for paper, bags, envelopes, even cloth and plastics. Comfortable plastic handle. Easy-load zip top. Takes 9 KT 68463 staples only (listed above). Wt. 1 lb. 1 oz.

9 KT 6845..... \$3.99



Extra Rivets for both Riveting Tools at right

Short for work up to $\frac{1}{4}$ in. thick; medium for over $\frac{1}{4}$ to $\frac{1}{2}$ in.; long for over $\frac{1}{2}$ to $\frac{3}{4}$ in.

Catalog Number	Size	Dis. in.	For Tool	Box of	Weight lb. oz.	Price Box
Steel Rivets						
9 KT 74521	Short	$\frac{1}{4}$	yes	25	4	45c
9 KT 74522	Short	$\frac{1}{2}$	yes	75	6	99c
9 KT 74523	Short	$\frac{3}{4}$	yes	500	1 10	\$4.99
9 KT 74525	Med.	$\frac{1}{4}$	yes	20	4	45c
9 KT 74527	Med.	$\frac{1}{2}$	yes	65	6	99c
9 KT 74527	Med.	$\frac{3}{4}$	yes	500	1 13	5.99
9 KT 74531	Long	$\frac{1}{4}$	yes	15	4	45c
9 KT 74532	Long	$\frac{1}{2}$	yes	60	6	99c
9 KT 74533	Long	$\frac{3}{4}$	yes	500	2 2	6.39
9 KT 74542	Short	$\frac{1}{4}$	yes	250	1 2	3.69
9 KT 74543	Med.	$\frac{1}{2}$	yes	250	1 9	3.99
9 KT 74544	Long	$\frac{3}{4}$	yes	250	1 10	4.39
9 KT 74546	Short	$\frac{1}{4}$	yes	250	2 2	4.99
9 KT 74547	Med.	$\frac{1}{2}$	yes	250	2 6	5.39
9 KT 74548	Long	$\frac{3}{4}$	yes	250	2 10	5.69
Copper Rivets						
9 KT 74741	Med.	$\frac{1}{4}$	yes	22	4	45c
9 KT 74742	Med.	$\frac{1}{2}$	yes	50	6	99c
Aluminum Rivets						
9 KT 74580	Med.	$\frac{1}{4}$	yes	20	3	45c
9 KT 74581	Med.	$\frac{1}{2}$	yes	20	3	45c
9 KT 74582	Med.	$\frac{3}{4}$	yes	45	3	99c
9 KT 74583	Med.	$\frac{1}{2}$	yes	250	12	\$3.99
9 KT 74585	Long	$\frac{1}{4}$	yes	20	3	45c
9 KT 74586	Long	$\frac{1}{2}$	yes	45	3	99c
9 KT 74587	Long	$\frac{3}{4}$	yes	250	15	4.49
9 KT 74590	Med.	$\frac{1}{4}$	yes	15	3	45c
9 KT 74591	Med.	$\frac{1}{2}$	yes	40	3	99c
9 KT 74592	Med.	$\frac{3}{4}$	yes	250	15	4.99
9 KT 74594	Long	$\frac{1}{4}$	yes	15	3	45c
9 KT 74595	Long	$\frac{1}{2}$	yes	40	3	99c
9 KT 74596	Long	$\frac{3}{4}$	yes	250	1 2	5.39
9 KT 74746*	Long	$\frac{1}{4}$	yes	12	3	45c
9 KT 74747*	Long	$\frac{1}{2}$	yes	30	5	99c
9 KT 74748*	Long	$\frac{3}{4}$	yes	250	1 6	6.49

*Large flange for soft metals

CRAFTSMAN Heavy-duty Riveting Tool

REG. U.S. PAT. OFF.

Does a fast, secure job with one hand operation

\$19.99



How rivet tools work:

1. Insert rivet stem in tool. Place rivet in hole of material you want fastened.
2. Squeeze tool. It breaks off stem and flattens bottom of rivet automatically.

Ideal for use in automotive, electrical, marine and industrial applications. Makes fast, permanent, vibration-proof joints on thin metal jobs, wood, plastic and leather-to-metal applications. Does a far more secure job than spot welds, bolts or screws. Installs and sets rivets that won't loosen from vibration. Takes $\frac{1}{4}$, $\frac{1}{2}$ and $\frac{3}{4}$ -inch diameter steel or aluminum rivets; plus $\frac{1}{2}$ -inch diameter copper and $\frac{3}{16}$ -inch diameter large-flange rivets. Forged steel handles are designed for greater leverage. Die-cast aluminum frame. Steel jaws with 3 interchangeable nose-pieces that store in head. With wrench. Order rivets at left.

Shipping weight 1 lb. 7 oz.
9 KT 7452..... \$19.99

Medium-duty Rivet Tool

Lightweight... easy to use. Makes strong, tight, one-sided fastenings without reaching behind. Takes the place of screws, nuts-and-bolts, adhesives, soldering, spot welds or ordinary rivets.

Ideal for home or shop use. Stamped-steel frame with hammeroid finish. For $\frac{1}{4}$, $\frac{1}{2}$, $\frac{3}{4}$ aluminum rivets and only $\frac{1}{2}$ diameter steel rivets. Included 30 assorted rivets, 10 backup plates.

Shipping weight 1 lb. 4 oz.
9 KT 7476..... Kit \$4.49



50 backup plates. For $\frac{1}{4}$ -inch diameter rivets.

Shipping weight 4 ounces.
9 KT 74539..... Box 45c

No Money Down on anything Sears sells

SEE PAGE 60



No Money
Down
on anything
Sears sells

SEE PAGE 96
FOR DETAILS

Our finest quality Carpenter's Saws

CRAFTSMAN Stainless Steel Saw . . hollow ground for easy cutting

1 Our best Crosscut Hand Saws. Blade stays sharp longer than ordinary saw-steel blades. Rust resistant. Straight-back style. Smooth cutting action. Hollow-ground, 26-in. blade—thinner at center of back than at ends to reduce binding. Nail-cutting teeth on top. Uniformly set teeth bevel filed to a keen edge . . . stay keen even when exposed to dampness. Hardwood handle laminated, pressure welded to end broken horns and splits. Hang hole located at end of blade.

Coarse, 8 points to the inch.
99KT36201C—Shipping weight 3 pounds . . . \$10.99
Fine, With 10½ points to the inch.
99KT36202C—Shipping weight 3 pounds . . . 10.99

CRAFTSMAN High-carbon Steel Saw with handy 1-ft. rule, 90° line

2 26-inch Hand Saws. Hollow-ground blade. 3½ in. of nail-cutting teeth on top at point; at center, a time-saving 1-foot rule. 90° etched line forms handy square. Straight-back style. Heat-treated blade—tempered. Uniform teeth bevel filed. 15-ply hardwood handle.

Coarse, 8 points to the inch. Cuts across grain.
99 KT 36171C—Shipping weight 3 lbs. . . \$7.49
Fine, 10½ points to the inch. Cuts across grain.
99 KT 36172C—Shipping weight 3 lbs. . . \$7.49
Rip Saw, 5½ points to the inch. Cuts with grain.
99 KT 36185C—Shipping weight 3 lbs. . . \$7.49

CRAFTSMAN Taper-ground Saw with weather-resistant handle

3 Crosscut Hand Saws. Special saw-steel blade. Taper-ground—thins toward back of tip to reduce binding. Tempered and polished straight back. Accurately set teeth, bevel filed and jointed. Sturdy plastic handle resists weather—won't buckle or split. Hang hole at end of blade.

Coarse 26-inch blade. With 8 points to the inch.
99KT36131C—Shipping weight 3 pounds . . \$4.49
Fine 26-inch blade. With 10½ points to the inch.
99KT36132C—Shipping weight 3 pounds . . \$4.49
Fine 22-inch blade. With 10½ points to the inch.
99KT3615C—Shipping weight 2 pounds . . \$4.19



Good quality Hand Saws . . heat-treated, tempered . . yet low priced

4 Straight-back Panel Saw. Hardened steel blade, polished. Teeth accurately set, bevel filed. Wood handle. From W. Germany. Coarse 26-in. blade, 8 pts. to in.
99 KT 3155C—Wt. 2 lbs. . . \$1.59
Fine 20-in. blade, 10 pts. to in.
9 KT 3156—Wt. 1 lb. 8 oz. . . \$1.79

5 CRAFTSMAN heavy duty all-purpose Hand Saw. 24-in. specially ground saw-steel blade. Large teeth hand-set for better cutting. Wood handle. For pruning, rough cross-cutting. From W. Germany.
99 KT 3179C—Wt. 2 lbs. . . \$3.59

6 26-inch Crosscut Saw. Rugged blade of tempered steel accurately set and toothed. Strong, high-impact plastic handle has comfortable grip. Use for rough, fast crosscutting. Coarse with 8 points to the inch.
99 KT 3597C—Shpg. wt. 3 lbs. \$3.49



Keyhole-cutting Saws

7 10-inch blade. Teeth accurately set, filed. Wooden handle. From West Germany.
9 KT 3158—Shipping weight 10 ounces . . . \$9c

8 CRAFTSMAN Saw. Our best, 10-inch tempered steel blade has 10 teeth to the inch. Patented slot-lock locks blade securely to tough plastic handle.
9 KT 3519—Shipping weight 8 ounces . . . \$1.49

9 CRAFTSMAN Nest of Saws. 3 saws in 1. Includes 18-inch metal-cutting blade, 12-inch compass saw blade, 10-inch keyhole blade. Exclusive slot-lock holds blades securely to interchangeable handle of rugged plastic.
9 KT 3520—Shipping weight 1 lb. 9 oz. Set \$3.69




10 CRAFTSMAN Hatchet with tubular steel handle. Gives maximum strength for cutting or driving. Haines pattern axe-steel head—heat-treated, polished, holds keen edge. Forged head for maximum strength. Pre-shrunk hickory plug locks head to handle . . . adds extra strength . . . absorbs shock of blows. Suede-finish rubber grip. Chrome-plated handle. Cushioned grip absorbs shock of heavy blows. Head with convenient slot for pulling nails. Has 13-inch handle. Makes 3¼-inch cut. Shpg. wt. 1 lb. 14 oz.
9 KT 4812 . . . \$6.49

11 CRAFTSMAN Half Hatchet. Extra-thin blade. Polished, forged steel head. With nail slot. 3¼-in. cut. Smooth finish. Hickory handle—steel-wedge locked.
9 KT 4805—Wt. 2 lb. 6 oz. . . \$4.99
Half Hatchet. (Not shown.) 3¼-in. cut. No. 2 size. Forged steel, heat-treated, hardened. Nail slot. Enamel finish. Hickory handle; double-steel wedgelocked.
9 KT 4800—Wt. 2 lbs. 3 oz. . . \$3.79

12 CRAFTSMAN Heavy Hatchet-Axe. 1½-pound tempered steel head. 4½-inch cut. Individually hardened striking head and blade. Enamel finish. Best for heavy cutting, camping, etc. 17-inch select hickory axe-type handle. Shpg. wt. 2 lbs. 13 oz.
9 KT 4801 . . . \$4.99

13 CRAFTSMAN All-steel Comper's Axe. With genuine leather sheath. 2½-inch cut. Highly polished steel head and neck. Solid steel handle can't break. Suede-finish neoprene grip cushions shock of blows. Use as hatchet-axe.
9 KT 4810 Shpg. wt. 2 lbs. \$5.69

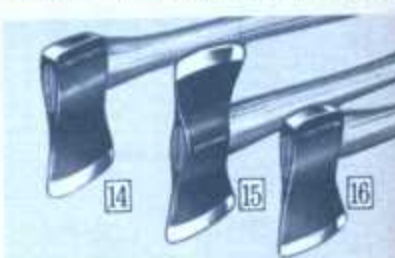

Forged Steel Axes

(14 and 15) Our best CRAFTSMAN Axes. Tempered and hardened for maximum strength. 3¼-lb. vanadium steel head keeps sharp edge. Enamel finish. 36-in. hickory handle tested to over 650-lb. strain . . . wedgelocked.

(14) 99 KT 50371C—Single bit, Wt. 6 lbs. . . \$6.49
(15) 99 KT 50411C—Double bit, Wt. 6 lbs. . . \$6.99

16 CRAFTSMAN Axe. 2¼-pound vanadium steel head . . . tempered, hardened, 28-inch hickory handle.

99 KT 5026C—Shipping weight 3 pounds . . \$5.45
Economy Axe. (Not shown.) Single bit, 3¼-pound head; black finish, 36-inch hickory handle.
99 KT 5024C—Shipping weight 6 pounds . . \$4.25

You can equip
your entire workshop
with power and hand
tools from this book




\$13.49

This Miter Box needs no special back saw

Another CRAFTSMAN exclusive! You can use any saw with this magnetic miter box except narrow-bladed ones such as compass or coping saws. Miter box has a die-cast metal back.

Hardwood base protects teeth of saws. Adjust magnetic tension on blade from 1 to 8 pounds. Adjusts and locks from 30°-90°-30° angles. Height adjusts for different width stock. On-slip hold-down. Measures 14½x8¼x10 inches. Without saw.

99 KT 36326—Shipping weight 8 lbs. . . \$13.49

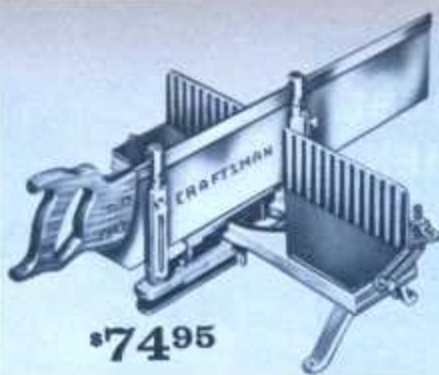

\$74.95

Our Best CRAFTSMAN Miter Box with 28-inch CRAFTSMAN saw

Saw individually hand-fitted and adjusted to each miter box. Test cuts are made at 45° and 90° to prove accuracy of miter cuts.

All-metal one-piece bed and back form rigid base. Box has offset legs for stability. Bed measures 19½x4½ inches.

Makes cut up to 5 inches deep. Cuts up to 10½-inch width at 90°, 7-inch width at 45°. Carriage is calibrated and notched to hold accurately at the most-used angles. Saw 28x5 inches. Tempered steel blade.

99 KT 3650L—Shipping weight 37 lbs. . \$74.95



\$29.99


You can reset this CRAFTSMAN Miter Box to true-up guides

All-metal . . . without back saw. Spring-loaded pointer and trigger mechanism reset easily. Guides adjust to thickness of saw—hold cut firmly to assure accuracy. Precision-milled bed and back in one, solid piece.

Blade cuts to 9¼ inches wide at 90°, to 6¼ inches wide at 45°, swings left to right. Easy-to-read saw carriage notched at most-used angles. 18x4½-in. bed of die-cast zinc. Length gauge clamps wood against back.

Ideal for most any type of woodcutting—either professional or at home. Saves time and materials . . . no need for trial cuts. Cuts every piece to exact measurements. Use with 26-inch back saw 99 KT 36195C, listed on this page below at the left.

99 KT 36301L—Shipping weight 18 pounds . . . \$29.99

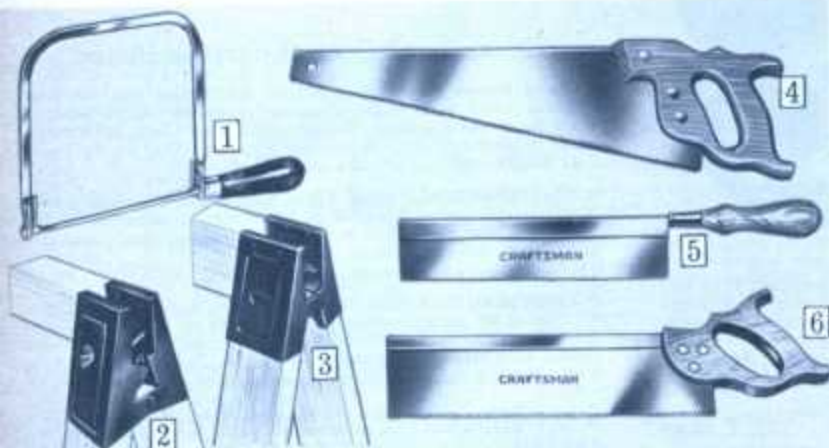

Special-purpose Saws, Blades, Brackets

CRAFTSMAN Coping Saw. Adjusts. Takes 6½-in. pin or lock loop-end blades. 6¼-in. throat, 6½-in. blade. Hardwood handle.

99 KT 3541—Shpg. wt. 13 oz. . . \$1.69

CRAFTSMAN Coping-saw Blades. 6½-in. long. For sawing wood or metal. Package of three.

Pin-end Blades, 15 teeth to the inch, . . . Pkg. 29c

99 KT 3544—Shpg. wt. 1 oz. . . Pkg. 29c

Lock loop-end Blades, 15 teeth to the inch, . . . Pkg. 29c

99 KT 3543—Shpg. wt. 1 oz. . . Pkg. 29c

Pin-end Blades, 15 teeth to the inch, . . . Pkg. 29c

99 KT 3542—Shpg. wt. 1 oz. . . Pkg. 29c

CRAFTSMAN Hack-saw-action Blades. 6½-in.

99 KT 3545—Package of 3, Wt. 1 oz. . . Pkg. 29c

Sawhorse Bracket Sets. Make your own sawhorses using 2x4's. Made of enameled steel for solid sawhorse support. Hinged. Package of 2.

Light duty. Flanged nail holes. . . Pkg. \$1.99

99 KT 28882—Wt. 2 lbs. 6 oz. . . Pkg. \$1.99

CRAFTSMAN Heavy Duty. No nails needed. . . Pkg. \$3.99

99 KT 28881—Wt. 5 lbs. 7 oz. . . Pkg. \$3.99

4 CRAFTSMAN Plumber's Saw. Cuts wood, soft metals and light gauge sheet metal. 18-in. blade of tempered steel is taper ground to resist binding. Has 15 teeth per inch . . . each expertly set for accuracy. Hardwood handle.

99 KT 3612—Shipping wt. 1 lb. 12 oz. . . \$4.49

5 CRAFTSMAN Dovetail Saw. For light work and jobs where miter saws are not practical. 15 teeth per inch. Has 10-inch spring-steel blade with braced back. Shaped hardwood handle.

99 KT 3514—Shipping wt. 1 lb. . . \$3.29


6 CRAFTSMAN Back or Miter Saw. Fits any standard-size miter box. Thin-gauged steel blade. Heavy-steel rib on back edge. Expertly set teeth—11 points to inch. Hardwood handle.

Saw with 16x3½-inch blade.

99 KT 3619—Shipping weight 2 lbs. . . \$3.99

Saw with 26x4-inch blade.

99 KT 36195C—Shipping weight 6 lbs. . . \$11.99

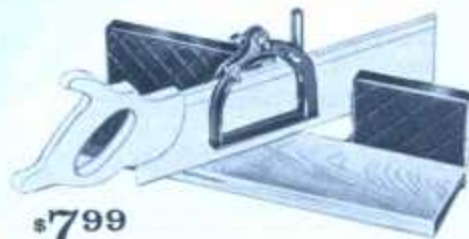

\$7.99

CRAFTSMAN Miter Box

Rigid guides adjust to any thickness saw—assure accurate cuts. 3½-in. back of cast alloy resists warping, rust. Cuts at 45° and 90°, left or right. Hardwood bed 17¼ in. long, 4½ in. wide. Hardened steel index lever and center post. Index graduated for 4, 5, 6, 8 or 20-sided figure. Without saw. Use any panel, back saw.

99 KT 3634—Shipping weight 5 lbs. 5 oz. . . \$7.99



\$1.69

Hardwood Miter Box

Sides and bottoms of ¾-in. straight grained hardwood. Slotted for left, right miters at 45°, right-angle cutoffs. 15¼-in. bed, 3½ in. wide, 1¾ in. high at back. Use panel or back saw (see 9 KT 3619, left).

99 KT 3643—Shipping weight 3 lbs. 2 oz. . . \$1.69

Accessories to repair or rebuild your saw



7 Hand-saw Handle. Fits all blades 26 in. or longer. Made of hardwood, finished and lacquered. Not bored. Screws not included.

99 KT 3616—Shipping weight 12 ounces. . \$1.29

8 Saw-handle Screws. Nickel-plated to resist rust. Come in package of four.

99 KT 36282—Shipping wt. 3 oz. . . Package 39c

9 Hand-saw Jointer. Trues-up uneven tops of saw teeth before filing. Fits all hand saws. 3¼-inch aluminum frame. 4¼-inch file included with jointer.

99 KT 4882—Shipping weight 10 ounces. . \$1.00

10 Hand-saw Set. Plier type. Gives you uniform set on any hand saw having 4 to 16 pts. to in. All-metal body and handles. Includes hardened-steel plunger and rotary anvil. Lock nuts on anvil, screw. Numbered indicator.

99 KT 4880—Shpg. wt. 1 lb. 2 oz. . . \$1.69

11 Hand-saw Filing Guide. For easier, more accurate filing. Made of steel and die-cast metal. Has 2 adjustments for angle and pitch. Adjusts to angle filing. Over-all 11½ inches long. With 6-inch file. Use with jointer 9KT4882 shown and described at left.

99 KT 4872—Shpg. wt. 1 lb. 3 oz. . . \$2.49





Our Finest CRAFTSMAN Plane

Patented lever-and-screw
design gives you extra
fine sidewise and
depth adjustment

Only
\$8.49

Smooth No. 4

*Actually cuts shavings
as thin as the paper
on which this is printed*

Adjusts to cut coarse or tissue thin. Can skim off shavings only .003 of an inch thick when precise leveling is needed. Blade is chrome-vanadium steel, honed razor sharp. Lever-and-screw device gives precise sidewise and depth adjustment. Frog fits snugly . . . eliminates jumping and side-play. Clamp assembly prevents chatter. Both sides AND bottom machined true for top accuracy. Handle and knob of solid plastic . . . many times stronger than wood . . . contoured for comfort.

Smooth No. 4, 9 inches long, 2 inches wide. With smooth bottom.
9 KT 37034—Shipping weight 4 pounds 10 ounces. \$8.49

Jack No. 5, 14 inches long, 2-inch cutter. With smooth bottom.
9 KT 37035—Shipping weight 5 pounds 15 ounces. 9.99

Fore No. 6, 18 inches long, 2½-inch cutter. Corrugated bottom.
9 KT 37036—Shipping weight 7 pounds 7 ounces. 13.99



General and Special-purpose Planes

1 No. 4 Smooth Plane. 9 inches long. For planing with the wood grain. 2-inch wide cutter of chrome-vanadium steel. Lever-and-screw device adjusts cutter sidewise and endwise. Clamp holds cutter firmly in place with no chatter. Smooth bottom. Wood handle, knob.
9 KT 37033—Shipping weight 4 pounds 7 ounces. \$4.99

2 CRAFTSMAN Rabbit Plane. 8½-in. long. 1½-in. alloy steel cutter. Makes right or left-hand cut on board edge. 2 cutter seats—rear for regular, front for bullnose work (close-in corners). Spur, removable depth gauge. Adjustable fence, saw grip handle.
9 KT 37039—Shipping weight 3 pounds 4 ounces. \$6.49

3 CRAFTSMAN Block Plane. 6½-in. long. 1½ in. cutter of tool steel . . . set at 20° angle to cut across grain. Screw for adjusting endwise and sidewise. Adjustable throat opening. Sides and bottom precision ground. Comfortable metal knob.
9 KT 37032—Shipping weight 1 pound 15 ounces. \$4.49

4 Block Plane. 7 inches long. 1½-in. cutter set at 20° for across grain work. Blade adjusts for depth and for angle. Hardwood knob.
9 KT 37031—Shipping weight 1 pound 15 ounces. \$2.99

5 CRAFTSMAN Modelmaker. 3½-inches long. 1-inch cutter of strong tool steel. For hobbyists. Rounds corners, bevels edges, smooths high spots. Small and handy.
9 KT 37037—Shipping weight 8 ounces. \$1.19



CRAFTSMAN Rasplane Tool

Kromedge blades
clean themselves **\$2.69** with 1 blade

Shavings pass freely through openings between cutting edges . . . no clogging. Blade has 2 rows of edges . . . leaves a finished surface. Kromedge blade stays sharp up to 5 times longer than ordinary blades. Two styles of replacement blades: flat for planing, half-round for irregular surfaces. Tool sold with one flat blade. 11½x10½ inches long. Smooths wood with or against the grain. Use on metals, plastics, leather, etc. Light, 1 piece, die cast frame.
9 KT 6770—Shipping weight 1 pound 3 ounces. \$2.69
9 KT 6773—Flat Replacement Blade, Shpg. wt. 4 oz. Each 79c
9 KT 6774—Half-round Replacement Blade, Wt. 4 oz. Each 79c



6 15-inch Draw Knife. 1½x10-inch blade. Hardwood handles.
9 KT 3678—Shpg. wt. 1 lb. 13 oz. \$3.99

7 Spokeshave. For planing convex and concave surfaces on edges. Has 2-inch blade, 9-inch frame.
9 KT 3661—Shipping wt. 13 oz. \$1.79

8 CRAFTSMAN Wood, Paint Scraper. 1¼-inch reversible blade; 4 edges. 6½-inch handle.
9 KT 3672—Shpg. wt. 7 oz. \$1.00
8-inch handle. As above but 2¼-in. blade.
9 KT 3656—Shpg. wt. 11 oz. \$1.29
Replacement blade for 9 KT 3672 scraper.
9 KT 3675—Shpg. wt. 3 oz. 59c
Replacement blade for 9 KT 3656 scraper.
9 KT 3674—Shpg. wt. 4 oz. 69c

9 CRAFTSMAN Linoleum Knife. Long-point style. 2½-inch blade.
9 KT 95392—Shpg. wt. 6 oz. \$1.00
9 KT 95394—Vinyl Knife. Wt. 5oz. 1.19
Linoleum Knife (not shown). Short-point style. 2½-inch blade.
9 KT 95382—Shpg. wt. 5 oz. 69c

10 CRAFTSMAN Retractable-blade Utility Knife. 5½ in. long. 5 blades.
9 KT 9486—Shpg. wt. 9 oz. \$1.39
CRAFTSMAN Utility Knife (not shown). Not retractable. 5½ in. long. 5 blades.
9 KT 9515—Shpg. wt. 6 oz. \$1.00
Blades for above Knives. Pkg. of 5.
9 KT 9517—Wt. 3 oz. Pkg. 49c

11 Hook Blades. Fit 9 KT 9515.
9 KT 9548—Wt. 3 oz. Pkg. of 5; 49c



CRAFTSMAN Mono-Vial Level

***6.99**

Only at Sears! 3 big Mono-Vials read accurately at any angle through full 360° rotation

Barrel-shaped vials enable this level to do better, more accurate work than regular 6-vial levels because it reads in all positions. On edge it levels or plumbs. Flat it's both level and cross test.

Vials are tough Butyrate plastic with machined "barrel" curvature on inside . . . 20% larger than glass vials. 24-inch aluminum frame.

9 KT 39914—Shpg. wt. 2 lbs. \$6.99

Wood Levels

1x2 1/4-inch hardwood frame, 1-piece vial mounting, 3 vials (plumb, level, 45°), have vinyl covers.

18-in. Shpg. wt. 1 lb.

9 KT 39744—\$2.29

24-in. Shpg. wt. 1 lb. 5 oz.

9 KT 39745—\$2.49

Special Levels

5 1 1/4-inch Circular Level. Levels all directions at once. Outside circle reads 1° pitch. Durable plastic casing.

9 KT 3981—Wt. 2 oz. . . . 89c

6 Magnetic Protractor Level. Reads within plus or minus 1/2°. Scale for pitch readings (1/8 to 1 1/2 inch). Use to plumb or level. Plastic vial.

9 KT 3992—Wt. 6 oz. . . . \$1.59

7 3x3/4-inch Line and Surface Level. Mono-vial.

9 KT 3982—Wt. 6 oz. . . . 69c

8 9-inch Magnetic Torpedo Level. 3 Mono-vials in aluminum frame. V-groove bottom. Reads easily on both surfaces.

9 KT 39861—Wt. 7 oz. . . . \$2.99

9 5-inch Pocket Level. V-groove bottom. Aluminum.

9 KT 3979—Wt. 4 oz. . . . \$1.00

Acrylic-plastic cover plates magnify the vials for a clearer view . . . easy to read. Special prongs (not plaster) hold vials. Cover plates have 8 screws . . . adjust 4 ways for extra precision



CRAFTSMAN Levels have magnified Crystal-Vision Vials . . . easier to see

Every level individually tested. Tough extruded frames resist warping and bending . . . precision-milled edges

78-inch Magnesium Level

1 Super-length magnesium level lets you level or plumb a complete wall . . . you get a precise plumb on door jambs too, or any extra long work. Lighter yet stronger than aluminum. Easy-to-use because it is so light. 10 metallic sealed vials (4 levels, 6 plumb). 2 shim blocks. Plastic coated carrying case.

99 KT 3996L—Shpg. wt. 11 lbs. . . \$24.99

48-inch Aluminum Level with Koroseal® shield

3 For masons. Shield protects level from rough surfaces, yet is gentle to delicate surfaces. Neither concrete nor mortar can stick to it—almost never needs cleaning. Koroseal insulates level from cold metal . . . ideal for extremely cold, winter work. Has 6 easy-to-read vials, (2 level, 4 plumb).

99 KT 39999C—Shpg. wt. 4 lbs. . . \$12.99

Aluminum Levels . . . your choice of 4 sizes

2 For masons or carpenters. Razor-edge accuracy. For fine setting, quick re-setting. Accurate even with frame tipped 30°. 6 vials (2 level, 4 plumb).

18 inches long, 2 1/4x1-inch frame.

9 KT 3991—Shpg. wt. 1 lb. 6 oz. . . \$4.79

24 inches long, 2 1/4x1-inch frame.

9 KT 39912—Shpg. wt. 1 lb. 12 oz. . 5.99

28 inches long, 2 1/4x1-inch frame.

99 KT 39913C—Shpg. wt. 2 lbs. . . 6.99

48 inches long, 2 1/4x1 1/2 inch frame.

99 KT 39975C—Shpg. wt. 4 lbs. . . 13.99

Economy 24-inch Aluminum Level

4 Ideal for use around the home . . . priced within every budget. I-beam construction. 3/4x1 1/4-inch frame. 6 easy-to-read vials (2 level, 4 plumb).

9 KT 3993—Shpg. wt. 1 lb. 4 oz. . . \$2.99

*No Money Down on
anything Sears sells*

SEE PAGE 96



10 CRAFTSMAN Self-Centering Punch. 3 inches long over-all.

9 KT 4282—Shpg. wt. 4 oz. Each 49c

11 CRAFTSMAN Nail Set. Made of tough, tempered steel.

9 KT 37541—1/32-in. 9 KT 37543—1/16-in.

9 KT 37542—1/32-in. 9 KT 37544—1/16-in.

Shipping weight each 3 oz. Each 35c

12 Glass Cutter. Single cutter. Steel wheel. Malleable iron handle.

9 KT 3794—Shpg. wt. 2 oz. . . . 49c

13 CRAFTSMAN Glass Cutter. 6 steel cutters set in turret head. Numbered to assure equalized wear. Hardwood handle.

9 KT 3797—Shpg. wt. 2 oz. . . . 99c

14 CRAFTSMAN Carbide-wheel. Glass Cutter . . . Our Best. Cutting wheel made of tungsten carbide . . . hardest metal known to science.

Outlasts regular steel-wheel glass cutters by many times. Cuts deeper. Also cuts ceramic tile.

9 KT 3796—Wt. 3 oz. . . . \$1.49

15 Pencil Compass and Scriber. Steel point is rust resistant. Adjustable wing nut.

9 KT 3768—Wt. 5 oz. . . . 69c

16 Wing Divider. Steel points. Thumb nut adjusts. Over-all length 8 inches.

9 KT 3941—Wt. 8 oz. . . . \$2.19

17 CRAFTSMAN Marking Gauge. Die-cast metal. With fractional inch markings. Shipping weight 9 oz.

9 KT 3947 . . . \$1.89

18 CRAFTSMAN Scratch Awl. 3 1/4-in. tool steel blade; tempered needle point. Wood handle secured by metal ferrule. Shipping wt. 5 oz.

9 KT 3648 . . . 99c

19 Scratch Awl. 3 1/4-inch pin-point tempered steel blade. Comfortable-grip plastic handle. Shpg. wt. 3 oz.

9 KT 3649 . . . 29c

20 CRAFTSMAN Carpenter's Pencil. Flat sides have beveled edges. Fits work-apron pocket. Heavy black lead. 7 inches long.

9 KT 3763—Shpg. wt. 2 oz. 10c

21 CRAFTSMAN Marking Crayon. Use it on wood or metal.

9 KT 37611—Blue

9 KT 37612—Yellow

Shipping weight 2 oz. . . Each 15c

22 CRAFTSMAN ButtHinge Gauge. Simplifies door hanging and mortising. 3 cutters, accurately ground. Marked in 16ths of an in.

9 KT 3940—Shpg. wt. 12 oz. \$1.99



CRAFTSMAN heavy-duty Brace

Superb professional quality. Box ratchet is completely enclosed to keep out dirt and reduce wear. Head rotates on ball bearings for extra-smooth operation. All exposed metal parts are attractively nickel plated to resist rust.

Brace only
\$7.49

6-piece Bit Set
\$7.49

Our very finest brace. Ratchet releases and reverses with knurled ring shift. Alligator-type chuck grips both round and tapered-shank bits. Hardwood head and center grip. Head is reinforced with steel for extra strength. Strong 3/4-inch frame. Full 10-inch sweep.

9 KT 4240—Brace only. Shipping weight 3 lbs. 13 oz. \$7.49

Set of 6 CRAFTSMAN Auger Bits

Same professional quality as (1) at right. Sizes 3/4, 5/8, 3/4, 5/8, 3/4 and 1 inch. Handy metal rack can be easily mounted on wall or work bench. Each bit has a removable protective plastic tip.

9 KT 4156—Shipping weight 1 pound 13 ounces. Set \$7.49



9 Close-quarter Hand Drill. Die-cast aluminum. Steel chuck takes drill bits* up to 3/4-inch diameter. 3 1/2 in. front to back. 7 3/4 inches long over-all.
9 KT 4235—Wt. 1 lb. 6 oz. \$3.69

10 All-purpose Hand Drill. Nickel plated. 3-jaw chuck holds drill bits* up to 3/4-inch diameter. Double pinion gears. Hardwood handle. 10 3/4 in. long over-all.
9 KT 4210—Wt. 15 oz. \$1.99

11 CRAFTSMAN Hand Drill. Professional quality. Smooth-running cast-iron gears. Die-cast frame. 3-jaw chuck holds round-shanked drill bits* up to 3/4-inch diameter. Drill bits store in handle (bits not included). Removable side handle. 12 1/4 in. long over-all.
9 KT 4230—Wt. 2 lbs. \$5.29

12 CRAFTSMAN Push Drill and 8 Points. Points store in special drill-selector handle—just dial to the drill size wanted. Internal bronze spirals. Ball lock chuck. Polished steel. 8 3/4 in. long over-all. 8 notched drill points (3/4, 5/8, 3/4, 5/8, 3/4, 5/8, 3/4, 5/8 in.).
9 KT 4220—Shpg. wt. 1 lb. \$4.99

13 Push Drill and 8 Drill Points. Polished steel; enameled handle. Internal bronze spirals. Steel 4-jaw chuck. With 8 fluted drill points (3/4 to 1 1/4 in.). 9 1/2 in. long.
9 KT 4217—Wt. 13 oz. \$3.99

14 CRAFTSMAN Push Drill Points. Fit all popular push drills.

Set of 8—3/4, 5/8, 3/4, 5/8, 3/4, 5/8, 3/4, 5/8 in. Shpg. wt. 3 oz.
Fluted (Style A).
9 KT 42231 Set \$1.49
Notched (Style B).
9 KT 42232 Set 1.49

Set of 4. 1/2, 5/8, 3/4, 5/8 in. Fluted (Style A).
9 KT 42181—Wt. 1 oz. Set 79c
Notched (Style B).
9 KT 42182—Wt. 1 oz. Set 79c

*Bits for (9), (10), (11) on page 44




Medium-duty Brace

A well-made, dependable brace at a low price. Four-jaw chuck grips both round and tapered-shank bits. Semi-boxed ratchet releases and reverses with a knurled ring shift.

All exposed metal parts are brightly polished. Equipped with hardwood head and center grip. Head is reinforced with steel for extra strength. Sturdy steel frame. 10-inch sweep. From Japan.
9 KT 42411—Shpg. wt. 2 lbs. 14 oz. \$3.99

No Money Down on anything
Sears sells . . . see page 96

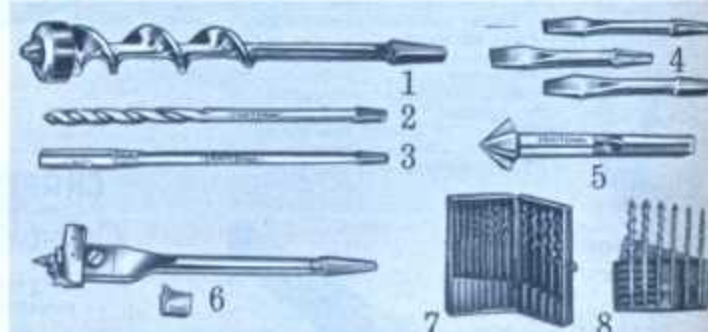

1 CRAFTSMAN Auger Bits. Professional quality. All bits wood-tested and approved. Entirely precision-milled and polished. Spiral twists uniformly ground to close tolerances for smooth action without binding. Self-starting screw points. Heat treated and tempered steel. With protective plastic tips.

Catalog Number	Size in.	Wt. oz.	Each
9 KT 41751	3/4	3	99c
9 KT 41752	5/8	3	99c
9 KT 41753	3/4	4	\$1.09
9 KT 41754	5/8	4	1.09
9 KT 41755	3/4	4	1.19
9 KT 41756	5/8	5	1.19
9 KT 41757	3/4	6	1.29
9 KT 41758	5/8	6	1.29
9 KT 41759	3/4	6	1.39
9 KT 41761	5/8	7	1.39
9 KT 41762	3/4	7	1.49
9 KT 41763	5/8	8	1.59
9 KT 41764	3/4	9	1.69

2 CRAFTSMAN Electricians' Drills. 18 inches long. For wood or soft metal. Made of tempered steel. Tapered square shank 1 1/4 inches long for use with bit brace.

Catalog Number	Size in.	Wt. oz.	Each
9 KT 67222	3/4	5	\$2.29
9 KT 67223	5/8	6	2.39
9 KT 67224	3/4	9	2.89
9 KT 67225	5/8	10	3.09
9 KT 67226	3/4	11	4.29
9 KT 67227	5/8	12	4.79

3 CRAFTSMAN Auger Bit Extension. Solid steel socket type. Use with 1 1/4 to 3/4-inch auger bits. 18 inches long.
9 KT 4161—Shpg. wt. 1 lb. 4 oz. \$3.99

4 CRAFTSMAN Screwdriver Bits. Tapered square-shank bits for use with bit brace for positive driving of slotted screws. Forged steel. 5 in. long. Meet Federal Specs. GGG-B-376.
9 KT 41001—1/4 inch wide. Shpg. wt. 3 oz. 69c
9 KT 41002—5/8 inch wide. Shpg. wt. 3 oz. 69c
9 KT 41003—3/4 inch wide. Shpg. wt. 3 oz. 79c

5 CRAFTSMAN Countersink Bit. 1/2-in. size. For wood. Made of forged steel. 1/4-inch combination shank fits bit braces, hand drills and electric drills.
9 KT 4205—Shipping weight 2 oz. 59c

6 CRAFTSMAN Expansive Bits. Professional quality. Cutter blade has 1/4-in. settings. Standard Clark Pattern. Tempered tool steel. To change settings, simply loosen hold-down plate then position cutter blade for desired hole size (see hole sizes below). With two interchangeable tool steel cutter blades. Tapered square shanks fit braces. In plastic case.
9 KT 41924—Cuts 1/2 to 1 1/4 in. holes. Wt. 6 oz. \$2.99
9 KT 41924—Cuts 3/4 to 3 in. holes. Wt. 10 oz. 3.49

7 CRAFTSMAN 14-piece Auger Bit Set. 13 bits and handy plastic storage case. Same professional quality and the 13 sizes described under (1) above left. Plastic tips not included.
9 KT 4172—Shpg. wt. 4 lbs. 8 oz. Set \$17.99

8 Imported 6-piece Auger Bit Set. Made in West Germany. Forged heat-treated steel. Sizes 3/4, 5/8, 3/4, 5/8, 3/4 and 1/2 in. In pouch.
9 KT 3084—Shpg. wt. 1 lb. 2 oz. Set \$4.49

Wire Brushes with hardwood handles

15 Curved back. 3 rows of 19 tufts (1 1/4 in.).
9 KT 3668—(14x1 in.) Wt. 8 oz. 69c
Curved back. 3 rows of 11 tufts (1 1/4 in.).
9 KT 3634—(12x3/4 in.) Wt. 7 oz. 55c

16 Straight back. 5 rows of 10 tufts (1 1/4 in.).
9 KT 3652—(4-1/2x1 1/4 in.) Wt. 7 oz. 55c
Straight back. 6 rows of 19 tufts (1 1/4 in.).
9 KT 3653—(7-3/4x2 1/2 in.) Wt. 14 oz. 99c

17 Brush and Scraper. 2 3/4-in. scraper. 4 rows of 10 tufts (1 1/4 in.).
9 KT 3647—(11x1 1/2 in.) Wt. 15 oz. \$1.39

18 Curved back. 9 rows of 21 tufts (1 1/4 in.).
9 KT 3670—(7-3/4x2 3/4 in.) Wt. 1 lb. \$1.19

19 Down-curved. 4 rows of 16 tufts (1 1/4 in.).
9 KT 3669—(10x1 in.) Wt. 7 oz. 79c





1

Top-Reading Tape

Plastic window shows accurate inside readings... tape automatically adds case size to measurements

Black markings on white blades for easier readings



2

3

1 Mylar® polyester coated steel blade lasts longer than ordinary blades. Graduated in inches on back; inches, feet and inches, foot flags, stud markings on front. Red foot flags and stud markings, black numerals and graduations on white enamel finish. Copper-nickel chrome-plated case. Belt clip on back.

1/2-inch wide Tape; 2 3/4 x 2 3/4 x 3/8-in. case.
9 KT 39173—10 feet. Shipping weight 9 oz. \$1.89
9 KT 39174—12 feet. Shipping weight 10 oz. 2.19

Extra Blades.
9 KT 39191—6 feet. Shipping weight 3 oz. 79c
9 KT 39192—8 feet. Shipping weight 4 oz. 89c
9 KT 39193—10 feet. Shipping weight 4 oz. 99c
9 KT 39194—12 feet. Shipping weight 5 oz. 1.19

3/4-inch wide Tape; 2 3/4 x 2 3/4 x 3/8-in. case.
9 KT 39176—12 feet. Shipping weight 13 oz. 3.19

Extra Blades.
9 KT 39195—10 feet. Shipping weight 5 oz. 1.49
9 KT 39196—12 feet. Shipping weight 5 oz. 1.69


2 CRAFTSMAN 1/2-in. Power-return Tape. Self-totalling flex-rigid blade; end hook. Push-button rewind. Stud markings every 16 inches.

9 KT 39101—8 ft. Wt. 8 oz. \$1.39
9 KT 39102—10 ft. Wt. 9 oz. 1.59
9 KT 39103—12 ft. Wt. 9 oz. 1.89

CRAFTSMAN 3/4-in. Power-return Tape. As above, but with stiffer blade.
9 KT 39121—10 ft. Wt. 11 oz. \$2.59
9 KT 39122—12 ft. Wt. 11 oz. 2.89

3 CRAFTSMAN 1/4-in. "Slim Tape." 6-ft. replaceable steel blade is marked in 32nds first 6 in., 16ths thereafter. Chrome-plated case; 2-in. bottom for inside measurements.

9 KT 3914—Shpg. wt. 4 oz. 79c
Extra Blade, 1/4-in. wide. For (3) above.
9 KT 39142—Shpg. wt. 2 oz. 49c

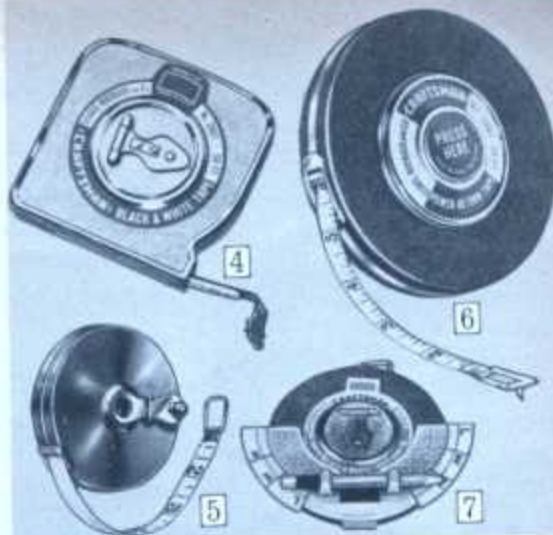

Long Tapes... Steel or Corded

4 CRAFTSMAN Black-and-white Tape. Fits in corners where other tapes can't measure accurately. Square die-cast case. Flexible, 3/4-in. white steel blade. Marks: 8ths, in., ft. Large self-adjusting end hook. Belt clip. Stud markings indicated every 16 inches.

9 KT 3907—50 feet. Shipping weight 1 lb. 3 oz. \$3.79
9 KT 39072—100 feet. Shipping weight 1 lb. 14 oz. 5.29

5 50-ft. Corded Tape. Markings in feet, inches and quarters. Made of 1/4-in. coated cotton cord. Steel case. Handle folds away flush.
9 KT 3904—Shipping weight 7 ounces. \$2.89

6 CRAFTSMAN 50-ft. Power-return Tape. Spring-loaded mechanism... tape rewinds itself... press center button. Thumb pressure controls rewind speed. Press hard for fast rewind; lightly for slower speed. Flexible 3/4-in. white steel blade. Sharp black markings in eighths, inches and feet. Double-roller mouthpiece. Combination hook and ring for one-man operation. (Deduct 1/4 in. from total when using hook). Stud markings every 16 inches. Simulated leather cover.
9 KT 3901—Shipping weight 1 pound 6 ounces. \$5.49

7 CRAFTSMAN Steel Tapes. 3/4-in. white blade with black markings in eighths, inches and feet. Stud markings every 16 inches. Hook-and-ring end for one-man measuring. Double-roller mouthpiece aids rewinding. Folding handle opens by push pin. Anti-backlash chrome-plated winding reel. Belt clip. Belt holder and marking pencil included.
9 KT 39001—50 feet. Shipping weight 1 lb. 4 oz. \$4.49
9 KT 39002—100 feet. Shipping weight 2 lbs. 3 oz. 5.99

17 CRAFTSMAN Try Square. 8-inch steel blade with black-oxide finish; white markings. Rosewood handle.
9 KT 39593—Shipping wt. 10 oz. \$2.79

18 CRAFTSMAN Sliding "T" Bevel. Adjustable 8-in. stainless steel blade; locks in position. Rosewood handle. Brass trim.
9 KT 39484—Shipping wt. 7 oz. \$2.29

Sliding "T" Bevel. With 8-in. blued steel blade. Plastic handle; locking device.
9 KT 3945—Shipping weight 5 oz. 89c

19 Yellow Chalk Line. 200-ft. ball. 38-lb. tensile strength. Size 21.
9 KT 7654—Shipping weight 6 oz. 49c

20 Nylon Twine. 100-yard spool. Size 21. 177-lb. test. Shipping weight 10 oz.
9 KT 76551—White. 99c
9 KT 76552—Yellow. \$1.19


21 CRAFTSMAN Dual-purpose Chalk and Plumb Line. Full rewind cylinder; fold-away handle. Slide-action brake releases automatically when line is rewound. Sturdy die-cast case. Combination refill cap and plumb bob tip. Powdered chalk included. Hook ring on end.
9 KT 3773—50 ft. line. Wt. 13 oz. \$1.69
9 KT 37734—100-ft. line. Wt. 14 oz. 1.99

Powdered Carpenter's Chalk. For above. Shipping wt. pkg. 2 oz.
9 KT 37583—Blue. Pkg. 10c
9 KT 37584—Red. Pkg. 10c

22 Carpenter's Blue Chalk. Box of 4 firm cakes. Make bold blue lines.
9 KT 3759—Shpg. wt. 6 oz. Box 25c

No Money Down on anything Sears sells

SEE PAGE 96

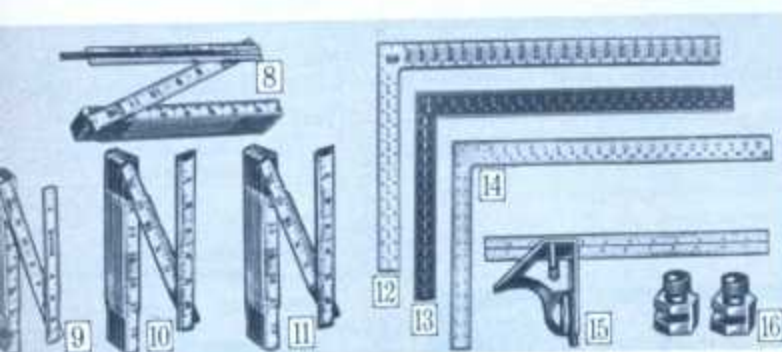

6-foot Folding Rules

8 CRAFTSMAN Extension Rule. Made of choice, straight-grained maple slats. Boxwood finish. Marked in 16ths on top and bottom edges. Read total inches or feet and inches. Brass extension machine-etched, calibrated for inside measuring. Stud center marking every 16 inches. Brass strike plates protect against wear. Positive locking joints. Outside readings.
9 KT 3934—Shpg. wt. 11 oz. \$2.29

Extension Rule. As above, but with inside readings.
9 KT 3935—Shpg. wt. 11 oz. \$2.29

9 CRAFTSMAN Folding Rule. Select heavy maple slats. White finish. Marked in 16ths on top and bottom edges. Same features as 9KT3934 above.
9 KT 3936—Shpg. wt. 9 oz. \$1.69

Folding Rule. As above but with inside readings. Shipping weight 9 ounces.
9 KT 3937 \$1.69

10 Good quality Wood Folding Rule. Made of selected hardwood. White finish. Marked in 16ths of an inch. Friction joints. Outside reading.
9 KT 3911—Shpg. wt. 7 oz. 89c

11 Economy quality Wood Folding Rule. Hardwood with white finish... plastic lacquer coating. Brass-plated friction joints. Shipping weight 6 oz.
9 KT 3918. 49c

Precision made Carpenter's Squares

12 CRAFTSMAN Durolumin Rafter Square. Our finest. Can't rust, warp or shrink. Octagon and 100ths scale; rafter and brace table. Face marked in 8ths, 16ths; back in 10ths; 12ths. Etched black numbers. 24x2-inch body; 16x1 1/2-inch tongue.
99 KT 3963C—Shipping weight 2 pounds. \$6.49

13 CRAFTSMAN Steel Square. Rafter and brace table, octagon and 100ths scale. Blued steel; white markings. Face in 8ths and 16ths; back in 10ths and 12ths. 24x2-in. body; 16x1 1/2-in. tongue.
99 KT 39641C—Shipping weight 2 pounds. \$3.99

14 Steel Square. Face in 8ths and 4ths; back in 4ths. 24x2-inch body; 16x1 1/2-inch tongue.
99 KT 39642C—Shipping weight 2 pounds. \$2.49

Steel Square. Blued finish; white markings in 8ths on both sides. 12x1 1/2-inch body; 8x1-inch tongue.
9 KT 39643—Shipping weight 13 ounces. 89c

15 CRAFTSMAN Combination Square. Use as inside or outside try square, depth gauge, rule or level. Chrome-plated steel blade. Black markings, 8ths, 16ths on one side; 16ths, 32nds on other. Hobbs setting. Semi-steel beam has level and removable scriber. Blade ends indented for scribing.

Catalog No.	Blade	Beam	Shpg. wt.	Price
9 KT 39541	6x3 1/2 in.	3 1/2 in.	9 oz.	\$1.89
9 KT 39542	12x1 in.	4 in.	1 lb.	2.49

Economy Combination Square. 12x1-in. blade. 4-in. die-cast beam with level and scriber. 8ths, 16ths stamped on one side; 16ths, 32nds on other.
9 KT 3960—Shipping weight 13 ounces. 99c

16 Angle or Stair Gauges. Brass; steel screw. Use with square for repeat cuts. Package of 2.
9 KT 3956—Shipping weight 4 ounces. Pkg. 79c





CRAFTSMAN Utility Level

11-inch, 18-power telescope

Without tripod **\$65.99**

Designed especially for the farmer or landscaper who needs an accurate instrument, ruggedly constructed, yet economically priced. Has features found on our more expensive instruments.

11-inch, 18-power telescope with standards cast in one piece for remarkable strength and stability. Easy-to-read level vial (2 1/4 inches long) sleeve protected (as in engineer's level). Sensitivity, 8 minutes per 2mm division.

One-piece erecting eyepiece lets you see images right side up. Focuses 4 1/2 feet to infinity. 3 1/4-inch horizontal circle with vernier reads directly to 15 minutes (1/4 degree).

4-screw leveling head. With plumb bob, illustrated instruction manual and removable sunshade.

Without tripod.

99 KT 46101C—Shipping weight 7 lbs. . . . \$65.99

With stiff-leg tripod.

99 KT 46103L2—Shipping weight 17 lbs. . . . 75.95

With stiff-leg tripod and 8-ft. leveling rod.

99 KT 46104L2—Shipping weight 20 lbs. . . . 88.95

CRAFTSMAN Tilting Level

Ideal for aligning vertical objects

Without tripod **\$91.99**

Low-cost, multi-purpose instrument designed to meet leveling problems, checking and setting off horizontal angles, determining grades, plumbing vertical surfaces, running straight lines, etc.

Telescope tilts from 48° below to 48° above horizontal. . . locks into position for level. 11 1/4-in. dustproof telescope, 12-power, focuses from 4 ft. to infinity. 3 1/4-in. horizontal circle reads to single degree, in 90° quadrants.

Extra-sturdy, 1-piece "U"-type yoke frame, low-friction axis bearings. 2 1/4-in. level vial, sensitivity: 8 minutes per 2mm division. 4-screw leveling head. Plumb bob included. Fitted hardwood case for carrying ease. Illustrated instruction manual "Adjustments and Field Maintenance."

Without tripod.

99 KT 46171C—Shipping weight 8 lbs. . . . \$91.99

With stiff-leg tripod.

99 KT 46173L2—Shipping weight 18 lbs. . . . 103.95

With extension-leg tripod.

99 KT 46172C2—Shipping weight 15 lbs. . . . 115.95

All **CRAFTSMAN**
REG. U.S. PAT. OFF.
Surveying Instruments
have these features
—to provide accuracy and
dependable performance




- **Achromatic lenses** . . . color corrected to provide clear, sharp image
- **Rack and pinion focusing** . . . gives smooth, responsive focus control
- **Erecting eyepiece** . . . image is right side up, facilitates reading rod
- **Telescope bored to rifle-barrel accuracy** . . . dustproof fittings
- **Sleeved level vial** . . . rigid housing protects against rough handling
- **Fine motion mechanism** . . . precision machined to prevent backlash

Plus . . .

Fitted hardwood carrying case, illustrated instruction manual.

Order instrument with
or without tripod

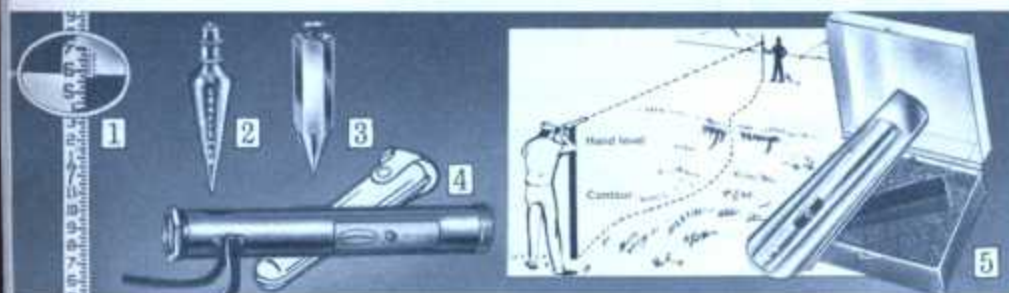

CRAFTSMAN Surveying Tools and Accessories

1 CRAFTSMAN Sliding-section Leveling Rods. Solid maple construction. Clip-on target.

Builder's Rods. (In ft., in., 8ths.) Vernier readings to 1/4 inch.

99 KT 46121L—10 ft. Wt. 6 lbs. . . . \$22.49

99 KT 46122L—15 ft. Wt. 8 lbs. . . . 27.49

Engineer's Rods. (In ft., 10ths, 100ths.) Vernier to 1/1000 ft.

99 KT 46112L—10 ft. Wt. 6 lbs. . . . \$22.49

99 KT 46113L—15 ft. Wt. 8 lbs. . . . 27.49

2 CRAFTSMAN Brass Plumb Bobs.

99 KT 46001—6-oz. size, Wt. 10 oz. . . . \$2.39

99 KT 46002—16-oz. size, Wt. 1 lb. 5 oz. . . . 4.59

3 Economy Nickel-plated Steel Plumb Bobs.

99 KT 38401—5-oz. size, Wt. 7 oz. . . . 39c

99 KT 38402—8-oz. size, Wt. 10 oz. . . . 79c

99 KT 38403—12-oz. size, Wt. 14 oz. . . . 99c

4 CRAFTSMAN Locke-type Hand Sighting Level. 6 1/2 in. long. For rough survey. 4-power bubble magnification. Focus adjusts. Vinyl pouch, belt loop, instr.

99 KT 4600—Shipping weight 12 ounces. . . . \$13.95

5 CRAFTSMAN Pocket Sighting Surface Level. As a sighting level, can be used for grading, leveling, preliminary surveys. As a surface level, can be used for leveling shelves, refrigerators, counter tops and many other items. Objective window has center line plus line to determine pitch. . . stadia lines with 1:12 ratio to estimate distance. Built in sunshade. Only 5 inches long. Lightweight aluminum with steel tension clip. Instruction manual included. Plastic case.

99 KT 4624—Shipping weight 9 ounces. . . . \$5.79

6 CRAFTSMAN Tripods. Kiln-dried hardwood.

For 99 KT 46212C, 99 KT 46101C, 99 KT 46171C.

99 KT 46091L—With stiff legs. Wt. 10 lbs. . . . \$18.49

99 KT 46092C—With extension legs. Wt. 7 lbs. . . . 29.99

For 99 KT 4619K, 99 KT 4602K and 99 KT 4603K.

99 KT 46094L—With stiff legs. Wt. 12 lbs. . . . \$41.99

99 KT 46095C—With extension legs. Wt. 12 lbs. . . . 54.99

Adjustments
and Field
Maintenance

SURVEYING INSTRUMENTS

Level (Illustration)



SERVICE INFORMATION

If your CRAFTSMAN Surveying Instrument needs adjustment or repairs, contact nearest Sears Store or Catalog Sales Office for fast, efficient service at the factory at reasonable charges.

No Money Down on
anything Sears sells

SEE PAGE 96



CRAFTSMAN Convertible Transit Levels

Sensitive scope PLUS plate vial eliminates releveling of instrument when making repeated readings. Plate level vial always allows precise leveling while scope is in transit position. With plumb bob.

\$110⁹⁵ without tripod

The 18-power, 11-inch telescope focuses 6 ft. to infinity. 26mm (over 1 inch) objective lens. Expanded vernier on 3¼-in. horizontal circle reads to 15 min. (¼°). 27¼-in. telescope vial has sensitivity of 8 min. per 2mm div. Rotating metal sleeve guards vial. Vertical arc numbered 50° to 0° to 50°. Removable sunshade. 4 leveling screws. Positive lock. Level only.

99 KT 46212C—Wt. 8 lbs. \$110.95

With stiff-leg tripod.
99 KT 46218L2—Wt. 18 lbs. 121.95

With extension-leg tripod.
99 KT 46213C2—Wt. 15 lbs. 134.95

With stiff-leg tripod, 8-ft. leveling rod.
99 KT 46219L2—Wt. 21 lbs. \$134.95

\$229⁹⁵ without tripod

The 10¼-in., 22-power telescope focuses 3 ft. to infinity. 33mm objective lens. 37/16 in. protected horizontal circle; 2¼-in. radius vertical arc numbered 50° to 0° to 50°, both with double vernier reading to 5 min. (1/12°). Spiral focusing eyepiece. 4¼ in. telescope level, sensitivity 110 sec. per 2mm div. 17/32 in. plate level vial. Positive lock, 4 leveling screws. Pin wrench, shade.

99 KT 4619K—Level only. Wt. 27 lbs. \$229.95

With stiff-leg tripod.
99 KT 46191L2—Shipping weight 39 pounds. 258.95

With extension-leg tripod.
99 KT 46195K2—Shipping weight 39 pounds. 269.95

Jeweled Compass. (Not shown.) Gear-and-pinion adjustments. For levels above.

9 KT 4616—Shipping weight 1 lb. 2 oz. \$16.49

For instruments at left; former 99-4621; and 99-46215.

9 KT 4613—Shipping weight 1 lb. 2 oz. \$13.49



Built-in optical plummet replaces plumb bob

CRAFTSMAN Contractor's Transit Level

\$299⁹⁵ without tripod

Set up in seconds. Look through plummet telescope in yoke frame... find center point by sliding built-in lateral adjuster. *More accurate than plumb bob!* 10¼-inch telescope, 22-power, focuses 3 ft. to infinity. 33mm objective lens. 37/16-inch shielded horizontal circle; 2¼-inch radius vertical arc numbered 50° to 0° to 50° with double vernier reading to five minutes. Spiral focusing eyepiece. 4¼-inch telescope level vial, sensitivity 110 seconds per 2mm division. 17/32-inch plate level vial.

Positive lock. Four leveling screws, shifting center. Pin wrench, sunshade. 3¼x8-inch thread tripod head.

Level only.

99 KT 4602K—Shipping weight 36 pounds. \$299.95

With stiff-leg tripod.

99 KT 46021L2—Shipping weight 48 pounds. 324.95

CRAFTSMAN Survey Instruments are precision tested for accuracy. Lenses color corrected for sharp, clear images. Rack and pinion control gives smooth, responsive focusing. Telescope fittings are dustproof. Precision-machined mechanism reduces backlash. All instruments come with fitted, hardwood case and kiln-dried tripod. Each has an instruction manual.

CRAFTSMAN Builder's Dumpy Level

1 One-piece, 25-power telescope (12-inch). Focuses 5 feet to infinity. Optics coated for high resolution and flat field. 38mm objective lens. Protected 37/16-inch horizontal circle.

Double vernier reading to five minutes (1/12°). Internal focusing. 4¼-inch level vial with sensitivity of 110 seconds per 2mm division. Four leveling screws, shifting center.

Tangent and screws. Comes with plumb bob and sunshade. See facts about CRAFTSMAN Survey Instruments above, right.

Level only.
99 KT 4603K—Shipping weight 26 pounds. \$173.95

With stiff-leg tripod.
99 KT 46031L2—Shipping weight 38 pounds. 194.95

With extension-leg tripod.
99 KT 46035K2—Shipping weight 38 pounds. 204.95

CRAFTSMAN Engineer's Dumpy Level

2 Our Finest! Ideal for highway, bridge, industrial construction survey work. 18-inch telescope, 36 power. Focuses from 9 feet to infinity. 2-inch diameter (51mm) objective lens.

Brilliant optics... free from spherical and chromatic aberrations. Reset scale for quick refocusing. 7¼-inch level vial with sensitivity of 20 seconds per 2mm division.

Bronze leveling head with tapered bronze spindle. Protected tangent and clamp screws.

With sunshade, spanner wrench, screwdriver and adjusting pins, stiff-leg tripod and mahogany case. See CRAFTSMAN Survey Instruments note right, above.


Shipped by express from Boston, Mass., factory.
F9 KT 46181N—Shipping weight 40 pounds. \$449.95



\$173⁹⁵ without tripod


\$449⁹⁵ with tripod

Plastic, cement, masonry-workers' and dry-wall tools designed for Professionals and do it yourselfers

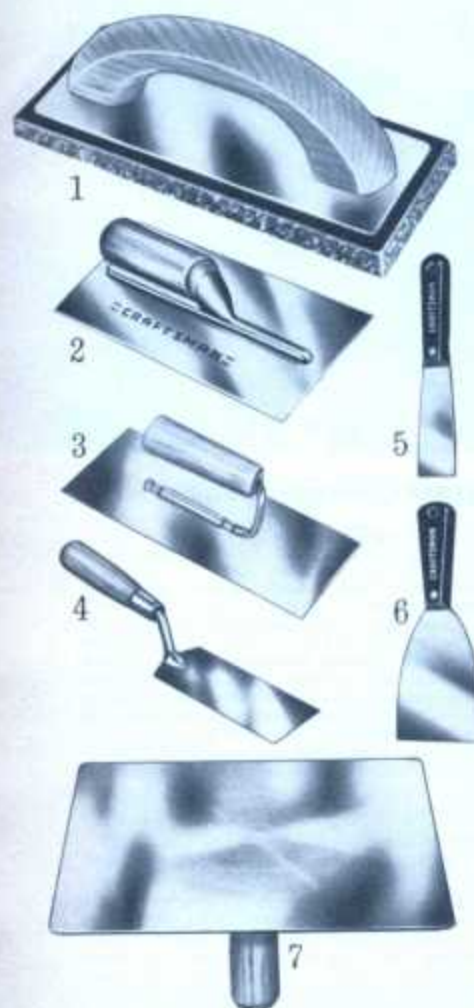

Plasterers' Tools

- 1 **Rubber Float.** Fine-cell sponge rubber, 1/4 in. deep. Aluminum backing, top edges beveled. 4x9 1/2 inches. Wood handle.
9 KT 65602—Shipping wt. 12 oz. \$1.19
- 2 **CRAFTSMAN Finishing Trowel.** 4 1/2 x 11-in. spring steel blade. Aluminum alloy shank. Wood handle.
9 KT 6550—Shipping wt. 1 lb. 2 oz. \$3.79
- 3 **Trowel.** 4 1/2 x 10-in. spring steel blade. Lacquered to resist rust. Wood handle.
9 KT 6592—Shipping weight 13 oz. 99c
- 4 **CRAFTSMAN Patching Trowel.** 1 1/2 x 5 1/2-in. steel blade, hardwood handle. For cement, plaster and putty work.
9 KT 6589—Shipping weight 5 oz. \$1.09
- 5 **CRAFTSMAN Putty Knives.** 1 1/4 inches wide, carbon steel blade, mirror polished. Plastic handle. Shipping weight each 6 oz.
9 KT 90151—Flexible blade. 89c
9 KT 90161—Stiff blade. 89c
9 KT 90091—Chisel-point stiff blade. \$1.00
- 6 **CRAFTSMAN Wall Scrapers.** 3-inch wide carbon steel blade, mirror polished. Has strong plastic handle.
Flexible blade.
9 KT 90171—Shipping weight 6 oz. \$1.29
Stiff blade.
9 KT 90181—Shipping weight 8 oz. 1.19
- 7 **CRAFTSMAN Hawk.** 13 1/2 x 13 1/2 inches. 12-gauge aluminum. Scored. Rubber cushion. Detachable wood handle.
9 KT 6562—Shpg. wt. 2 lbs. 5 oz. \$3.69

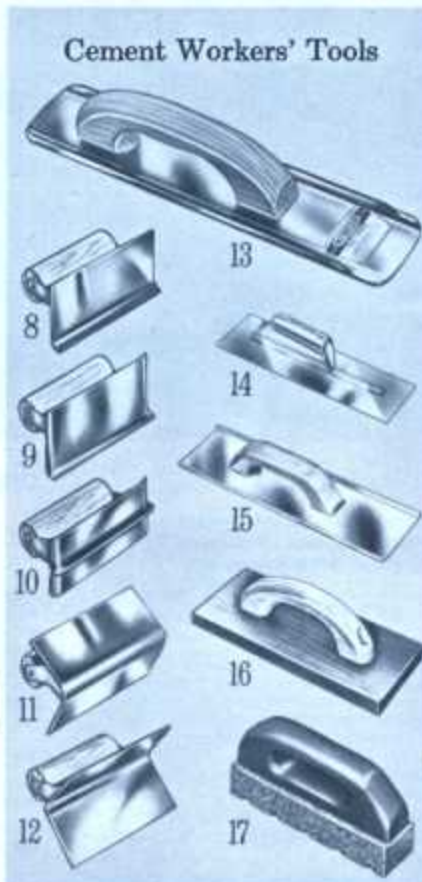

Cement Workers' Tools

- (8 thru 12) have cold-rolled steel blades, unless noted. Welded mountings. Smooth wood handles.
- 8 **Straight Edger.** 3x6 inches; radius 1/4 in.
9 KT 6541—Shipping weight 13 ounces. 89c
 - 9 **Curved Edger.** 3x6 inches; radius 1/4 in.
9 KT 65412—Shipping weight 13 ounces. 89c
 - 10 **Groover.** 3x6 in., cuts 1/4-in. groove. Ends curved.
9 KT 65413—Shipping weight 13 ounces. 89c
 - 11 **Inside-corner Tool.** 2 1/2 x 2 1/2 x 6 in. 1/4-inch radius.
9 KT 65414—Shipping weight 1 pound. 99c
 - 12 **Outside-corner Tool.** 2 1/2 x 2 1/2 x 6 in. 1/4-inch radius.
9 KT 65415—Shipping weight 1 pound. 99c
 - 13 **CRAFTSMAN Professional Float.** Built-in bevel. Aluminum blade is 3 1/4 x 16 in. Right "feel." Edges curled to prevent cement build-up. Smooth sanded handle. Built-in radius.
9 KT 6542—Shipping weight 1 lb. 8 oz. \$3.49
 - 14 **CRAFTSMAN Finishing Trowel.** 4x14-inch steel blade, aluminum alloy shank.
9 KT 6557—Shipping weight 1 lb. 2 oz. \$4.29
With stainless-steel blade. 12 rivets.
9 KT 6564—Shipping weight 1 lb. 2 oz. 4.99
 - (15 and 16) **Floats.** For floating cement to surface before troweling. Comfortable-grip wood handle.
 - 15 **Float.** 4x14-in. alum. blade, 1/4-in. rib at edge.
9 KT 65442—Shipping weight 14 ounces. \$1.59
 - 16 **Redwood Float.** 12x5x3/4 inches deep.
9 KT 6540—Shipping weight 1 lb. 4 oz. 99c
 - 17 **Rubbing Brick.** 8x2x1 1/4 in. Vitrified silicon carbide. 1 side fluted, 2 sides flat. Wood handle.
9 KT 64271—Shipping weight 2 lbs. 8 oz. \$1.99



Masons' Tools




Dry-wall Tools

- 18 **CRAFTSMAN Bricklayer's Hammers.** Polished, forged steel head, hickory handle. Length 11 in.
9 KT 6545—24-oz. head. 8 1/4 in. long. Wt. 2 lbs. \$3.99
9 KT 6543—16-oz. head. 7 in. long. Wt. 1 lb. 9 oz. 3.69
- 19 **CRAFTSMAN Square Brick Jointer.** One round, one square point. For V-shape or round joints. Forged steel. 9 inches long.
9 KT 43215—Shipping weight 9 oz. \$1.39
- 20 **CRAFTSMAN Flat-brick Jointer.** One round, one grooved end. For concave and convex pointing. Forged steel, chrome plated, 9 1/4 inches long.
9 KT 43225—Shipping weight 9 oz. \$1.39
- 21 **CRAFTSMAN Bricklayer's Chisel.** Forged steel; 4-in. bit. 1/2-in. beveled square shank. Double bevel edge.
9 KT 6558—Shipping weight 1 lb. 2 oz. \$1.89
- 22 **CRAFTSMAN Brick Trowel.** London pattern. 1-pc. blade, post, tang. 4 1/2 x 11-in. blade.
9 KT 6553—Shipping weight 1 lb. 1 oz. \$4.29
- 23 **Philadelphia-pattern Brick Trowels.** Tempered steel blade, brass mounting. Hardwood handle.
9 KT 6580—5x10 1/2-inch blade. Wt. 1 lb. 1 oz. \$2.49
9 KT 6556—4 1/2 x 8 1/2-inch blade. Shpg. wt. 9 oz. 1.99
- 24 **CRAFTSMAN Pointing Trowel.** 2 1/2 x 5 1/2-in. blade.
9 KT 6581—Shipping weight 6 ounces. \$1.09
- 25 **CRAFTSMAN Tuck-pointing Trowel.** 1 1/2 x 6-in. tempered spring-steel blade. Hardwood handle.
9 KT 6587—Shipping weight 5 ounces. 99c
- 26 **Dry-wall Hammer.** Forged steel, chrome-plated head. Rounded, scored. Dimples wall board. Hatchet blade, 14-inch handle.
9 KT 6570—Shipping weight 1 lb. 8 oz. \$4.99
- 27 **CRAFTSMAN Wall Scrapers.** Tempered steel blade, mirror-polished. Plastic handle. Shpg. wt. 7 oz.
9 KT 90051—4-inch size. \$1.49
9 KT 9005—5-inch. \$1.69 9 KT 9006—6-inch. 2.00
- 28 **Taping-Knife Spreader.** For skim-coating. Flexes from 90° to 105°. Cement and tape joints.
9 KT 6573—Shipping weight 7 ounces. \$2.59
- 29 **Corner Taping Tool.** Flexible stainless steel blade adjusts to 90°. Heavy-angled wood handle.
9 KT 65734—Shipping weight 10 ounces. \$2.19
- 30 **Adjustable Taping Knife.** 3 1/2 x 11-inch stainless steel blade. Strong hardwood handle.
9 KT 6576—Shipping weight 14 ounces. \$2.19
- 31 **CRAFTSMAN Dry Wall Saw.** Makes its own opening. Die-cast aluminum handle.
9 KT 3512—Shipping weight 1 pound. \$1.99

No Money Down on anything Sears sells

SEE PAGE 96

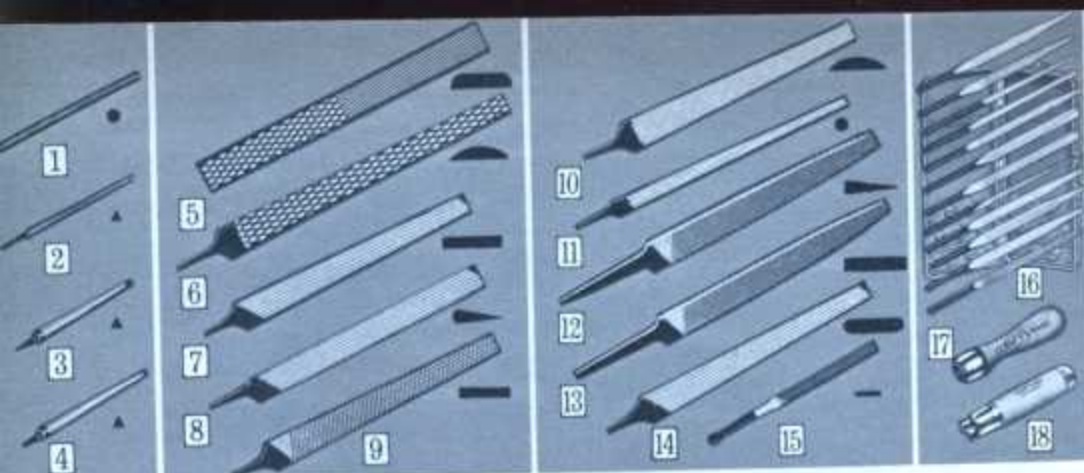

Kromedge® Files and Rasps . . stay sharp and last longer

Hard chrome surfaces keep them cutting at top efficiency far longer than ordinary files and rasps. Cut fast, *clag less*. In plastic cases. Imported from Central Europe except (15).

1 8-inch Chain Saw Files. Double cut for fast, easy cutting. 9 KT 3116, 9 KT 3118 for gasoline saws; 9 KT 3117 for electric saws. Shipping weight each 4 oz.

Catalog Number	Diam. (in.)	Chain pitch (in.)	Each
9 KT 3117	3/8	3/16	.89c
9 KT 3116	1/2	1/8	.89c
9 KT 3118	5/8	1/4	.89c

Taper Files.

Catalog No.	Size	Wt.	Each
Double extra slim			
9 KT 31332	6 in.	3 oz.	.39c
9 KT 31333	7 in.	4 oz.	.49c
Extra slim			
9 KT 31261	4 in.	2 oz.	.29c
9 KT 31262	6 in.	3 oz.	.39c
Slim			
9 KT 31272	6 in.	3 oz.	.39c
9 KT 31273	7 in.	4 oz.	.49c

Catalog No.	Type	Size	Shpg. wt.	Each
5 9 KT 31224				
9 KT 31225	Shoe Rasps	8 in.	7 oz.	\$1.09
9 KT 31225		10 in.	10 oz.	1.39
6 9 KT 31215				
9 KT 31216	Wood Rasps	10 in.	11 oz.	1.79
9 KT 31216		12 in.	1 lb. 2 oz.	2.09
7 9 KT 31292				
9 KT 31294	Mill Files	6 in.	4 oz.	.49c
9 KT 31294		8 in.	6 oz.	.59c
9 KT 31295		10 in.	9 oz.	.79c
(8) 9 KT 31210				
9 KT 31254	Crosscut Saw File	8 in.	6 oz.	\$1.09
9 KT 31255		6 in.	7 oz.	.79c
9 KT 31255		10 in.	12 oz.	\$1.09
9 9 KT 31234				
9 KT 31235	Flat Bastard File	8 in.	7 oz.	1.09
9 KT 31235		10 in.	11 oz.	1.39
10 9 KT 31242				
9 KT 31244	Half Round Bastard File	6 in.	4 oz.	.49c
9 KT 31245		8 in.	5 oz.	.69c
9 KT 31245		10 in.	7 oz.	.89c
11 9 KT 31311				
9 KT 31312	Round Bastard File	6 in.	4 oz.	.49c
9 KT 31312		8 in.	5 oz.	.69c
9 KT 31312		10 in.	7 oz.	.89c
(12) 9 KT 3131				
9 KT 3132	Knife File	6 in.	3 oz.	\$1.09
(13) 9 KT 3132				
9 KT 3132	Warding File	4 in.	2 oz.	.59c
14 9 KT 3128				
9 KT 3128	Multi File	8 in.	6 oz.	.79c

15 CRAFTSMAN Ignition File. Double cut. Length 5 in. 9 KT 3119—American made. Shpg. wt. 3 oz. Each 25c

Files, Accessories

16 Die Maker's File Set. Swiss-pattern needle-point files. Kromedge. Medium cut, No. 2 files. 5 1/2 in. long. Set of 12. From Western Europe. Shipping weight 7 ounces. 9 KT 6759 Set \$4.19

17 CRAFTSMAN File Handles. Self-threading. Strong wood handle. Metal ferrule. 9 KT 67811 29c

Catalog Number	Size	Shpg. wt.	Each
9 KT 67811	Ex. Small	3 oz.	.29c
9 KT 67812	Small	3 oz.	.29c
9 KT 67813	Medium	3 oz.	.29c
9 KT 67814	Large	5 oz.	.39c

18 CRAFTSMAN Adjustable File and Tool Handle. For tang tools with tangs up to 1/2-inch in diameter. Use as handle for files, rasps, blades, etc. Shipping weight 4 ounces. 9 KT 6775 99c

Get right type and size file to do the job fast . . easily



Power Mower, Garden Tool File
89c

Specially designed for sharpening rotary power-mower blades. Ideal, too, for spades, shovels, hoes, etc.

Double cut. Tang formed as file's handle. Kromedge. Remains sharp through long service. Length 8 in.

Imported from Central Europe. Shpg. wt. 7 oz. 9 KT 3115 89c

Magnets and Pickup Tools

19 5 1/2-inch Magnetic Pocket Tool, Stud Finder. With alnico magnet at end. Pocket clip. Handy to have around. 9 KT 4001—Shipping weight 5 oz. 99c

20 Pickup Tool. Push button . . steel jaws open. Release button . . jaws close. 9 KT 41330—12 in. long. Wt. 4 oz. 99c

21 Flexible Magnet Pickup Tool. Coiled spring shaft nickel-plated to resist rust. With permanent magnet head. Plastic handle. Bends around corners. Over-all length 17 1/4 inches. 9 KT 4178—Shipping weight 5 oz. \$1.69

22 Magnetic Pickup Tool. Extends to a full 26 1/4 inches. Lifts up to 8 ounces. Head moves at any angle. Double ball and socket joint. Fits into 16 1/2-inch tool kit, etc. 9 KT 4132—Shipping weight 9 oz. \$2.19

23 CRAFTSMAN 3-inch Horseshoe Magnet. Lifts up to 10 pounds of weight. Plastic frame. With permanent magnet. 9 KT 4003—Shipping weight 4 oz. 69c

24 Permanent Alnico Magnets. Complete with keeper. Many lifting uses in shop, plant. Imported from England.

Catalog Number	Full lbs.	Actual weight	Shpg. weight	Each
9 KT 4033	3 1/2	1 oz.	3 oz.	.59c
9 KT 40332	11 1/2	2 oz.	5 oz.	\$1.29
9 KT 40334	20	4 oz.	7 oz.	1.99
9 KT 40336	27	6 oz.	10 oz.	2.99
9 KT 4034	32	8 oz.	12 oz.	3.59
9 KT 40341	35	10 oz.	13 oz.	4.99
9 KT 40342	49	1 lb.	1 lb. 5 oz.	7.29

25 Permanent Alnico Button Magnets. Use as pickup tools. Can be used also for holding tickets and blueprints, tools, etc. Imported from England.

Catalog Number	Full lbs.	Size inches	Wt. oz.	Pkg. of	Pkg.
9 KT 40361	1 1/2	3/8 x 1/2	.3	8	\$1.89
9 KT 40362	2 1/2	1/2 x 1/4	.3	3	1.59
9 KT 40363	4	3/8 x 1	.8	2	1.69



"Pro" and home-shop Hacksaws

CRAFTSMAN Flex-rigid Hacksaw Blades. Flexible alloy steel. Teeth won't strip. 5 in. package.

Catalog No.	Length	Teeth	Shpg. wt.	Pkg.
26				
9 KT 65841	Cuts steel bars, brass, copper 1/4 to 1 inch	18 per in.	5 ounces	.79c
9 KT 65842	10 inches	18 per in.	6 ounces	.89c
27				
9 KT 65851	Cuts iron pipe, medium tubing 1/4 to 3/4 inch	24 per in.	5 ounces	.79c
9 KT 65852	10 inches	24 per in.	6 ounces	.89c
28				
9 KT 65861	Cuts thin metal sheets, tubing up to 1/4 inch thickness	32 per in.	5 ounces	.79c
9 KT 65862	10 inches	32 per in.	6 ounces	.89c

CRAFTSMAN Moly-steel Hacksaw Blades. For accurate high-speed cutting. 18 teeth per in. Last up to 6 times longer than Flex-rigid. 2 in. pkg. 9 KT 65831—10 in. long. Shpg. wt. 3 oz. 99c

9 KT 65832—12 in. long. Shpg. wt. 4 oz. \$1.19

29 Keyhole-type Hacksaw with extra blade. Non-shattering flexo-back blade . . flame-hardened teeth. Use to saw metal, wood, hardboard, plastic, etc. Molded, shockproof rubber handle. Over-all length 7 1/4 inches. 9 KT 3548—Shipping weight 10 ounces \$1.09

Replacement Blade for above. 9 KT 3540—Shipping weight 3 ounces 29c

30 CRAFTSMAN Hack Saw. Cuts flush, cuts in tight spots. Die-cast aluminum handle. Uses any hacksaw blade. Comes with 10-inch blade. 9 KT 35481—Shipping weight 12 ounces \$2.49



31 CRAFTSMAN Professional-quality Hacksaw. Cut flush in 6 different positions. Special studs keep blade from twisting. Polished, nickel-plated steel frame. Adjusts to hold 10 inch, 12-inch blades. Plastic safety grip. Cuts in 4 directions. With 10-inch tungsten-steel blade . . 18 teeth per in.

9 KT 3558—Shipping wt. 2 lbs. \$2.99

32 CRAFTSMAN Hacksaw. Polished, buffed nickel-plated steel frame . . welded. Reinforced back. Solid-rubber, pistol-grip handle. Cuts in 4 positions. Spring clip, lock nut stops blade from twisting. Adjusts for 10, 12-inch blades. 10-in. blade . . 18 teeth per in. 9 KT 3562—Shpg. wt. 1 lb. 14 oz. \$2.29

33 Medium-duty Hacksaw. Electrically welded steel frame . . nickel-plated. Reinforced back. Adjusts to 10, 12-in. blades. Pistol-grip. 10-in. steel blade . . 18 teeth per in. included. 9 KT 3553—Shpg. wt. 1 lb. 8 oz. \$1.79

Budget-priced Pistol-grip Hacksaw. (Not shown.) Reinforced back. For 8, 10, 12-in. blades. 8-in. blade (18 teeth per in.) included. Rubber handle. 9 KT 3552—Shipping weight 1 lb. 79c

GUARANTEE. Should CRAFTSMAN Precision tool require readjustment for accuracy within 90 days from date of sale, return it and we will restore it at no charge. Sears liability does not extend beyond such restoration of the instrument itself. Does not apply to instruments in rental service or instruments which have been abused, stamped or marked with electrical marking devices.

You get superb professional quality



CRAFTSMAN Universal Dial Indicator Set

\$26.99

Bezel on dial rotates for setting zero on any position of pointer. Reads in .001 inch. Graduated 0 to 50 to 0 with "+" and "-" signs on either side of zero. Range .200 in. (2 rev.). Dial diameter 1 1/4 inches. Made in England. Complete with dial gage (back plunger type), universal clamp, tool post holder, "G"-type clamp, lever attachment, 3 hardened interchangeable contact points, all in finished wood cases. Meets Federal Specifications Mil-1-18422. 9 KT 3868—Shpg. wt. 2 lbs. 10 oz. \$26.99

CRAFTSMAN

Universal Dial Indicator

For comparing dimensions and gauging deviations from standards. Reads in .001 inch. Enclosed case guards movement from damaging effects of dust, oil. Hard brass bearings and detachable steel point. Adjustable bezel. Made in England.

Catalog No.	Range	Dial diam.	Shipping wt.	Each
9 KT 38681	.250 inch	2 1/4 inch	12 oz.	\$16.99
9 KT 38682	.500 inch	2 1/4 inch	12 oz.	19.99
9 KT 38683	1 inch	2 1/4 inch	12 oz.	20.99
9 KT 38684	2 inch	3 inch	1 lb. 2 oz.	49.99

Universal Clamp and Swivel. For attaching to magnetic bases and tool posts. Hardened steel.

9 KT 40761—1/4x1/4 inch. Wt. 4 oz. \$2.99
9 KT 40762—1/4x1/8 inch. Wt. 4 oz. 2.99

Surface Gages . . Dial Indicators . . Magnetic Holders . . Finders . . Wigglers

1 CRAFTSMAN Surface Gage*. Base 3x2 1/4x3 1/4 inches. 9 and 12-inch spindles serve as depth gage. Base ground for surface-plate work. 6-inch scriber. 9 KT 4055—Wt. 2 lbs. 2 oz. \$9.99

CRAFTSMAN Surface Gages*. Toolmaker quality. Ground steel base. Adjusting screw.

Base 2 1/2x1 1/4x1 inch. Locking clamps. 4 and 7-inch spindles. 9KT40554—Wt. 1 lb. 2 oz. \$13.49

Base 3 1/2x2 1/4x1 in. 9, 12-in spindles. Universal clamp holds indicators. Wt. 3 lbs. 2 oz.

9 KT 40559 \$19.99

*Meel Fed. Specs. GGG-G-17, Type IV.

2 CRAFTSMAN Dial Test Indicator Set. Jeweled movement. 0 to +15 or 0 to -15 in. .001-inch graduations. Reversing lever. 1-inch dial. Dial indicator, body clamp, universal shank, flexible arm, contact point. In sturdy case. Wt. 9 oz.

9 KT 4076 Set \$25.99

3 Magnetic Indicator Holder. 50-pound pull magnets. Ball-and-socket action.

Shipping weight 12 ounces.

9 KT 3872 \$5.99

(4) and (5). TINY TITAN Magnet-base Holders. For tight, flat-surface mount, down to 1/4-inch diameter on round surfaces. Diameters: 1/32, 1/16, 1/8 inch. 360° locking swivel adjustment.

4 125-pound pull. Precision adjustment. Spoke-locking nut. 3-diameter universal offset rod. Tenite® plastic base. 1 1/4x4x1 1/4 in. Shpg. wt. 2 lbs. 7 oz.

9 KT 38904 \$21.99

5 65-pound pull. Precision adjustment for zeroing indicators. Tenite® plastic base. 1 1/4x1 1/4x1 1/4 inches.

Shpg. wt. 1 lb. 4 oz.

9 KT 38902 \$12.99

See index on page 96 for tools to equip your entire workshop

6 CRAFTSMAN Edge Finder. Hardened steel working surfaces. . . centerless ground. Use for positioning tool to locate working edge. Wt. 4 oz.

9 KT 38819—1/2-inch size. \$2.79


9 KT 38821—3/8-inch size. 4.99

7 CRAFTSMAN Wiggler (or Center Finder). Three tools in ONE! Ball, bent-indicator and needle point shafts. Wiggler shank. Length 4 1/2 inches.

9 KT 4021—Wt. 6 oz.—Set \$3.99

8 CRAFTSMAN 4-piece Wiggler Set. The four attachments adapt the tool for many uses. Tools are readily interchangeable in the wiggler shank to suit the job. Simply clamp attachments in shank by a ball swivel joint. . . permits adjustments to an angular position or true concentricity. Adjustable chuck tension. Tool steel. Overall length, 4 1/2 in. Plastic case.

9 KT 4004—Wt. 6 oz.—Set \$4.99

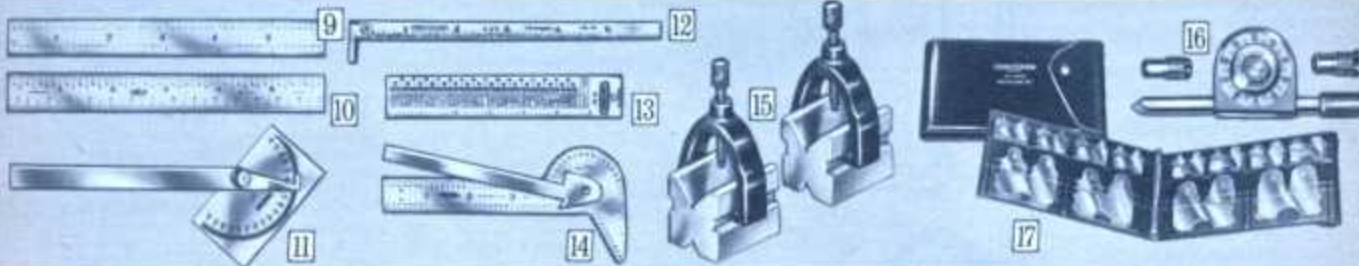

CRAFTSMAN Stainless Steel Rules. Satin chrome-plated finish. Black, easily-read graduations. Carry one in work-apron pocket for quick use. Have a "spare" for your tool chest, too! Shipping weight each 2 ounces.

Catalog No.	Size inches	Graduations		Type	Each
		Front	Back		
9 KT 40996	6x1 1/2	1/32, 1/64	1/8, 1/16	Flexible	\$1.89
9 KT 40992	12x1 1/2	1/32, 1/64	1/8, 1/16	Flexible	2.99
9 KT 40136	6x3/4	1/32, 1/64	1/8, 1/16	Rigid	1.99

Stainless Steel Rules. Shipping wt. each 5 oz.

Catalog No.	Size inches	Graduations		Type	Each
		Front	Back		
9 KT 4042	6x3/4	1/32, 1/64	1/8, 1/16	Rigid	\$1.49
9 KT 4030	6x1/2	1/32, 1/64	1/8, 1/16	Flexible	49c
9 KT 4002	12x1	1/32, 1/64	1/8, 1/16	Rigid	2.99
9 KT 4015	6x1 1/2	1/32, 1/64	1/8, 1/16	Flexible	1.19
9 KT 4006	6x3/4	1/32, 1/64	1/8, 1/16	Flexible	59c

11 CRAFTSMAN Protractor. Stainless steel. Rectangular head. Graduated 180 degrees.

9 KT 4029—Shpg. wt. 5 oz. \$1.99

Same as above; non-glare chrome plate.

9 KT 4024—Shpg. wt. 5 oz. \$4.99

12 6-in. CRAFTSMAN Machinist's-hook Rule. Tempered stainless steel, 1/4 inch wide. Graduated 32nds and 64ths.

9 KT 40354—Shpg. wt. 3 oz. \$2.19

13 CRAFTSMAN 6-in. Reference Table Rule. Stainless steel. Fractions and decimals. 32nds, 64ths inch. Data table.

9 KT 4011—Shpg. wt. 2 oz. 99c

14 CRAFTSMAN Combination Rule. Stainless steel. Use as square, bevel protractor, drill gage. 32nds and 64ths. In protective plastic case.

9 KT 4026—Shpg. wt. 4 oz. \$1.89

15 V-blocks, Clamps. 2-clamps, 2 cast iron V-blocks. For work up to 1 1/2-inch diam. V-blocks about 2x1 1/2x1 1/2 inches.

9 KT 40824—Shipping weight 2 pounds 7 ounces. Set \$7.99

Our Best V-blocks and Clamps. Hardened tool steel. V-blocks are precision-ground to be accurately square and parallel—both ends and sides. For up to 1-inch round or irregular work. 2 clamps and 2 blocks (about 1 1/2x1 1/2x1 1/2 inches) are included in the set. Clamps are malleable iron.

9 KT 4083—Shipping weight 1 lb. 10 oz. Set \$9.99

16 CRAFTSMAN Speed Indicator. Shows every revolution . . . both right and left. Sets to 0.


9 KT 4060—Shipping weight 7 ounces. \$4.79

17 CRAFTSMAN 25-piece Radius or Fillet Gage Set. Measure inside and outside corner radii; concave, convex shapes. Stainless steel blades have corresponding external, internal forms. 16 gages 1/32 to 1 1/4 in. by 64ths. 8 gages 1/16 to 1/2 in. by 32nds. Comes in sturdy case with holders.

9 KT 40952—Shipping weight 14 ounces. Set \$16.99

in CRAFTSMAN Precision Tools

REG. U.S. PAT. OFF.

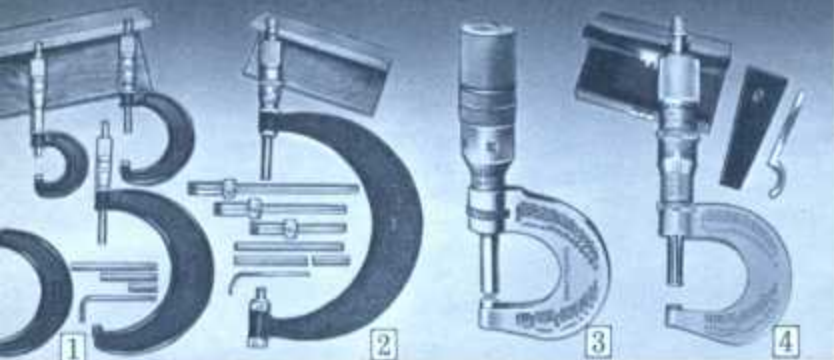

1 CRAFTSMAN Micrometer Sets. Measure from 6 to .0001 inches with perfect accuracy. Thread is ground from solid steel spindle. Both spindle and anvil lapped. Hatchet stop, spindle lock. Forged frame. Sets of 4 have 3 standards; set of 6 has 5 standards. All CRAFTSMAN micrometers meet Federal Specifications.
Set of 4, 0 to 4 in. Graduated in .001 in. Set \$94.99
Set of 4, 0 to 4 inches. Graduated in .0001 in. Set \$104.99
Set of 4, 0 to 100mm. Set \$114.99
Set of 6, 0 to 6 inches. Graduated in .001 in. Set \$141.99
Set of 4, 0 to 4 inches long, but with carbide tip. Graduated in .0001 in. Set \$114.99
Individual Micrometers*. 2-inch and up with standard. Without carbide-tips.

Catalog Number	Range	Grad.	Shpg. wt.	Each
9 KT 38601	0-1 in.	.001 in.	9 oz.	\$18.49
9 KT 38611	0-1 in.	.0001 in.	8 oz.	20.99
9 KT 38621	0-25 mm.	mm.	Pd. (9 oz.)	18.49
9 KT 38631	1-2 in.	.001 in.	10 oz.	20.49
9 KT 38612	1-2 in.	.0001 in.	10 oz.	22.99
9 KT 38622	25-50 mm.	mm.	Pd. (10 oz.)	20.49
9 KT 38632	2-3 in.	.001 in.	12 oz.	22.99
9 KT 38613	2-3 in.	.0001 in.	12 oz.	25.49
9 KT 38623	30-75 mm.	mm.	Pd. (12 oz.)	22.99
9 KT 38633	3-4 in.	.001 in.	1 lb.	24.99
9 KT 38614	3-4 in.	.0001 in.	1 lb.	27.49
9 KT 38624	75-100 mm.	mm.	2 lbs.	24.99
9 KT 38634	4-5 in.	.001 in.	1 lb.	27.49
9 KT 38615	4-5 in.	.0001 in.	1 lb.	29.99
9 KT 38635	5-6 in.	.001 in.	1 lb.	29.99
9 KT 38616	5-6 in.	.0001 in.	1 lb.	32.49

As above but carbide tips. Read in .0001 in.
9 KT 38651—0 to 1 in. Shpg. wt. 9 oz. \$22.99
9 KT 38652—1 to 2 in. Shpg. wt. 10 oz. \$24.99
9 KT 38653—2 to 3 in. Shpg. wt. 12 oz. \$27.49
9 KT 38654—3 to 4 in. Shpg. wt. 1 lb. \$29.49
9 KT 38655—4 to 5 in. Shpg. wt. 1 lb. \$31.99
9 KT 38656—5 to 6 in. Shpg. wt. 1 lb. \$34.99

2 CRAFTSMAN Mondrel Micrometer. Tubular steel frame. .001 inch readings. 4 interchangeable mandrels. 3 checking standards. Chrome-plated finish on head. In finished wood case.
9 KT 38606—Shipping weight 2 lbs. 12 oz. \$47.99

3 CRAFTSMAN Direct-reading Micrometer. Read directly from window in thimble. Clamp ring, locking nut. 0 to 1 in. Graduations .001 in. Satin-chrome-plated finish. Plastic pouch.
9 KT 40937—Shipping weight 11 ounces. \$29.99

4 CRAFTSMAN Micrometer. Reads in .0001 inch. Full-finish frame with lock, ratchet; decimal equivalents on frame. Forged steel frame. Hardened spindle; threads ground, lapped. Longer thimble lines for better readability. With plush-lined plastic simulated leather case. 0 to 1 inch.
9 KT 38661—Shipping weight 14 ounces. \$26.49

1 to 2 inch. With standard.
9 KT 38664—Shipping weight 1 lb. 4 oz. \$28.49

As above, but with carbide tip.
9 KT 38662—0 to 1 inch. Shpg. wt. 14 oz. \$27.99
9 KT 38663—1 to 2 in. Standard. Wt. 1 lb. 4 oz. \$29.99

As above, but metric reading. Reads 0 to 25 mm.
9 KT 38666—Shipping weight 1 pound. \$26.49
As above; includes 25 mm standard, 25 to 50 mm.
9 KT 38667—Shipping weight 2 pounds. \$28.49

*All CRAFTSMAN Micrometers except 9 KT 40937 meet Federal Specifications GGG-C-105b.

No Money Down on anything Sears sells

SEE PAGE 96



CRAFTSMAN Machinists' Combination Square

Accurate... blade is machine divided

Hardened, ground steel blade; easily-read graduations in 8ths, 16ths, 32nds, 64ths. Cast-iron square head; scriber, center head, non-reversible bevel protractor. Graduated 180° left, right. Level vial. 12-in. blade. Meets Fed. Specs. GGG-S-656a.
9 KT 38694—Shipping weight 2 lbs. 9 oz. \$19.99

Combination Square as above; graduated in 32nds, 64ths, 50ths, 100ths inch.
9 KT 38695—Shipping weight 2 lbs. 9 oz. \$19.99

Without protractor.
9 KT 38692—6-inch blade. Shpg. wt. 1 lb. 2 oz. \$10.99
9 KT 38693—12-inch blade. Shpg. wt. 1 lb. 12 oz. \$12.99

Without protractor or center head.
9 KT 3869—6-inch blade. Shpg. wt. 12 oz. \$7.99
9 KT 38691—12-inch blade. Shpg. wt. 1 lb. 4 oz. \$9.99

Same as above but with forged, hardened steel square and center heads... cast iron protractor.

Combination Square.
9 KT 38672—12-inch blade. Shpg. wt. 2 lbs. 8 oz. \$28.99

Without protractor.
9 KT 38671—12-inch blade. Shpg. wt. 1 lb. 12 oz. \$17.49

Without protractor or center head.
9 KT 3867—12-inch blade. Shpg. wt. 1 lb. 4 oz. \$11.99

CRAFTSMAN Universal Bevel Protractor

Reads angles to 5 min. or 1/16°. Blade ends cut at 45° and 60°. 7, 12-in. blades. Acute-angle attachment. Dull chrome plating on dial, vernier scale. Black lines, numbers. Meets Federal Specifications GGG-P-676. In wood case.
Shpg. wt. 1 lb. 6 oz.
9 KT 38696.....\$55.99



5 CRAFTSMAN 6-piece Gage Set. For gaging inside slots and holes accurately. The plunger telescopes; locks securely with knurled screw. Head ends are heat-treated for extra toughness. 1/16 to 3/16, 1/4 to 3/4, 1/2 to 1 1/4, 1 1/4 to 2 1/4, 2 1/4 to 3 1/4, 3 1/4 to 6 inches. Meets Fed. Specs. GGG-G-17.
9 KT 4027—Shpg. wt. 12 oz. \$25.99

As above, but with 4 gages in set. 1/16 to 3/16, 1/4 to 3/4, 1 1/4 to 2 1/4, 2 1/4 to 3 1/4 inches.
9 KT 40203—Shipping weight 6 ounces. \$15.99

6 CRAFTSMAN 4-piece Small-Hole Gage Set. Measures to 1/16 inch. Tool steel. 1/16 to 3/16, 3/16 to 1/2, 1/2 to 3/4, 3/4 to 1 inch. Meets Federal Specifications GGG-G-17. Plastic pouch.
9 KT 4056—Shipping weight 4 ounces. \$15.99

7 CRAFTSMAN Micrometer Depth Gages. Read to .001 inch. Chrome-plated. With lock. Meet Federal Specifications GGG-C-105b. With case.
Catalog No. Capacity Base Shpg. wt. Each

9 KT 3863	0-3 in.	2 1/2 in.	1 lb. 2 oz.	\$26.99
9 KT 38631	0-3 in.	4 in.	1 lb. 5 oz.	\$1.99
9 KT 38632	0-6 in.	2 1/2 in.	1 lb. 9 oz.	\$4.99
9 KT 38633	0-6 in.	4 in.	1 lb. 10 oz.	\$9.99

8 CRAFTSMAN Inside Micrometers. Meet Federal Specifications GGG-C-105b for accuracy. Come in finished wood case.
.001 inch (1 1/2 to 8 1/2 inches).
9 KT 3864—Wt. 1 lb. 7 oz. \$25.99
.001 inch (1 1/2 to 12 1/2 inches).
9 KT 38641—Wt. 2 lbs. 2 oz. \$29.99

50 to 200 millimeters.
9 KT 38642—Shpg. wt. 2 lbs. \$25.99
50 to 312.5 millimeters.
9 KT 38643—Shpg. wt. 3 lbs. \$29.99

9 CRAFTSMAN Adjustable Parallels. Adjust, lock securely, precisely, to pre-set measurements.
6-piece Set. 3/16 to 2 1/4 inches.
9 KT 3874—Wt. 2 lbs. 2 oz. \$28.99
4-piece Set. 3/16 to 1 1/4 inches.
9 KT 3873—Wt. 14 oz. \$17.99

10 Magnetic Scale-magnifying Glass. 5-power ground glass lens. Strong magnet base.
9 KT 40872—Shpg. wt. 4 oz. \$1.19

11 2-inch Desk Magnifier. Adjustable. 1.7-power ground lens. Heavy base.
9 KT 40871—Wt. 1 lb. 2 oz. \$3.49

12 Pocket Magnifier. Ground glass. 4-power single lens. Case included.
9 KT 40811—Shpg. wt. 3 oz. \$1.89
As above, but 5-power single lens.
9 KT 40812—Shpg. wt. 2 oz. \$1.29
As above, but 8-power double lens.
9 KT 40813—Shpg. wt. 4 oz. \$2.99

13 Accurate Solid Steel Squares. Ground, hardened steel blades. Made in England.
2 1/4 inch blade, 1 3/4 inch beam.
9 KT 40401—Shpg. wt. 5 oz. \$2.99
3 3/4 inch blade, 2 1/4 inch beam.
9 KT 40402—Shpg. wt. 8 oz. \$3.49
4 inch blade, 3 inch beam.
9 KT 40403—Shpg. wt. 11 oz. \$3.99
6 inch blade, 3 3/4 inch beam.
9 KT 40404—Shpg. wt. 15 oz. \$4.99


14 CRAFTSMAN Depth Gage. 6x7/32-inch rule. Hardened head graduated right and left to 30°, 45° and 60°. Marked in 32nds, 64ths of an inch.
9 KT 40442—Shpg. wt. 5 oz. \$3.99

15 CRAFTSMAN 6-in. Vernier Height Gage. 2 1/2-in. long vernier. Reads 0 to 6 in. Lapped base. Recessed beam, cut-away base for 0 reading. Straight scriber. Meets Federal Specs. GGG-C-111a. Hardwood case.
9 KT 40166—Wt. 4 lbs. 8 oz. \$59.99

16 Micrometer. Graduated in .001 inch. From 0 to 1-inch. Thimble with stop. Does not meet Federal Specifications.
9 KT 4079—Shpg. wt. 8 oz. \$4.49

SHIPPING NOTE: "P" items (as 9 KT 3862) shipped from factory in St. James, Minnesota.

Calipers, Rules and Gages for toolmakers and machinists

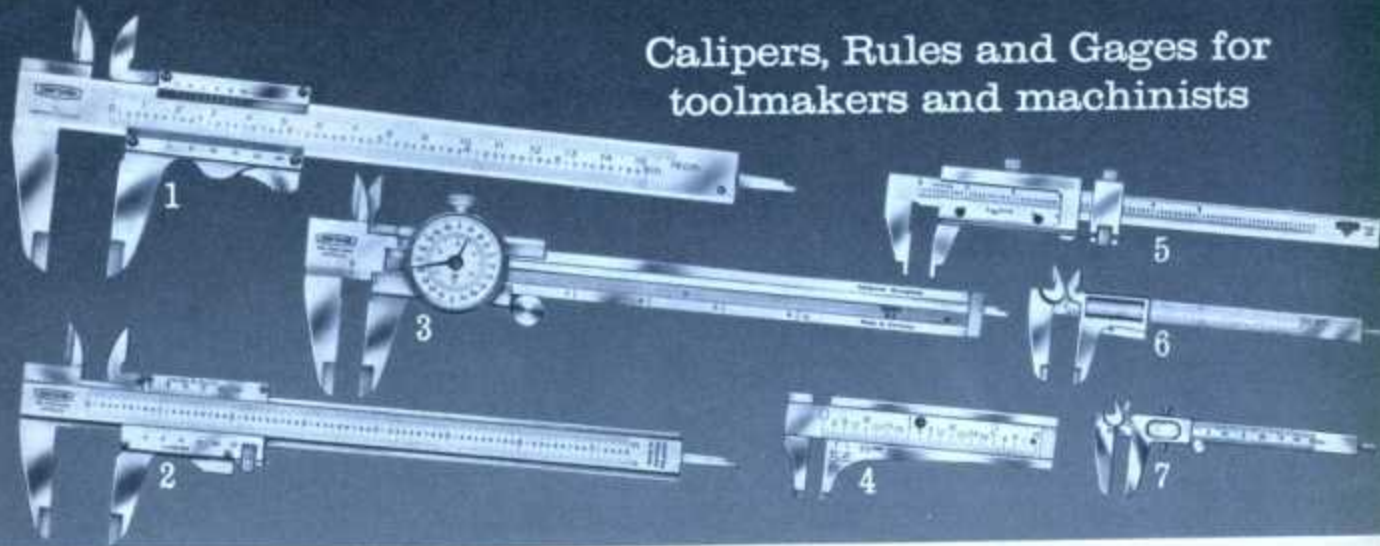

Precision craftsmanship... perfection in every detail for accuracy

1 CRAFTSMAN Vernier Calipers. Accurate to .001 of an inch. Stainless steel. Adjustable vernier plates allow for normal wear. Recessed beam... no number rub-off. Thumb-action sliding jaw... self-locking. Top scale reads in 1/20th millimeters; bottom scale in 1/1000ths. Main, vernier scales chrome-plated. Hardened jaws have lapped edges. 8 1/4 in. long. Caliper capacity 5 1/4 in. From West Germany.

9 KT 40162—Shpg. wt. 8 oz. \$19.99

CRAFTSMAN Vernier Calipers. As above, but vernier plates not adjustable. Unlapped jaws. Chrome-plated scales in millimeters and 1/1000ths. 8 1/4 in. long. Capacity 5 1/4 inches. From West Germany.

9 KT 40161—Shpg. wt. 8 oz. \$13.49

2 CRAFTSMAN Micro-screw Vernier Calipers. Accurate to .001 in. Stainless steel. Combines thumb-lock jaw with fine adjustment screw. Adjustable vernier plates.

Chrome-plated scales flush with beam. Graduated in 1/1000ths. 8 1/4 in. long. Caliper capacity 6 inches. Made in West Germany.

9 KT 40163—Shipping weight 15 ounces... \$27.99

3 CRAFTSMAN Dial Calipers. Accurate to .001 inch. Stainless steel. Plexiglas® protects dial. Thumb roller and lock screw. Sliding depth rod. Lapped jaws. Graduated in 1/1000ths. 9 1/4 inches long. Capacity 6 inches. From West Germany.

9 KT 40164—Shipping weight 1 pound 1 ounce... \$38.99

4 Pocket Slide Calipers. Polished steel. For inside measurements to 2 5/8 inches; outside, up to 2 1/4 inches ("in" and "out" readings). Three-inch scale. Graduated in 32nds and 64ths. Spring stop.

9 KT 4028—Shipping weight 3 ounces... \$3.49

5 Our best CRAFTSMAN Vernier Calipers. Accurate to .001 in. Meets Fed. Specs. GGG-C-111a for design and accuracy. Chrome vanadium steel. Adjustable plates. Both sides marked. One for outside; other for inside measurements. Graduated in 1/1000ths. 10 1/4 in. long. Capacity 6 in. Made in U.S.A.

9 KT 40165—Shipping weight 1 pound 9 ounces... \$49.99

6 Vernier Calipers. Accurate to .002 of an inch. Enclosed sliding head, locking lever, thumb latch. Reads inside, outside depth. Steel. 5-in. scale. Bottom scale reads in .001 inches, top 1/128th in. Plastic case.


9 KT 40252—Shipping weight 8 ounces... \$6.49

As above, except graduated in millimeters and inches.

9 KT 40255—Shipping weight 8 ounces... 6.49

7 Vernier Calipers. Accurate to .01 of an inch. For inside, outside measurements. Use an depth gage. Full 5-inch scale. Graduated in 16ths, 32nds inch. Vernier readings of 1/128th inch. Roller adjustment.

9 KT 4022—Shipping weight 6 ounces... \$1.89

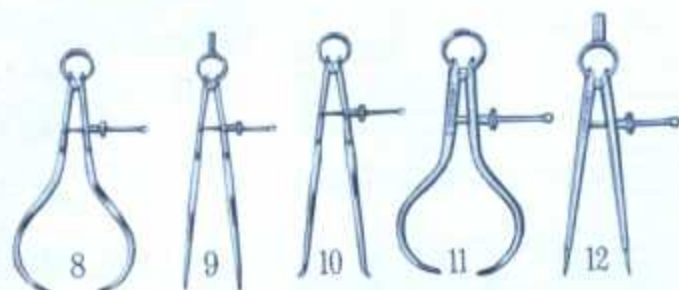

Non-slip Calipers and Dividers

CRAFTSMAN Calipers and Dividers. Flat-leg pattern. Made from finest steel. Hardened points.

	Style	Catalog No.	Size	Shpg. wt.	Price
8	Outside Calipers	9 KT 38594	4 in.	.5 oz.	\$2.39
		9 KT 38596	6 in.	.7 oz.	2.69
9	Dividers	9 KT 38574	4 in.	.4 oz.	2.39
		9 KT 38576	6 in.	.6 oz.	2.69
10	Inside Calipers	9 KT 38584	4 in.	.4 oz.	2.39
		9 KT 38586	6 in.	.6 oz.	2.69

CRAFTSMAN Toolmakers' Calipers and Dividers. Our best professional quality. Round legs. Stiff spring and tapered spool eliminate wobble.

Catalog Number	Size	Shpg. wt.	Price
11 Outside Calipers			
9 KT 38512	2 in.	.3 oz.	\$3.29
9 KT 38514	4 in.	.4 oz.	3.59
9 KT 38516	6 in.	.6 oz.	3.99

Meet Fed. Specs. GGG-D-351c, Type A, Class 2.

9 KT 38502	2 in.	.3 oz.	\$3.29
9 KT 38504	4 in.	.4 oz.	3.59
9 KT 38506	6 in.	.6 oz.	3.99

Hemaphysal Calipers

9 KT 38534	4 in.	.4 oz.	3.59
9 KT 38536	6 in.	.6 oz.	3.99

Meet Fed. Specs. GGG-C-95, Type I, Class I, Style B.


9 KT 38522	2 in.	.3 oz.	\$3.29
9 KT 38524	4 in.	.4 oz.	3.59
9 KT 38526	6 in.	.6 oz.	3.99

15 CRAFTSMAN Adjustable Trammel Points. Steel with black wrinkle finish. Adjustable 3-in. points. Meets Fed. Specs. GGG-T-661a.

9 KT 4061—Shipping weight 7 ounces... \$7.49

Replaceable points. For (12), (13) and (15) above.

9 KT 38509—Package of 6. Wt. 2 oz. Pkg. 29c

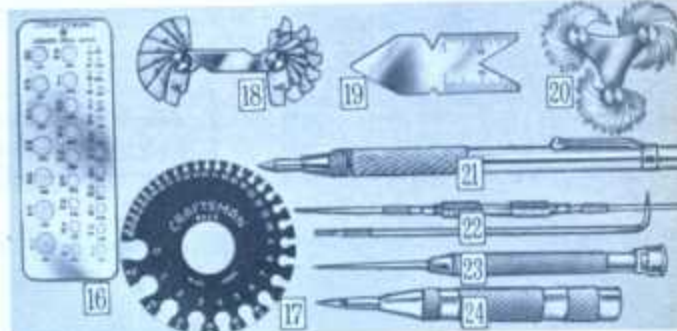

16 CRAFTSMAN Drill Gages. Polished steel. 29 fractional sizes, from 1/4 inch up to 1 1/2 inch.

9 KT 4049—Shpg. wt. 6 oz. \$1.99

Drill and wire gage sizes 1 to 60. Includes index for taps.

9 KT 4047—Shpg. wt. 6 oz. \$1.99

A to Z drill sizes. Not CRAFTSMAN.

9 KT 40472—Shpg. wt. 5 oz. \$2.89

17 CRAFTSMAN Circular Gage. For wire, sheet and plate sizes 0 to 36. American Std. for non-ferrous metals.

9 KT 4023—Shpg. wt. 6 oz. \$4.99

18 Fillet or Radius Gages. Polished steel. Sturdy case with screw to hold blades in position singly or to secure all leaves in case. Radius size marked on each leaf.

16-leaf. For determining radius of fillets, inside and outside corners 1/32 to 17/64 by 64ths.

9 KT 4053—Shpg. wt. 4 oz. \$4.49

34-leaf. For convex or concave gaging 1/64 through 17/64 by 64ths.

9 KT 40534—Shpg. wt. 5 oz. \$5.49

19 CRAFTSMAN Lathes-Centers Gage. U.S. Std. 60°. Stainless steel. Graduations: 14th, 20th, 24th, 32nd inches.

9 KT 40642—Shpg. wt. 2 oz. \$1.29

20 CRAFTSMAN Thread Gages. For screw pitches 4 to 84 on V American threads. Made in England.

9 KT 4031—Shpg. wt. 5 oz. \$7.49

Pitches 9 to 40. Use on V-threads.

9 KT 4048—Shpg. wt. 2 oz. \$2.99

21 CRAFTSMAN Carbide-Tip Scriber. Scribes, engraves hard metals, glass, plastics, ceramics, other hard surfaces. Pocket clip. Aluminum body. Long-life tungsten carbide tip. One end has magnet to retrieve small screws, etc.

9 KT 4078—Shpg. wt. 3 oz. \$1.69

22 CRAFTSMAN Double-Scriber. Knurled steel sleeve. One straight and two bent, tempered steel points... interchangeable.

Length with short point 9 inches; with long point 12 inches. Meets Fed. Specs. GGG-S-131c, Type II, Class 2.

9 KT 4014—Shpg. wt. 4 oz. \$1.49

23 CRAFTSMAN Pocket Scriber. Knurled steel body. Nickel-plated point.

9 KT 4051—1/4-in. diam. Wt. 3 oz. 79c

9 KT 40513—3/4-in. diam. Wt. 4 oz. 99c

24 CRAFTSMAN Automatic Center Punch. Heat-treated alloy steel point. Adjusts for heavy or light impressions. One-hand use... no hammer needed. Standard 1/2-in. diameter, 5 in. long.

9 KT 40542—Shpg. wt. 5 oz. \$3.99

No Money Down on anything Sears sells

SEE PAGE 16

Creative Precision Tools for electronic technicians and hobbyists



1



2



Knife Sets and Accessories

For precision, cutting, scraping, scribing jobs.

1 12-piece Knife Set. Use for electronic or clerical work. 5x $\frac{1}{8}$ -in. and 5x $\frac{1}{16}$ -in. long knives. 10 assorted blades. Plastic case.

9 KT 45127—Shipping weight 7 oz. Set \$2.79

2 13-piece Knife Set. Complete set for all applications. 5x $\frac{1}{16}$, 5x $\frac{1}{8}$ and 3 $\frac{1}{2}$ x $\frac{3}{16}$ -in. knives. 10 assorted blades. Plastic case.

9 KT 45126—Shipping weight 10 oz. Set \$3.99

3 All-purpose Knife. 5 in. long. $\frac{1}{4}$ -in. diameter. 9 KT 45123—Shipping wt. 4 oz. 69c

Blades for 5x $\frac{1}{8}$ -in. knife in sets above. 5 in. pkg. 9 KT 45150—Angle. Shpg. wt. 3 oz. 59c

9 KT 45152—Curve. Shpg. wt. 3 oz. 59c

Blades. For 5x $\frac{1}{8}$ -in. 3 $\frac{1}{2}$ x $\frac{3}{16}$ -in. knives. 5 in. pkg.

9 KT 45155—Deep angle. Wt. 3 oz. 59c

9 KT 45156—Curve. Shpg. wt. 3 oz. 59c




Rotating . . . tilting Vise

Work in any position. Rotate or tilt vise as needed for job. Swivels 360°. Head swivels and tilts to any tangent up to 180°.

Rugged construction. Die-cast zinc, aluminum alloys reinforced with steel and brass parts. Single lock-screw holds head in desired position. Base 4 $\frac{1}{2}$ x4 $\frac{1}{2}$ inches. Overall height 6 $\frac{1}{2}$ inches. Jaws open to 2 $\frac{1}{2}$ inches.

Shpg. wt. 4 lbs. 2 oz.

9 KT 45339 \$15.99

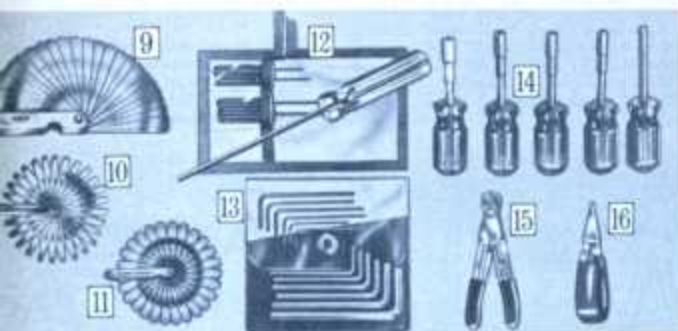

9 15-leaf Thickness (Feeler) Gauge. 3 $\frac{1}{8}$ -in. blades. Range in size from .003 to .018 inch thick. .003 to .151 inch with blades combined.

9 KT 4058—Shpg. wt. 6 oz. 69c

10 25-leaf Thickness (Feeler) Gauge. 3 $\frac{1}{8}$ -in. blades. Range in size from .0015 to .035 inch with blades combined.

9 KT 4059—Shpg. wt. 7 oz. \$1.59

11 CRAFTSMAN Thickness (Feeler) Gauge. 3 $\frac{1}{8}$ -in. leaves taper to $\frac{1}{4}$ -in. width. Has 26 leaves; locking device. Leaves range from .0015 to .025 in. Up to .3280 in. with all leaves.

9 KT 4094—Shpg. wt. 6 oz. \$5.49

12 CRAFTSMAN Thickness Gauge. Contains 3 $\frac{1}{8}$ -in. leaves (26 of them) ranging in size from .0015 to .025 in. Up to .3280 in. with all leaves.

9 KT 4057—Shpg. wt. 5 oz. \$4.29

*Meat Federal Specifications GGG-G-17a, Type VIII, Class I, Style A

13 5-piece Hex Driver Kit. Must-used sizes: .050, $\frac{1}{16}$, $\frac{5}{64}$, $\frac{1}{4}$, $\frac{3}{32}$ (across flats). Drive, tighten components, control knobs, chassis-mounting screws. Tempered steel blades, plastic grips. Plastic pouch included.

Shipping weight 6 ounces.

9 KT 45216 Kit \$4.59

14 Hex, Spline Kit. Includes six hex in sizes .050 to $\frac{1}{16}$ inch and six spline in sizes .033 to .090 inch.

9 KT 45116—Shpg. wt. 4 oz. Kit \$1.69

14 5-piece Sub-miniature Nut Driver Set. In sizes: $\frac{5}{64}$, $\frac{1}{8}$, $\frac{3}{16}$, $\frac{1}{4}$, $\frac{5}{16}$ -in. Plastic handles for firm grip.

9 KT 45044—Shpg. wt. 8 oz. Set \$4.19

15 Wire Stripper. Built-in adjustment on handle. Pre-set for wire sizes No. 10 through No. 20. Nickel-plated steel. With spring.

9 KT 45334—Shipping wt. 6 oz. \$1.69

16 Heat Sink. For electronic soldering. Copper jaws absorb excess heat from delicate parts. Insulated handles.

1 $\frac{1}{2}$ -inch size.

9 KT 45331—Shipping wt. 3 oz. 79c

2 $\frac{1}{2}$ -inch size.

9 KT 4533—Shipping wt. 3 oz. 89c

17 Scissor Clamps. Use as heat sinks, for handling or holding small parts in assembly, solder work. Straight end. Serrated jaws. Locking notches. 5 inches long.

9 KT 45018—Wt. 4 oz. \$4.49

18 Electronic Scissors. Use to snip fine wire. Fits palm of hand for a comfortable grip. Made of sturdy steel. 5 inches long.

9 KT 45337—Wt. 3 oz. \$3.99

Standard Design Scissors (not shown). 5 inches long.

9 KT 45338—Wt. 3 oz. \$2.99

19 CRAFTSMAN straight-end Tweezers. Nickel-plated, tempered spring steel. 6 inches long.

9 KT 4459—Shpg. wt. 4 oz. 89c

20 CRAFTSMAN bent-end Tweezers. Made of nickel-plated, tempered spring steel. 6 $\frac{1}{2}$ inches long.

9 KT 4460—Shpg. wt. 4 oz. 89c



26 6-pc. Open-end Wrench Set. $\frac{1}{4}$, $\frac{3}{16}$, $\frac{1}{8}$, $\frac{1}{16}$, $\frac{1}{32}$, $\frac{1}{64}$ -in. Plastic handle.

9 KT 45113—Shpg. wt. 6 oz. Set \$2.59


6-pc. Nut Driver Set. Sizes as 9KT45113.

9 KT 45115—Shpg. wt. 6 oz. Set \$3.19

6-pc. Hex Wrench Set. Includes: .028, .035, .050, $\frac{1}{16}$, $\frac{1}{8}$, $\frac{1}{4}$ -in. Plastic handle.

9 KT 45114—Shpg. wt. 6 oz. Set \$2.59

Sub-Miniature Tools

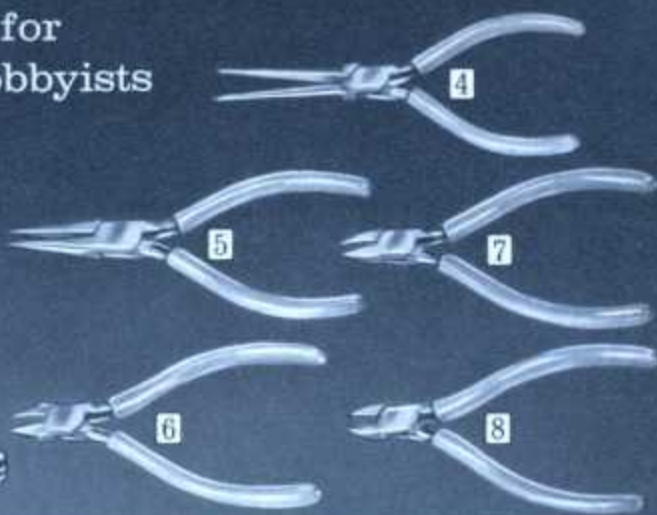

Precision Pliers and Cutters

Electronic Assembly Pliers. Full polished steel jaws are forged for added strength. Radius edges on smooth jaws won't mar, nick or scratch finest wires. Plastic grips for a firm, comfortable hold. Precision made lap joints, smoothly polished for precision feel and action.

4 Needle-nose. For deep reach when setting fine wire. Smooth jaws. For light work on small, component parts.

4 $\frac{1}{2}$ inches long.

9 KT 45002—Shipping wt. 4 oz. \$4.89

6 inches long.

9 KT 45003—Shipping wt. 5 oz. 4.99

5 Long, narrow chain nose for fine wire. Extremely fine point tips. Ideal for close-quarters work. No spring. 4 $\frac{1}{2}$ in. long.

Shipping weight 4 ounces.

9 KT 4500 \$3.99

Electronic Assembly Cutters. Full flush cut (except as noted) for a square cut. For No. 22 or smaller soft copper wire. Sturdy, drop-forged, polished steel. Plastic grips for a sure hold. 4 inches long.

6 Diagonal. For cutting at extreme tip. Tapered jaws cut close for extremely fine work. With spring.


9 KT 45006—Wt. 4 oz. \$5.89

7 Diagonal. Semi-finish cut. Narrow head. Extreme tip cut. With spring.

9 KT 45008—Wt. 4 oz. \$4.99

8 Diagonal. For extra-fine work. With spring.

9 KT 4521—Wt. 4 oz. \$5.49

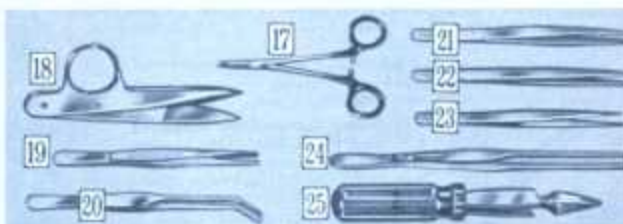

17 Scissor Clamps. Use as heat sinks, for handling or holding small parts in assembly, solder work. Straight end. Serrated jaws. Locking notches. 5 inches long.

9 KT 45018—Wt. 4 oz. \$4.49

18 Electronic Scissors. Use to snip fine wire. Fits palm of hand for a comfortable grip. Made of sturdy steel. 5 inches long.

9 KT 45337—Wt. 3 oz. \$3.99

Standard Design Scissors (not shown). 5 inches long.

9 KT 45338—Wt. 3 oz. \$2.99

19 CRAFTSMAN straight-end Tweezers. Nickel-plated, tempered spring steel. 6 inches long.

9 KT 4459—Shpg. wt. 4 oz. 89c

20 CRAFTSMAN bent-end Tweezers. Made of nickel-plated, tempered spring steel. 6 $\frac{1}{2}$ inches long.

9 KT 4460—Shpg. wt. 4 oz. 89c

21 Boley-pattern Precision Tweezers. AA. For extra fine work. Hardened bevel points. Nickel-plated steel. 5 inches long.

9 KT 4566—Shpg. wt. 3 oz. 99c

22 Swiss-pattern Precision Tweezers. For extra fine work. Stainless steel, light tension. 5 $\frac{1}{2}$ inches long.

9 KT 4568—Shpg. wt. 3 oz. \$1.79

23 Swiss-pattern Precision Tweezers. For extra fine work. Stainless steel, non-magnetic. Hardened extra-fine points, light tension. 4 $\frac{1}{2}$ inches long.

9 KT 4569—Shpg. wt. 3 oz. \$2.19

24 Slide-lock Tweezers. Nickel-plated, serrated points. 5 inches.

9 KT 4567—Shpg. wt. 3 oz. \$1.49

25 Reversal Tension Tweezers. Press to open. Shockproof plastic handle for a firm, sure grip.

9 KT 45335—Shpg. wt. 3 oz. 79c



Soldering Aids . . . clean, scrape, loop, ream

27 Low Voltage Tester.

Shpg. wt. 5 oz.

9 KT 45120 \$1.99

28 Continuity Tester. Shpg.

wt. 5 oz.

9 KT 45119 \$1.99

29 Fork and Hook. Shpg.

wt. 3 oz.

9 KT 45173 89c

30 Fork and Brush. Shpg.

wt. 3 oz.

9 KT 45174 89c

31 Knife and Brush. Shpg.

wt. 3 oz.

9 KT 45175 89c

32 Fork and Reamer.

Shpg. wt. 3 oz.

9 KT 45176 89c



CRAFTSMAN Special-duty Pliers

- 1 Arc-joint Pliers. 16 inches long. 4-inch jaw capacity. Pipe wrench type teeth grip work securely. Adjusts to 11 different positions. Single-hand grip. 4-inch jaw opening. Forged alloy steel is nickel-chrome plated to resist rust. Plastic-coated handles. 9 KT 45273—Shipping weight 2 pounds 12 ounces. \$4.89
 - 2 Heavy-duty Plier Wrench. Thin, wide-angle nose gets into tight places where a pipe wrench won't. Long handles. 7 positive positions—guide stop holds jaw setting—won't slip. Opens to 2 inches. Forged alloy steel is heat-treated, tempered, polished and chrome plated. Meets Fed. Specs. GGG-P-471c. 10½ in. over-all. 9 KT 4471—Shipping weight 1 pound 3 ounces. \$2.39
 - 3 Arc-joint Pliers. Machine-milled curved joint track takes load off bolt. Teeth grip like a pipe wrench . . . force the work back into the jaws. 5 adjustments open up to 1½ inches. Chrome plated to resist rust. Meets Fed. Specs. GGG-P-471c. 9¾ inches long. 9 KT 4527—Shipping weight 1 pound. \$2.79
- Similar to above, but has 3 positions. 6 in. long. (Not shown.) 9 KT 4545—Shipping weight 7 ounces. 1.99

All CRAFTSMAN Pliers have

- 1 Forged special alloy steel for extra strength, longer life
- 2 Jaws accurately machine milled for non-slip grip



You get superb professional quality

- 4 Wide-jaw Diagonal-cutting Pliers. 7 inches long. Cuts BX cable. Meet Federal Specifications GGG-P-471c, Type IV, Class 2. 9 KT 4508—Shipping weight 10 ounces. \$3.79
- 5 Curved-jaw Diagonal Pliers. 8 inches long. 9 KT 4599—Shipping weight 13 ounces. \$3.99
- 6 Lineman's Pliers. Heavy duty. Beveled nose, side cutting. Meet Federal Specs. GGG-P-471c, Type IX, Class 1, Style A. Knurled grips. 9 KT 45180—7 in. long. Shpg. wt. 12 oz. \$3.69
- 9 KT 45181—8½ in. long. Shpg. wt. 1 lb. 2 oz. 4.59
- 7 Diagonal-cutting Pliers. For use on switchboards, ignition systems, etc. Handles are plastic covered for comfortable, firm grip. Each plier is individually fitted to assure uniform cutting action. Jaws induction hardened. Meet Federal Specifications GGG-P-471c, Type IV, Class 1, Style B. Plastic grips. 9 KT 45060—5 in. Wt. 6 oz. \$3.29
- 9 KT 45061—6 in. Wt. 8 oz. 3.49
- 9 KT 45062—7 in. Wt. 10 oz. 3.79
- 8 Slip-joint Side-cutting Pliers. Forged hardened and tempered alloy steel. Two adjustments. Honed cutting edges. 7¾ inches long. 9 KT 4507—Shpg. wt. 12 oz. \$2.99


- 9 Truarc Convertible Retaining Ring Pliers. Use either to compress internal-type retaining rings or to expand external-type retaining rings . . . converts easily. Handles 9 types of retaining rings. Small. Used with 109 sizes. 9 KT 45350—Wt. 5 oz. \$3.79
- Large. Used with 95 sizes. 9 KT 45351—Wt. 8 oz. 4.29

- 10 Nail-cutting Nippers. Forged tempered steel. Polished head, hand-honed cutting edges. Ideal for concrete form builders, carpenters, etc. 14-inch size will cut a 16-penny nail. 10 inches long. 9 KT 4524—Wt. 1 lb. 4 oz. \$3.49
- 14 inches long. 9 KT 4523—Wt. 2 lbs. 8 oz. 4.29

- 11 End Cutting Nippers. Drop forged alloy steel, heat treated and tempered. For cutting, twisting, flush cuts, trimming tile. Fully ground, polished head. Overall length 6 in. Made in Japan. 9 KT 3076—Wt. 8 oz. \$1.19

- 12 Wire and Cable Stripper. Fully automatic . . . just squeeze easy-grip handles together. Will not crush even fine strand wire. Strips 8 to 22-gauge wire. Interchangeable steel blades, precision ground for clean and accurate work. 9 KT 4598—Wt. 14 oz. \$4.99

- 13 Bolt and Rod Cutter. Center cut. Tempered. Alloy steel jaws. Compound leverage. Cut ½-in. soft or ¼-in. hard bolts and rods. Over-all length 24 in. Jaw bolts and connecting bolts reverse to left-hand threads . . . prevents rotation. Adjustable handles. 99 KT 6568C—Wt. 7 lbs. \$15.99

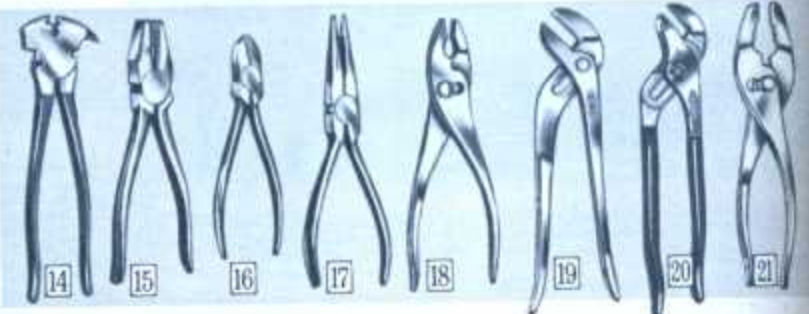

CRAFTSMAN and Low-priced Pliers for special jobs

- 14 CRAFTSMAN Fence Pliers. Drive, pull staples; stretch, cut, splice wire. Can be used as hammer. From W. Germany. 10¾ in. 9 KT 45225—Shpg. wt. 1 lb. 14 oz. \$2.99
- 15 Lineman's Cutting Pliers. Bevel nose. Honed side cutter. Polished head. 7 inches long. Made in Japan. 9 KT 3079—Shpg. wt. 12 oz. \$1.99
- 16 Diagonal-cutting Pliers. Beveled, ground cutting edges. From Japan. 6 in. long. 9 KT 3074—Shpg. wt. 7 oz. \$1.79
- Diagonal-cutting Pliers. (Not shown.) With honed cutters. Made in Japan. 6 inches long. 9 KT 30813—Shpg. wt. 7 oz. \$1.09
- 17 Long-nose Pliers. Drop forged. Polished head. Side cutters hand-honed for close work. Made in Japan. 6 inches long. 9 KT 3077—Shpg. wt. 7 oz. \$1.79
- Long-nose Pliers. (Not shown.) Forged steel. Made in Japan. 6 inches long. 9 KT 30803—Shpg. wt. 7 oz. \$1.09
- 18 Slip-joint Pliers. Made of drop forged, heat-treated high carbon steel. For general purpose use. Made in Japan. 6 inches long. 9 KT 30701—Shipping weight 8 oz. 89c
- 4 inches long. 9 KT 30702—Shipping weight 11 oz. 99c
- 19 Utility Pliers. Thin jaws get into tight places. Long handle gives you extra leverage. 5 adjustments. Drop forged. Deep milled jaws provide non-slip grip. Made in Japan. 9¾ inches long. 9 KT 3072—Shipping weight 15 ounces. \$1.49
- 20 Sears Arc Joint Pliers. Five adjustments. 1½-inch jaw span. Drop forged. 10-in. overall. Made in Japan. 9 KT 30723—Shpg. wt. 15 oz. \$1.99
- 6 adjustments. 2-in. jaw span. 12-in. long. 9 KT 30724—Shpg. wt. 1 lb. 5 oz. \$2.99
- 21 Thin-nose Pliers. Thin jaws. 2 adjustments. Drop forged, high carbon steel. Deep milled jaws. Knurled handles. Made in Japan. 6 inches long. 9 KT 3071—Shipping weight 7 oz. 89c

These 4 Big Features

3 Precision fitted joints open and close freely

4 Extra-large rivet, hardened and tempered



when you buy CRAFTSMAN Pliers

REG. U.S. PAT. OFF.

1 Battery Pliers. 22° angle head. 2 adjustments. 0 to 1/4-inch capacity. Pipe-wrench-type teeth. 7 inches long.

9 KT 44763—Shipping weight 9 ounces. \$1.49

2 Thin-nose, Slip-joint Pliers. Let you get into tight spaces. 2 adjustments. Drop-forged alloy steel, chrome plated. . . resist rust.

Have wire cutter. 5 1/2 in. long. Exceed Fed. Specs. GGG-P-471c, Type II, Class 2, Style B. 9 KT 4537—Shipping weight 6 ounces. \$1.39

3 Ignition Pliers. 40° angle jaws; 0 to 1/4-inch capacity. Thin jaws let you turn small nuts in tight spots. 3 adjustments. Jaws serrated. . . won't slip. Chrome plated. . . resist rust.

Exceed Federal Specifications GGG-P-471c, Type II, Class 1, Style B. 5 inches long. 9 KT 4513—Shipping weight 4 ounces. \$1.19

4 Slip-joint Pliers. Double-curved jaws grip 7/16 or 1 in. with equal force. 2 adjustments. Chrome plated. Cuts wire. Exceed Fed. Specs. GGG-P-471c, Type II, Style A, Class 2.


9 KT 45360—6 1/2 in. Wt. 8 oz. \$1.49
9 KT 45361—8 in. Shpg. wt. 12 oz. 1.79

5 Bent Needle-nose Pliers. Ideal for work in cramped spaces. Exceed Fed. Specs. GGG-P-471c, Type XII, Class 1, 5 1/2 in. long. Plastic grips.

9 KT 4468—Shpg. wt. 7 oz. \$3.29

6 End-cutting Nippers. Use for heavy cutting and twisting. Exceed Fed. Specs. GGG-N-350a, Type 1, Class 2, Style A, 6 inches long. Plastic grips.

9 KT 4502—Shpg. wt. 10 oz. \$3.49

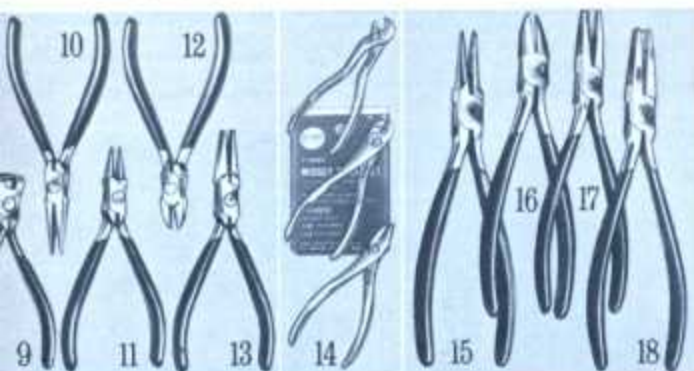

Midget and Electronic Pliers

(9 thru 13) CRAFTSMAN Midget Pliers. Designed for bench and instrument work, small components. . . wherever delicate work is required. Over-all length 4 1/2 in. Forged from tough alloy steel. . . heat treated for strength.

Edges hand-boned for precision cutting. Plastic-covered handles for firm grip.

9 End-cutting Pliers. 9 KT 45913—Wt. 5 oz. \$3.59

10 Long-nose Pliers. 9 KT 45923—Wt. 4 oz. 3.09

11 Round-nose Pliers. 9 KT 45953—Wt. 4 oz. 3.19

12 Diagonal-cutting Pliers. 9 KT 45903—Wt. 4 oz. \$3.29

13 Flat-nose Pliers. 9 KT 45943—Wt. 5 oz. 3.09

14 3-pc. Midget Plier Set. Includes: slip-joint, angle-nose and long-nose pliers. Ideal for work on ignition systems, carburetors, other precision jobs.

Hardened steel. Milled jaws. . . handles are knurled. 4 1/4 inches long over-all. In convenient, plastic pouch. (Not CRAFTSMAN.)

9 KT 4488—Wt. 9 oz. Set \$1.79

(15 thru 18) CRAFTSMAN Electronic Pliers. Professional quality. For work on terminal boards, tube chassis, switches, sockets, etc. Long, slender heads to get in tight places.

Cutting edges hand honed for precision cutting. Polished, drop-forged steel. Handles are plastic covered for a firm, comfortable grip. 8 inches long over-all.

Shipping weight each 9 ounces.

Catalog Number	Type	Each
(15) 9 KT 4505	Needle-nose round	\$3.29
(16) 9 KT 4539	Thin-head diagonal	3.69
(17) 9 KT 4528	Transverse end	3.49
(18) 9 KT 4509	Duck-bill flat	3.29



7 Tools in One!

Low as
\$1.99

CRAFTSMAN
REG. U.S. PAT. OFF.

Locking Plier-Wrench

Actually gives you over 1-ton positive bulldog grip

Exceeds Fed. Specs.* more than 100% for terminal strength. Handy, fingertip release. Slight upward pressure on release lever unlocks the wrench's jaws.

Pliers, clamp, gripping tool, pipe or locking wrench, adjustable wrench, portable vise—all in ONE tool!

Has tremendous gripping power for removing broken or rusted studs, stubborn nuts, etc. Forged steel jaws get into tight places. Spun-rivet assembly for strength and rigidity. Plated finish resists rust.

Catalog Number	Maximum length	Jaw capacity	Shipping weight	Each
7 Locking Plier-Wrench with straight jaws.				
9 KT 45340	7 1/2 in.	1 1/2 in.	1 lb. 1 oz.	\$1.99
9 KT 45341	10 in.	1 1/2 in.	1 lb. 8 oz.	2.39
8 With double-curved jaws. Made for round stocks.				
9 KT 45960	7 1/2 in.	1 1/2 in.	1 lb. 1 oz.	\$2.09
9 KT 45961	10 in.	1 1/2 in.	1 lb. 8 oz.	2.49

*GGG-W-64B, Type I Class 1, Style A and Class 2, Style A

CRAFTSMAN Metal-cutting Snips, Shears

19 Combination Snips. Forged, high-carbon steel. Heat-treated for hardness.

10 inches long. 2 1/4-inch cut.

9 KT 45470—Shpg. wt. 1 lb. 2 oz. \$3.09

12 inches long. 3-inch cut.

9 KT 45471—Shpg. wt. 1 lb. 12 oz. 3.89

Straight-cut Snips (not shown). These snips are not CRAFTSMAN brand.

10 inches long. 2 1/4-inch cut.

9 KT 45430—Shpg. wt. 1 lb. 2 oz. \$2.29

12 inches long. 3-inch cut.

9 KT 45431—Shpg. wt. 1 lb. 8 oz. 2.79

20 Light-metal Shears. For wire, tin, bronze steel sheets up to .025 in. thick. 1 1/4-in. cut. Drop-forged steel blades.

Plastic-coated handles. 6 1/2 in. long over-all.

9 KT 4597—Shipping weight 7 oz. \$2.39

21 Compound-leverage Snips. More jaw power. Austempered alloy-steel blades, chrome-plated. Serrated edges. Plastic-covered grips. 1 1/4-inch cut. 10 inches long over-all.

Shipping weight 1 pound 2 ounces.

9 KT 4273—Cuts right only. \$4.49

9 KT 4274—Cuts left only. 4.49

9 KT 4275—Cuts straight, right or left. 4.49

Compound-leverage Snips (not illustrated). Not CRAFTSMAN. Cuts right or left. Polished, serrated steel blades. 9 inches long.


9 KT 4542—Shipping weight 14 oz. \$1.59

22 Duck-bill Snips. Forged blades. For straight, irregular and circular cuts.

9 KT 45460 and 9 KT 45462 meet Federal Specifications GGG-S-291d, Type II, Class 3.

Catalog No.	Cut	lgth.	Shpg. wt.	Each
9 KT 45460	1 1/4 in.	7 in.	9 oz.	\$2.19
9 KT 45461	2 1/2 in.	10 in.	1 lb. 2 oz.	3.19
9 KT 45462	3 in.	12 in.	1 lb. 12 oz.	3.99



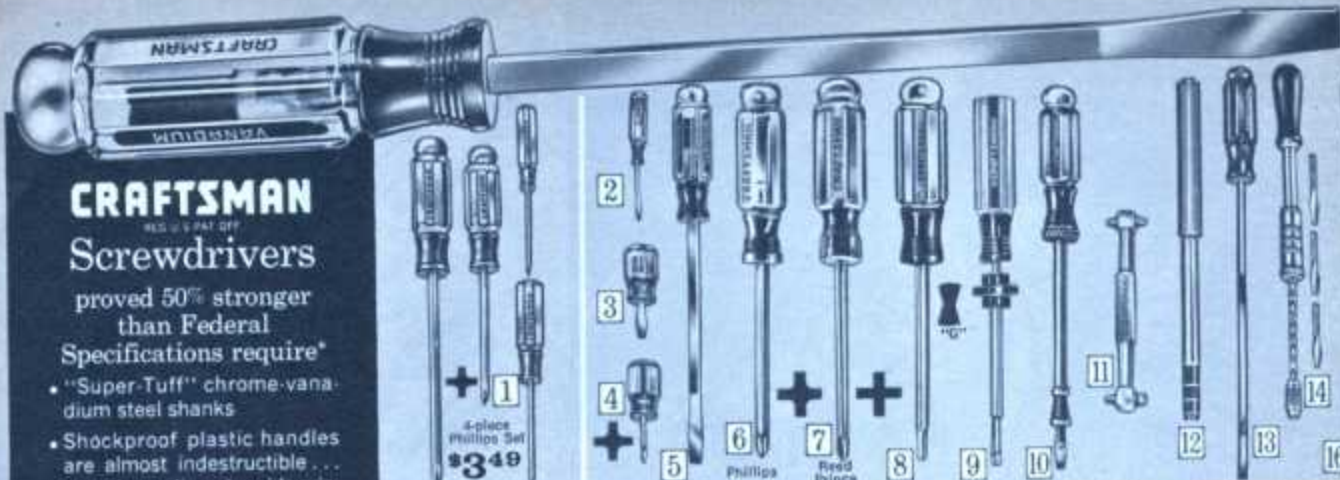

CRAFTSMAN

Screwdrivers

proved 50% stronger
than Federal
Specifications require*

- *"Super-Tuff" chrome-vanadium steel shanks
- Shockproof plastic handles are almost indestructible... extra large diameter aids gripping for non-slip action
- Shanks anchored deep in handles to prevent loosening
- *GGG-S-121d



4-piece set
\$2.99

CRAFTSMAN Screwdriver Set

Perfect "fix-it" set for your home or shop. You can be ready with the right size screwdriver for most regular small-head screws. Includes 1/4 x 6-inches, 3/16 x 4-inches, 1/4 x 4-inches, and pocket-size screwdriver.
9 KT 4150—Wt. 13 oz. Set \$2.99

1 4-piece Phillips Set, Sizes: No. 0-2 1/4, No. 1-3, No. 2-4, No. 3-6 in. 9 KT 4147—Shipping wt. 15 oz. Set \$3.49

2 Pocket Screwdriver, 1 1/4 x 2-in. blade. Standard bit. Pocket clip. 9 KT 4142—Shipping weight 4 oz. 49c

3 Stub Screwdriver, 1/4 x 1 1/4-inch blade; standard bit. 3 3/4 in. long. 9 KT 4131—Shipping weight 5 oz. 79c

4 Phillips Stub Screwdriver, 1 1/4-inch blade. No. 2 bit. Length, 3 3/4 in. 9 KT 4118—Shipping weight 4 oz. 99c

5 Individual Heavy-duty Screwdrivers. See blade sizes in table.

Catalog Number	Blade, inches	For screws	Shank, wt.	Each
9 KT 41480	1/4 x 4	Ex. small	2 oz.	79c
9 KT 41481	1/4 x 4	Small	4 oz.	\$1.09
9 KT 41482	1/4 x 4	Small	6 oz.	1.19
9 KT 41483	1/4 x 4	Medium	5 oz.	1.09
9 KT 41484	1/4 x 6	Medium	6 oz.	1.19
9 KT 41485	1/4 x 12	Medium	10 oz.	1.39
9 KT 41486	3/8 x 1 1/2	Large	7 oz.	1.19
9 KT 41487	3/8 x 6	Large	9 oz.	1.49
9 KT 41488	3/8 x 12	Ex. large	1 lb.	2.09

6 Phillips Screwdrivers. Alloy steel. Milled flutes.

Catalog Number	Size	For screws	Blade, in.	Wt. oz.	Each
9 KT 41293	0	Ex. small	2 1/2	2	69c
9 KT 41294	1	Small	3	4	89c
9 KT 41295	2	Medium	4	5	\$1.09
9 KT 41296	2	Medium	6	6	1.29
9 KT 41297	3	Large	6	6	1.39
9 KT 41298	4	Ex. large	8	10	1.59

7 Reed Prince. For cross-recessed screws. 4 x 1/4-in. diam. blade. 9 KT 4114—Shipping weight 5 oz. \$1.29

8 Clutch-head Screwdrivers. For type "G" (butterfly) screws.

Cat. No.	Shank	Bit	Wt.	Each
9 KT 41131	3/16 x 3 in.	1/4 in.	4 oz.	\$1.49
9 KT 41132	3/16 x 3 in.	1/4 in.	4 oz.	1.49
9 KT 41133	3/16 x 4 in.	1/4 in.	5 oz.	1.69
9 KT 41134	3/16 x 5 in.	1/4 in.	7 oz.	1.79

9 Wedge-type Screw-holding Drivers. Tip adjusts, wedges in slot.

Cat. No.	Shank	Bit	Wt.	Each
9 KT 41281	1/4 x 3 in.	1/4 in.	3 oz.	\$1.09
9 KT 41282	1/4 x 3 in.	1/4 in.	4 oz.	1.29
9 KT 41283	1/4 x 4 in.	1/4 in.	5 oz.	1.39
9 KT 41284	1/4 x 6 in.	1/4 in.	6 oz.	1.49

10 Screw-holding Drivers. Ferrule holds screw for one-hand operation.

Catalog No.	Blade size	Wt.	Each
9 KT 41122	1/4 x 2 1/2 in.	3 oz.	89c
9 KT 41123	1/4 x 4 in.	3 oz.	99c
9 KT 41124	3/8 x 5 in.	6 oz.	\$1.29
9 KT 41125	3/8 x 7 in.	6 oz.	1.39

11 Offset Screwdriver, 4 blades at 4 different angles for tight places.

9 KT 4110—Shipping weight 6 oz. \$1.09

12 Screw Starters. Start or remove all size screws in inaccessible places. Grip the screw inside screw slot with a 15-pound pull. Will release automatically as screw is tightened.

Cat. No.	Blade size	Wt.	Each
9 KT 41021	2 1/2 in. long. Wt. 3 oz.	3 oz.	\$1.49
9 KT 41022	3 in. long. Wt. 2 oz.	2 oz.	1.59
9 KT 41023	4 in. long. Wt. 3 oz.	3 oz.	1.69

13 Electronics Screwdriver. Extra long and extra slim. Fits into narrow or recessed spaces. Blade fits all standard-type slotted screws. Square shank of chrome-vanadium tool steel... chrome-plated. Plastic handle. 1/4 x 8-in. blade, 10 1/2 in. long over-all. Vinyl sleeve simulates shank. 9 KT 4138—Shipping weight 4 oz. 99c


14 Standard-size Automatic Return Screwdriver, 19 inches long overall when extended. Locks when closed. 3 bits (3/16, 1/4, 5/16 in.). Turns right, left. Made in W. Germ. 9 KT 3101—Shipping wt. 1 lb. 13 oz. \$6.99

3 Extra Screwdriver Bits, 3/16, 1/4, 5/16 in. For 9 KT 3101, former 9-4141. 9 KT 4198—Shipping wt. 6 oz. Set \$1.19

15 Small-size Automatic Return Screwdriver, 10 inches long over-all when extended with bit. 1/4-inch bit. Locks when closed. Turns right or left. Made in West Germany. 9 KT 3100—Shipping wt. 12 oz. \$2.99

Extra Screwdriver Bit Set. 3 replacement bits; 3/16-in., 1/4-in. and No. 2 Phillips type. For 9 KT 3100; former numbers 9-3180 and 9-3461. 9 KT 4153—Shipping wt. 4 oz. Set \$1.29

16 3-pc. Phillips Bit Set, Sizes 1, 2, 3. Fits 9 KT 3101, former 9-3470, 9-4141; Yankee 30A; 130A; Millers Falls 61A; 610A; Greenlee 448; 458 automatic screwdrivers. 9 KT 4115—Shipping wt. 6 oz. Set \$1.59

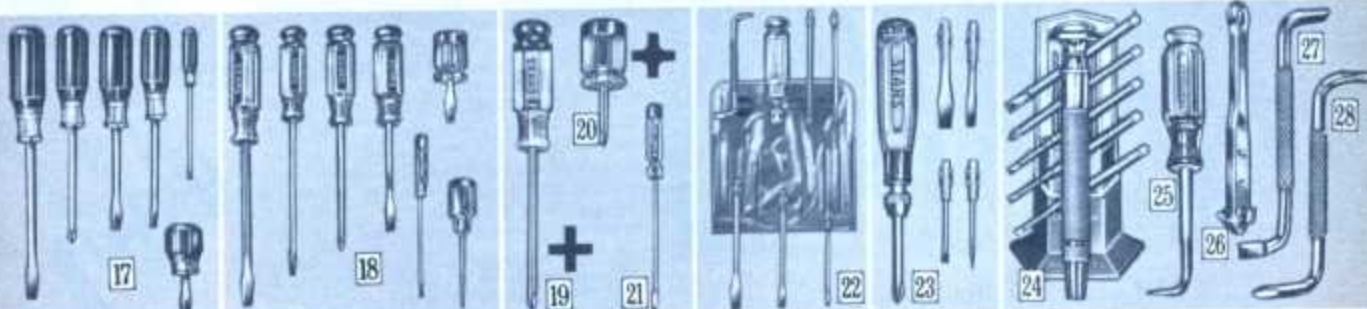

17 6-pc. Set. Rubber grips. High carbon-steel blades, fully-ground. Includes: 1/4 x 4-in. cabinet; 1/4 x 1 1/2-in. stub; 1/4 x 4-in. mechanic's; 3/16 x 6-in. heavy duty; 1/4 x 3 3/4-in. electrician's; and No. 2 recessed. 9 KT 4146—Wt. 1 lb. 8 oz. Set \$3.19

18 7-pc. Set. High-carbon-steel blades, fully ground. Plastic handles. 4 1/2-in. scratch awl. 5 screwdrivers (1/4 x 3 3/4 in., 3/16 x 6 in., 1/4 x 4 in., 3/16 x 6 in., stub 1 1/2 in. blade). No. 2 Phillips type. 9 KT 4127—Wt. 1 lb. 6 oz. Set \$2.99

Cat. No.	Blade in.	Type	Wt. oz.	Each
9 KT 41491	1/4 x 4	Standard	4	49c
9 KT 41494	1/4 x 8	Standard	8	99c
9 KT 41512	3/16 x 4	Cabinet	3	39c
9 KT 4154	1/4 x 3 1/4	Pocket	2	19c

19 Phillips-type Screwdriver. Size No. 2. Fully-ground blade for longer life... tough high-carbon steel. Plastic handle for added shock protection. 4-in. blade; 3 3/4-in. long over-all. 9 KT 41662—Shipping weight 4 oz. 69c

20 Phillips-type Stubby Screwdriver. Size No. 2. Lets you get to hard-to-reach Phillips screws. Plastic handle. 1 1/4-inch blade in high-carbon steel, fully ground. 3 1/4 inches long over-all. 9 KT 4167—Shipping weight 3 oz. 59c

21 Pocket-size Screwdriver. Fits most small-size, standard screws... gets into tight places. 2-inch fully-ground blade of high carbon steel. Amber plastic handle. Pocket clip. 9 KT 4122—Shipping weight 2 oz. 19c

22 6-piece Screwdriver Set. Interchangeable plastic handle. Offset screwdriver and 5 steel blades. With standard bits 1/4 x 2 1/2 in., 1/4 x 4 in., 1/4 x 4 3/4 in.; Phillips bits No. 1, No. 2. Plastic pouch. 9 KT 4181—Shipping weight 10 oz. Set \$1.69

23 5-in-1 Screwdriver Set. Clear plastic handle stores blades. Aluminum chuck, zinc plated. 5 fully ground blades of high carbon steel; 1/4-inch midjet, 3/16-inch cabinet, 1/4-inch mechanic's, No. 2 Phillips type, gimlet screw starter. 9 KT 4108—Shipping weight 9 oz. Set \$1.09

24 CRAFTSMAN 6-pc. Precision Screwdriver Set. Nickel-plated knurled body, swivel head. Removable blade held by threaded chuck. 3 x 1/4-in. body; 3 blades: No. 0-100; No. 2-070; No. 3-055; No. 4-040; Phillips blade. 3 3/4 in. over-all. Plastic stand. 9 KT 4107—Shipping weight 4 oz. Set \$1.59

25 CRAFTSMAN Corker-key Extractor. Cork-screw action. Steel hook plastic handle. 7 inches long. 9 KT 4319—Shipping weight 8 oz. 99c

26 CRAFTSMAN Ratchet Offset Screwdrivers. Steel body, nickel-plated. Alloy-steel blades. Right or left ratchet. Tightens or loosens small screws easily. Reverses instantly. For 1/4 and 3/8-inch slotted screws. 9 KT 4117—Shipping weight 3 oz. \$1.09

For No. 1 and No. 2 Phillips screws 9 KT 4119—Shipping weight 3 oz. \$1.29

For No. 2 Phillips, 1/4-in. slotted screws 9 KT 4116—Shipping weight 3 oz. \$1.29

27 Offset Screwdriver. High-carbon steel blade, fully ground. 2 1/2 in. 9 KT 4120—Shipping weight 4 oz. 25c

28 Phillips-style Offset Screwdriver. Tempered steel with No. 1 bit on one end, No. 2 bit on the other. 9 KT 4126—Shipping weight 2 oz. 39c



CRAFTSMAN Punches and Chisels give you 6 big features...

- Forged from chrome-vanadium-alloy steel
- Head end chamfered to reduce chipping
- Tempered to hold sharp edges longer
- Chrome plated to fight off rust
- Head designed to take solid drive
- Square stock gives firm, easy gripping

Individual CRAFTSMAN Punches and Chisels

1 Standard-length Cold Chisels. For cutting bolts and rivets.

Catalog Number	Edge (inch)	Stock (inch)	Length (inch)	Shpg. wt.	Each
KT 42971	1/2	1/2	4 1/2	4 oz.	59c
KT 42972	3/8	3/8	4 1/2	4 oz.	69c
KT 42973	1/2	1/2	6	5 oz.	79c
KT 42974	3/8	3/8	6 1/2	7 oz.	89c
KT 42975	1/2	1/2	7	14 oz.	99c
KT 42976	3/8	3/8	7 1/2	1 lb.	\$1.29

2 Extra-long Cold Chisels.

9 KT 42991	1/2 x 12 in. Wt. 1 lb.	\$1.09
9 KT 42992	3/8 x 18 in. Wt. 1 lb. 4 oz.	1.29
9 KT 42993	1/2 x 12 in. Wt. 1 lb. 4 oz.	1.29

3 Pry Bar, 16-in. long, 3/4-in. stock.

9 KT 4283	Shpg. wt. 1 lb. 2 oz.	\$1.39
-----------	-----------------------	--------

4 Center Punches. Meet Federal Specifications GGG-P-831d.

9 KT 42861	1/2 x 4 1/2 in. Shpg. wt. 3 oz.	59c
9 KT 42862	3/8 x 4 1/2 in. Shpg. wt. 5 oz.	69c

5 Pin Punches. Meet Federal Specifications GGG-P-831d.

Catalog Number	Point size	Length	Shpg. wt.	Each
KT 42881	1/8 in.	4 1/2 in.	3 oz.	59c
KT 42882	3/16 in.	4 1/2 in.	3 oz.	59c
KT 42883	1/4 in.	4 1/2 in.	3 oz.	59c
KT 42884	5/16 in.	4 1/2 in.	4 oz.	59c
KT 42885	3/8 in.	5 1/2 in.	5 oz.	69c
KT 42886	1/2 in.	5 1/2 in.	6 oz.	69c

6 Rolling Wedge Bar, 1 rolling, 1 pointed end, 16 inches long, 3/4-in. stock.

9 KT 42892	Shipping weight 1 lb. 7 oz.	\$2.49
------------	-----------------------------	--------

7 Cape Chisel. Cuts keyways, 1/4 x 1/2 in.

9 KT 4312	Shipping weight 4 ounces.	79c
-----------	---------------------------	-----

8 Round-nose Cape Chisel. 4 1/2 in. long. Cuts 1/2-circle grooves, 1/8-in. edge.

9 KT 4316	Shipping weight 5 ounces.	79c
-----------	---------------------------	-----

9 Diamond-point Chisel. Cuts V-grooves. 4 1/2 in. long, 3/4-in. stock. Meet Fed. Specs. GGG-C-313a.

9 KT 4320	Shipping weight 5 ounces.	79c
-----------	---------------------------	-----

10 Line-up Punches. Tempered and hardened at ends to take heavy pounding.

Cat. No.	Size	Shpg. wt.	Each
9 KT 42901	1/2 x 1/2 x 7	6 oz.	79c
9 KT 42902	3/4 x 1/2 x 9	7 oz.	89c
9 KT 42903	1/2 x 1/2 x 12	15 oz.	\$1.19
9 KT 42904	3/4 x 1/2 x 15	9 oz.	1.09

11 Prick Punches.

9 KT 42841	1/2 x 4 1/2 in. Wt. 3 oz.	59c
9 KT 42842	1/2 x 6 in. Shpg. wt. 6 oz.	69c

12 Solid Machine Punches.

Cat. No.	Point, in.	Stock, in.	Wt. oz.	Each
9 KT 43141	1/2	3/4 x 4 1/2	5	59c
9 KT 43142	3/8	1/2 x 6	9	69c
9 KT 43143	1/4	3/8 x 7	12	79c

13 Star Drills. Chrome-vanadium-alloy steel, chrome plated, 12 inches long.

Cat. No.	Bit (in.)	Shpg. wt.	Each
9 KT 43051	1/8	3 oz.	69c
9 KT 43052	3/16	5 oz.	79c
9 KT 43053	1/4	6 oz.	79c
9 KT 43054	5/16	8 oz.	89c
9 KT 43055	3/8	13 oz.	99c
9 KT 43056	1/2	1 lb. 2 oz.	\$1.19

14 CRAFTSMAN 12-piece Punch and Chisel Set. Handles all needs of master mechanic. Includes 1/4-in. cape chisel, 1/8-in. round nose cape chisel, 3/8-in. diamond-point chisel, 3 cold chisels (1/4, 3/8, 1/2-in.), 3/4-in. center punch, 3/4-in. solid punch, 3/4 x 7-in. drift punch, 3 pin punches (1/8, 1/4, 3/8-in.). In divided plastic pouch.

9 KT 4303	Shipping weight 1 lb. 14 oz.	Set \$5.99
-----------	------------------------------	------------

15 CRAFTSMAN 3-pc. Cold Chisel Set. Three most-used sizes: 1/4, 3/8, 1/2-in. Plastic pouch.

9 KT 4309	Shipping weight 8 ounces.	Set \$1.59
-----------	---------------------------	------------

16 CRAFTSMAN 4-piece Pin Punch Set. 1/8, 1/4, 3/8, 1/2-in. pin punches. Plastic pouch.

9 KT 4311	Shipping weight 13 ounces.	Set \$2.29
-----------	----------------------------	------------

17 CRAFTSMAN 5-piece Punch Set. Has 4 most-used pin punches (1/8, 1/4, 3/8, 1/2-in.) and one 3/4-in. drift punch. Divided plastic pouch.

9 KT 4285	Shipping weight 12 ounces.	Set \$2.19
-----------	----------------------------	------------

18 CRAFTSMAN 5-piece Punch and Chisel Set. With 5 most-used sizes: 1/4, 3/8, 1/2-in. cold chisels, 3/4-in. center punch, 3/4 x 7-in. pin punch, 3/4 x 7-in. solid punch. In divided plastic pouch.

9 KT 4302	Shipping weight 1 lb. 6 oz.	Set \$2.69
-----------	-----------------------------	------------

19 Low-priced Punch and Chisel Set, 5 pieces. Not CRAFTSMAN. Does not have highly polished finish. Hardened alloy steel. 3/4-in. center punch, 3/4 x 7-in. solid punch, 3/4 x 7-in. solid punch, 3/4 x 7-in. solid punch. Plastic pouch.

9 KT 4301	Shipping weight 1 lb. 2 oz.	Set \$1.49
-----------	-----------------------------	------------



CRAFTSMAN Holders help keep tools and nails handy

20 Carpenter's leather Apron. 4 nail pockets, 2 tool pockets. 2 slots, 2 side loops. Web belt.

9 KT 43147	Shipping weight 2 lbs.	\$10.99
------------	------------------------	---------

21 Mechanic's 6-tool leather Holder. Hammer loop, 4 tool loops. "T" tape chain, 1/2-in. harness snap. 2 1/2 x 9 inches long.

9 KT 4349	Shipping weight 8 oz.	\$1.29
-----------	-----------------------	--------

22 5-pocket cowhide Tool Pouch. 3 screwdriver slots. Big side loop. "T" tape chain. Small tool harness snap. Wide tunnel belt loops. Rivet-reinforced at points of strain. 8 x 10 in. Tan color.

9 KT 4380	Shpg. wt. 1 lb. 8 oz.	\$5.99
-----------	-----------------------	--------

23 5-pocket leather Nail Bag. Hammer loop. 10-in. inner, 6-in. outer pockets. 2 tool slots, tunnel belt loop. 9 x 12 inches. Cowhide.

9 KT 43146	Shipping weight 15 oz.	\$4.59
------------	------------------------	--------

24 9 1/2 x 9-in. 5-pocket Holder. 5 x 3 1/2-in. center, 2 open-end, 2 flared front pockets. "T" tape holder. Small tool harness snap. 1 1/2-in. belt slots. Rivet-reinforced. Cowhide.

9 KT 43445	Shipping weight 13 oz.	\$4.49
------------	------------------------	--------

25 6-pocket electrician's cowhide Pouch. 4 pouched front pockets. 2 inside pockets. Hammer loop. "T" tape chain. Capped rivets.

9 KT 43805	Shipping weight 15 oz.	\$3.99
------------	------------------------	--------

26 3-pocket cowhide Tool Holder. 2 small pockets, 1 large. Fiber reinforced. 6 x 5 1/4 x 1 1/2 inches.

9 KT 4340	Shipping weight 9 oz.	\$2.99
-----------	-----------------------	--------

27 Single-tool leather Pocket. Rivet corners. 6 x 4 x 3/4-in. pocket; 7 1/2-in. back. Belt slots.

9 KT 4314	Shipping weight 8 oz.	\$1.29
-----------	-----------------------	--------

28 Cowhide Hammer Holder. Large loop and belt slots. 6 x 3 1/2 in.

9 KT 4384	Shipping weight 4 oz.	49c
-----------	-----------------------	-----

Tool-holder cowhide Belt. Roller buckle; capped rivets. Leather loop. Fits 30-46 in. waists. (Not shown.)

9 KT 43853	Shipping weight 8 oz.	\$1.99
------------	-----------------------	--------

All CRAFTSMAN Taps and Dies are Kromedge-treated to stay sharp up to 5 times longer than ordinary cutters

Made of tempered alloy steel to exact tolerances of Metal Cutting Institute. Plated by special process with extra-hard chrome. Won't rust... require less cleaning. Cut smoother threads with less effort

40-piece Set **\$29.99**

28-piece Set **\$22.99**

1 40-piece Set, 17 cuts, 17 taps, 16 adjustable 1-in. round dies, 1 solid pipe die. See table below for sizes and types of threads for both taps and dies. With adjustable-guide die stock, tap-reamer wrench, tap wrench, screw pitch gauge, screwdriver. In sectioned plastic case.

Shipping weight 4 lbs. 9 oz.
9 KT 52091.....Set \$29.99

2 28-piece Set, 11 cuts, 10 taps, 10 adjustable round dies, 1 pipe tap, 1 solid pipe die. See sizes and types of threads below. Set includes one 1-inch adjustable-guide die stock, No. 4 tap wrench, tap-reamer wrench, thread gauge, screwdriver. Plastic case.

Shipping weight 4 lbs. 6 oz.
9 KT 5213.....Set \$22.99

59-piece Auto Mechanic's Set, (Not shown.) 23 cuts, 23 taps, 23 round dies (13 adjustable 1-in.; 8 adjustable 1 1/4-in.; 2 solid pipe dies). Thread sizes, types in table below.

3 screw extractors (sizes 1-5); 2 tap-reamer wrenches (Nos. 4, 6); 1 tap wrench (for Nos. 4-12 machine taps); 2 adjustable-guide die stocks (1, 1 1/4-in.); screwdriver, thread gauge, wood case. Shpg. wt. 14 lbs.
99 KT 5211C.....Set \$62.99

13-piece Set, (Not shown.) 5 cuts, 5 taps, 5 adjustable round dies. See table below for sizes and types of threads for both taps and dies in this set.

Set includes one 1-inch adjustable guide stock, No. 4 tap wrench. An economical set with most popular taps and dies for home, workshop, farm. Save yourself a great deal of time by repairing threads right on the job. Comes in sectioned plastic case.

Shipping weight 2 pounds 5 oz.
9 KT 5205.....Set \$9.99

Catalog No.	9 KT 52091	99 KT 5211C	9 KT 5213	9 KT 5205
Cuts	1/2-20	1/4-18	1/2-20	1/4-18
National	3/8-16	1/4-14	3/8-16	1/4-14
Coarse (UNF)	1/2-13	1/2-13	1/2-13	
threads		3/8-11	3/8-10	
Cuts	1/2-28	1/4-24	1/2-28	1/4-24
National	3/8-24	1/4-20	3/8-24	1/4-20
Fine (SAE)	1/2-20	1/2-20	1/2-20	1/4-18
threads		3/8-18	3/8-16	
Cuts Machine	4-40	8-32	8-32	8-32
Screw Threads	10-32	10-24	10-24	10-24
Pipe Thread	1/2-inch	1/2, 3/4-inch	1/2-inch	

23-piece Tap and Die Set

3 Ideal for auto mechanics, machinists, farm equipment repairmen. Buy this set now... add set 9KT52091 or 9KT5201 later for a complete 4-40 to 3/4-in. set. Includes 9 taps, 9 dies (1/2, 3/8, 1/2, 3/4-in. both National Coarse and National Fine (SAE), plus 1 1/4-inch pipe). All dies 1 1/4-in. diam. Adjustable guide die stock, tap reamer wrench, screw-pitch gauge, screwdriver. Case.

9 KT 5207—Shipping weight 8 pounds.....Set \$36.99

CRAFTSMAN Hex Dies fit wrenches, sockets

REG. U.S. PAT. OFF.

Repair or cut threads without die holder
... perfect for close, hard-to-reach jobs

41-piece Hex Set **\$29.99**

28-piece Hex Set **\$22.99**

4 41-piece Set. Ideal for the auto mechanic or anyone else working in tight places. Use with 1-in. sockets, open-end or adjustable-end wrenches. 17-cut set incl. 17 taps, 17 (1-in.) hex dies, 1 solid pipe die. See sizes, types of threads below. Adjustable-guide die stock, tap reamer wrench, 2 "T" tap wrenches, screw-pitch gauge, screwdriver. Sectioned plastic case.

9 KT 5201—Wt. 4 lbs. Box. Set \$29.99

5 28-piece Set, 11 taps, 11 dies, 1 solid pipe tap-and-die. Adjustable guide die stock, tap and reamer wrench, "T" handle tap wrench, screw-pitch gauge, screwdriver. All dies are 1-inch hexagon. See table below for sizes and types of threads for taps and dies. Case.

9 KT 5200—Wt. 3 lbs. 12 oz. Set \$22.99

15-piece Hex Die Set, (Not shown.) Eleven cuts. Dies are 1-inch hexagon. Includes die stock, screw pitch gauge, screwdriver. One solid pipe die. See table below for sizes, types of threads for taps and dies. Sectioned plastic case.

9 KT 5203—Wt. 2 lbs. 3 oz. Set \$11.99

14-piece Tap Set, (Not shown.) Eleven cuts. 1 solid pipe tap. With tap wrench, "T" handle wrench. Ideal for home workshop or auto mechanic. See table below for sizes and types of threads for all taps in this set. Complete in sectioned plastic case.

9KT5204—Wt. 2 lbs. 15 oz. Set \$11.99

Catalog No.	9 KT 5201	9 KT 5203	9 KT 5200	9 KT 5204
Cuts	1/2-20	1/4-18	1/2-20	1/4-18
National	3/8-16	1/4-14	3/8-16	1/4-14
Coarse (UNF)	1/2-13	1/2-13	1/2-13	1/2-13
threads				
Cuts	1/2-28	1/4-24	1/2-28	1/4-24
National	3/8-24	1/4-20	3/8-24	1/4-20
Fine (SAE)	1/2-20	1/2-20	1/2-20	1/4-18
threads				
Cuts Machine	4-40	8-32	8-32	8-32
Screw Threads	10-32	10-24	10-24	10-24
Pipe Thread	1/2-inch	1/2-inch	1/2-inch	1/2-inch



Hex-shaped Die Sets, Tap Sets for rethreading

For renewing coarse threads. Includes 8 National Coarse (USC) dies (one each in sizes $\frac{1}{8}$, $\frac{3}{16}$, $\frac{1}{4}$, $\frac{5}{16}$, $\frac{3}{8}$, $\frac{7}{8}$, $1\frac{1}{2}$, 2). Plastic case. 9 KT 52111—Wt. 6 oz. Set \$3.99

For restoring coarse threads. Includes 6 National Coarse (USC) taps (one each in sizes $\frac{1}{8}$, $\frac{3}{16}$, $\frac{1}{4}$, $\frac{5}{16}$, $\frac{3}{8}$, $\frac{7}{8}$). Plastic case. 9 KT 52113—Wt. 10 oz. Set \$3.29

For renewing fine threads (not shown). As above, but 8 dies are National Fine (SAE). Plastic case. 9 KT 52112—Wt. 6 oz. Set \$3.99

For restoring fine threads (not shown). As above, but 6 taps are National Fine (SAE). Plastic case. 9 KT 52114—Wt. 10 oz. Set \$3.29



Individual Taps and Dies

The same superb quality as those in the sets described at top of this page and on facing page.

Adjustable Round Dies					Taps					Hex Dies				
Size	Catalog No.	Diam.	Wt.	Price	Catalog No.	Wt.	Price	Catalog No.	Wt.	Price	Catalog No.	Wt.	Price	Catalog No.
National Coarse (USC) threads														
$\frac{1}{4}$ -20	9 KT 5226	1 in.	3 oz.	99¢	9 KT 5222	2 oz.	49¢	9 KT 5227	3 oz.	99¢	9 KT 5227	3 oz.	99¢	9 KT 5227
$\frac{1}{8}$ -18	9 KT 52260	1 in.	3 oz.	99¢	9 KT 52220	2 oz.	59¢	9 KT 52270	3 oz.	99¢	9 KT 52270	3 oz.	99¢	9 KT 52270
$\frac{1}{8}$ -16	9 KT 52261	1 in.	3 oz.	99¢	9 KT 52221	2 oz.	69¢	9 KT 52271	3 oz.	99¢	9 KT 52271	3 oz.	99¢	9 KT 52271
$\frac{1}{8}$ -14	9 KT 52262	1 in.	3 oz.	99¢	9 KT 52222	2 oz.	79¢	9 KT 52272	3 oz.	99¢	9 KT 52272	3 oz.	99¢	9 KT 52272
$\frac{1}{8}$ -13	9 KT 52263	1 in.	3 oz.	99¢	9 KT 52223	2 oz.	89¢	9 KT 52273	3 oz.	99¢	9 KT 52273	3 oz.	99¢	9 KT 52273
$\frac{1}{8}$ -12	9 KT 52264	1 in.	4 oz.	\$1.99	9 KT 52224	2 oz.	1.29	9 KT 52274	3 oz.	99¢	9 KT 52274	3 oz.	99¢	9 KT 52274
$\frac{1}{8}$ -11	9 KT 52265	1 in.	4 oz.	1.99	9 KT 52225	2 oz.	1.39	9 KT 52275	3 oz.	99¢	9 KT 52275	3 oz.	99¢	9 KT 52275
$\frac{1}{8}$ -10	9 KT 52266	1 in.	4 oz.	1.99	9 KT 52226	2 oz.	1.39	9 KT 52276	3 oz.	99¢	9 KT 52276	3 oz.	99¢	9 KT 52276
$\frac{1}{8}$ -9	9 KT 52267	1 in.	4 oz.	1.99	9 KT 52227	2 oz.	2.09	9 KT 52277	3 oz.	99¢	9 KT 52277	3 oz.	99¢	9 KT 52277
$\frac{1}{8}$ -8	9 KT 52268	1 in.	4 oz.	1.99	9 KT 52228	2 oz.	2.09	9 KT 52278	3 oz.	99¢	9 KT 52278	3 oz.	99¢	9 KT 52278
National Fine (SAE) threads														
$\frac{1}{4}$ -28	9 KT 5225	1 in.	3 oz.	99¢	9 KT 5221	2 oz.	49¢	9 KT 5228	3 oz.	99¢	9 KT 5228	3 oz.	99¢	9 KT 5228
$\frac{1}{8}$ -24	9 KT 52250	1 in.	3 oz.	99¢	9 KT 52210	2 oz.	59¢	9 KT 52280	3 oz.	99¢	9 KT 52280	3 oz.	99¢	9 KT 52280
$\frac{1}{8}$ -20	9 KT 52251	1 in.	3 oz.	99¢	9 KT 52211	2 oz.	69¢	9 KT 52281	3 oz.	99¢	9 KT 52281	3 oz.	99¢	9 KT 52281
$\frac{1}{8}$ -18	9 KT 52252	1 in.	3 oz.	99¢	9 KT 52212	2 oz.	79¢	9 KT 52282	3 oz.	99¢	9 KT 52282	3 oz.	99¢	9 KT 52282
$\frac{1}{8}$ -16	9 KT 52253	1 in.	3 oz.	99¢	9 KT 52213	2 oz.	89¢	9 KT 52283	3 oz.	99¢	9 KT 52283	3 oz.	99¢	9 KT 52283
$\frac{1}{8}$ -14	9 KT 52254	1 in.	3 oz.	99¢	9 KT 52214	2 oz.	1.29	9 KT 52284	3 oz.	99¢	9 KT 52284	3 oz.	99¢	9 KT 52284
$\frac{1}{8}$ -12	9 KT 52255	1 in.	4 oz.	1.99	9 KT 52215	2 oz.	1.39	9 KT 52285	3 oz.	99¢	9 KT 52285	3 oz.	99¢	9 KT 52285
$\frac{1}{8}$ -10	9 KT 52256	1 in.	4 oz.	1.99	9 KT 52216	2 oz.	1.39	9 KT 52286	3 oz.	99¢	9 KT 52286	3 oz.	99¢	9 KT 52286
$\frac{1}{8}$ -8	9 KT 52257	1 in.	4 oz.	1.99	9 KT 52217	2 oz.	2.09	9 KT 52287	3 oz.	99¢	9 KT 52287	3 oz.	99¢	9 KT 52287
$\frac{1}{8}$ -6	9 KT 52258	1 in.	4 oz.	1.99	9 KT 52218	2 oz.	2.09	9 KT 52288	3 oz.	99¢	9 KT 52288	3 oz.	99¢	9 KT 52288
Machine Screw Taps and Dies—all N.C. (10-32 is N.F.)														
4-40	9 KT 52232	1 in.	3 oz.	99¢	9 KT 5223	2 oz.	39¢	9 KT 5229	3 oz.	99¢	9 KT 5229	3 oz.	99¢	9 KT 5229
6-32	9 KT 52235	1 in.	3 oz.	99¢	9 KT 52194	2 oz.	39¢	9 KT 52200	3 oz.	99¢	9 KT 52200	3 oz.	99¢	9 KT 52200
8-32	9 KT 52237	1 in.	3 oz.	99¢	9 KT 52196	2 oz.	39¢	9 KT 52291	3 oz.	99¢	9 KT 52291	3 oz.	99¢	9 KT 52291
10-24	9 KT 52239	1 in.	3 oz.	99¢	9 KT 52198	2 oz.	49¢	9 KT 52292	3 oz.	99¢	9 KT 52292	3 oz.	99¢	9 KT 52292
12-24	9 KT 52241	1 in.	3 oz.	99¢	9 KT 52200	2 oz.	49¢	9 KT 52293	3 oz.	99¢	9 KT 52293	3 oz.	99¢	9 KT 52293
14-24	9 KT 52240	1 in.	3 oz.	99¢	9 KT 52201	2 oz.	49¢	9 KT 52294	3 oz.	99¢	9 KT 52294	3 oz.	99¢	9 KT 52294

9 KT 5230— $\frac{1}{4}$ -inch solid Pipe Die, NPT thread. Shipping weight 3 ounces. 99¢



CRAFTSMAN Tap and Die Accessories

1. Adj. Guide Die Stocks. For round dies. 9 KT 52180—For 1-in. dies, 14 oz., \$2.29. 9 KT 52181—For 1 $\frac{1}{2}$ -in. dies, 1 lb. 14 oz., 3.99. 9 KT 52185—For hex dies, 1 lb. 11 oz., 2.29.
2. Tap-and-Reamer Wrenches. Steel jaws. No. 4 Wrench, Takes 4-36 to 3 $\frac{1}{2}$ -in. taps. 9 KT 5214—Shpg. wt. 10 oz., \$2.29. No. 6 Wrench, Takes 3 $\frac{1}{2}$ to 3 $\frac{1}{2}$ -in. taps. 9 KT 52140—Shpg. wt. 1 lb. 10 oz., \$3.99.
3. Hand Reamer, Reams $\frac{1}{4}$ to $\frac{1}{2}$ -in. diam. 9 KT 5492—Shpg. wt. 5 oz., \$1.69.
4. Taper Reamer, Fits standard bit brace. Reams $\frac{1}{4}$ to $\frac{1}{2}$ -in. holes, 5 $\frac{1}{2}$ in. long. 9 KT 6728—Shpg. wt. 3 oz., \$1.89. Reams $\frac{1}{4}$ to $\frac{1}{2}$ -in. holes, 4 $\frac{1}{2}$ in. long. 9 KT 6729—Shpg. wt. 5 oz., 2.19.
5. CRAFTSMAN Poly Tap, 3. Kromedge tap sizes on blank 16-32, 8-32, 10-24, 14-24. 9 KT 5231—Shpg. wt. 5 oz., \$1.79.
6. New Die Holder, Fits 3 $\frac{1}{2}$ -in. socket drive. For 1-in. OD round dies. 9 KT 5237—Shpg. wt. 10 oz., \$1.29.
7. Taper-Reamer, Heat-treated steel. For reaming $\frac{1}{4}$ to $\frac{1}{2}$ -in. holes, 5 $\frac{1}{2}$ inches long. 9 KT 5479—Shpg. wt. 5 oz., \$1.79.
8. Adjustable Ratchet Tap Wrench, Hardened; centerless ground; fully polished. Self-equalizing jaws. Deep-seating teeth. Up to $\frac{1}{2}$ -in. capacity. 9 KT 4065—Shpg. wt. 12 oz., \$4.69.
9. Tap Wrenches, For $\frac{1}{4}$ to $\frac{1}{2}$ -in. taps and machine screw taps to size 14. 9 KT 4066—Shpg. wt. 9 oz., \$1.69. For $\frac{1}{4}$ to $\frac{1}{2}$ -in. taps. 9 KT 4067—Shpg. wt. 15 oz., 2.59.
10. Electrician's Tap and Drill Set, Six Kromedge machine taps (4-40, 6-32, 8-32, 10-32, 10-24, 14-24), plus exact high speed drills for each; polished flutes (sizes: 43, 36, 29, 25, 21, 7). "T" handle tap wrench. Plastic case. 9 KT 5208—Shpg. wt. 10 oz., Set \$5.49.

Portable Pow'r Pull

It's a hoist, a winch, a puller..
and it lifts up to 4000 pounds

\$24.99 One-ton capacity

Hoist engines . . . tighten cables and fencing
. . . pull stumps . . . move heavy machinery

Simple to operate. No ropes. $\frac{1}{4}$ -inch diameter aircraft-type cable break-strength tested to 4200 pounds. No clutch to slip. Automatic safety catch.

Aircraft-type swaged cable terminal lets clevis swivel. Drop-forged steel hooks; aircraft-quality aluminum alloy ratchet wheel. Cold rolled steel frame and lever. Steel parts cadmium plated. *Portable*—1-ton capacity model weighs only 6 $\frac{1}{2}$ lbs.; 2-ton model, only 8 lbs.

Catalog No.	Capacity	Max. lift	Leverage ratio	Wt.	Price
99 KT 7880C	1 ton	12 feet	15 to 1	7 lbs.	\$24.99
99 KT 7881C	2 tons	6 feet	30 to 1	9 lbs.	\$4.99

Wiregrip for above (not shown). Handles smooth or barbed wire . . . protects your hands.
9 KT 7882—Shipping weight 1 lb. 5 oz., \$3.49

Motor Sling only. For above. (Not shown.) Positive lock . . . lifts at any angle, no load shift.
9 KT 7884—Shipping weight 2 lbs. 2 oz., \$7.59



Differential Chain Hoist

Works 25% easier because it has
Torrington needle bearings in lower sheave

\$35.99 1-ton capacity

11 Works 25% easier than differential hoists with plain bearings! Load-tested to 150% of rated capacity. Non-slipping . . . locks automatically . . . holds load at any point. Aluminum alloy frame resists rust. Timken roller bearings in lower load hook for easier turning. Heat treated forged steel hooks. Zinc-plated steel chain resists rust. Meets Military Specifications MIL-H-904d (Ships) Class 2, Type A. Heavy-duty construction.

Catalog No.	Cap.	Max. lift	Chain	Wt.	Price
99 KT 7886K	$\frac{1}{2}$ ton	7 feet	36 ft.	28 lbs.	\$35.99
99 KT 7887L	1 ton	8 feet	30 ft.	50 lbs.	\$1.99

$\frac{1}{2}$ -ton Hoist with extra chain. †For each extra 4 ft. of chain, add \$4.65 to price. 2 $\frac{1}{2}$ lbs. to shpg. wt. of 99 KT 7886K above. Use Catalog Number F9 KT 7886SN for ordering.

1-ton Hoist with extra chain. †For each 4 ft., add \$5.19 to price. 3 $\frac{1}{2}$ lb. to shpg. wt. of 99 KT 7887L. Use Catalog Number F9 KT 7887SN for ordering. "F" items above shipped freight (rail or truck) or express from Winona, Minn. factory. †1 ft. additional lift requires 4 ft. of chain.

12 Double-truck Conveyor.* For loads to 2000 lbs. 8-ft. track, 12 4-wheel trolley, 7 single hangers with 6-in. threaded rod. F9 KT 7863N—Shipping weight 67 lbs., \$34.99.

8-ft. Track with Splice Hanger.* For use with F9 KT 7863N above. Punched 4-in. centers. Fits with 5-in. "I" beams. F9 KT 78651N—Shipping weight 42 lbs., \$14.99.

*Send freight (rail, truck) or express from Winona, Minn. factory.
90° Curved Track with Splice Hanger.** 4-ft. radius, 7 ft. long. F9 KT 78652—Shipping weight 37 lbs., \$25.49.

1-ton Trolley.** Fits F9 KT 78651N, F9 KT 78652 above or 5, 6, 8-in. "I" beam, 4 wheels, 3-in. flange. Steel plates. F9 KT 7864—Shipping weight 20 lbs., \$11.79.

Single hanger.** For F9 KT 78651N, F9 KT 78652 above, 6-in. rod. Place 16 in. apart on 2000-lb. loads; 20 in. on 1000 lb. F9 KT 78661—Shipping weight 1 pound, \$1.39.

Splice Hanger.** 6-inch threaded rod. F9 KT 78662—Shipping weight 2 pounds, 1.49. F9 KT 78664—Side Bracket,** Shipping wt. 2 lbs., .89¢. F9 KT 78663—Strap Bracket,** Shipping wt. 2 lbs., .79¢.

**From factory in Winona, Minn.


Gear-operated Hoist and Winch **\$23.99** lifts 1500 pounds

13 Turn handle . . . high-leverage, worm-driven gears lift up to $\frac{1}{2}$ ton. Release handle . . . hold load at any height. Top hook swivels 360°. Use as winch or puller. Forged steel hooks, 12-ft., $\frac{1}{4}$ -in. aircraft-type cable. Aluminum alloy housing. Compact: 11 $\frac{3}{4}$ x17 $\frac{1}{2}$ in. Lightweight: 8 lbs.
9 KT 7883—Shipping weight 8 lbs. 2 oz., \$23.99



No Money Down on anything Sears sells

SEE PAGE 90



You can dial the torque you want on

CRAFTSMAN

Micro-adjusting Torque Wrench

\$34.99



No dials to watch as you work. Excellent for use in the dark, in blind spots, on vibrating machinery, under water or in oil.

Reversible ratchet for close quarters. Simply adjust handle until calibrations show torque desired. As you turn out or bolt, wrench releases and signals when the pre-set torque is reached.

After you tighten one bolt, wrench resets automatically for next operation.

Top professional quality. Exceeds Federal Specifications GGG-W-686b, Type III, Class 2. Chrome-plated, 1/2-in. square drive. Measures 10 to 150 ft.-lbs. either direction.

Shipping wt. 3 lbs. 7 oz.

9 KT 4444.....\$34.99



1 CRAFTSMAN Torque Wrench

\$9.99 0 to 100 ft.-lbs.

1 Gives exact tightening tension. 1/2-in. square drive. Tempered steel; chrome-plated to resist rust. Use on engine cylinder heads, bearings, spark plugs. Measures foot-pounds in either direction. Comes with convenient chart for recommended tensions. Exceeds Federal Specifications GGG-W-686, Type I, Class I, Style A.

0 to 100-foot-pounds. For engine cylinder heads and plugs.
9 KT 44481—Wt. 2 lbs. 6 oz. \$9.99

0 to 150-foot-pounds. For tractors and trucks.
9 KT 44641—Wt. 2 lbs. 7 oz. \$12.49

0 to 50-foot-pounds and 0 to 600 inch-pounds on dual scale. For small engines (mowers, etc.). 3/4-inch square drive.
9 KT 44643—Wt. 1 lb. 13 oz. \$9.49

2 Point-setting Kits. Set points with professional accuracy in 1/2 the time.

Universal type (illustrated). For use on any distributor. One adjustment tool, including 4 feeler gauges (.016, .017, .020, .025), two adapters and 3 wire gap gauges (.030, .032, .035) and spark plug gap tool. Five micro-precision rings plus "dial-a-gap" tool for Delco closed-type distributor. Plastic box.

9 KT 40547—Shipping wt. 9 oz.Kit \$5.49

For Chrysler products only. (Not shown.) 3-blade adjustment tool, two micro-precision rings.

9 KT 40544—Shipping wt. 4 oz.Kit \$1.29

For General Motors and Ford products only. (Not shown.) Includes 3-blade adjustment tool and three micro-precision rings.

9 KT 40545—Shipping wt. 5 oz.Kit \$2.59

3 2-in-1 Distributor Tool. Speeds adjustment, replacement of Delco Remy distributor points.
9 KT 4085—Shipping weight 4 oz.\$1.39

4 Ignition Gauge. 14 leaf gauges .012 to .032 in. thick. 8 spark-plug-gap gauges .022 to .040 in. thick. Electrode straightener. In handy plastic case.
9 KT 4080—Shipping weight 5 oz.\$1.49

5 Spark-plug Gap Gauge. Provides 8 different wire gauges to measure spark-gap clearance. Electrode adjuster tool. In convenient plastic case.
9 KT 4075—Shipping weight 4 oz.49c

6 CRAFTSMAN Spark-plug Testing Screwdriver. Neon bulb lights in shock-proof handle. 1/2-in. vanadium steel bit, 9 inches long over all.
9 KT 4124—Shipping weight 6 oz.\$1.09

7 Spark-plug Wrench. Oval holes for turning with screwdriver or punch. Double end. Fits 13/16, 11/8 hex sizes. For 14 mm and 10 mm plugs. 3 1/2-in. long.
9 KT 45931—Shipping weight 5 oz.19c
Single end. Fits 13/16 hex size. For 14 mm plugs. 8 inches long.
9 KT 45935—Shipping weight 9 oz.39c

No Money Down on anything Sears sells

SEE PAGE 90



8 CRAFTSMAN Burnishing Hone. For 2 1/8 to 4 1/2-in. diameter cylinders. Use with 1/2-in. electric drill or drill press. 2 stones, 2 pads are included with hone.
9 KT 4679—Wt. 2 lbs. 2 oz. \$10.79
Pads, Stones. For above. Set of 4.
9 KT 4680—Wt. 6 oz.Set \$4.49

9 CRAFTSMAN Cylinder Grinder. For 2 1/8 to 4 1/2-in. diameter cylinders. For trucks, cars. 2 stones, 2 pads. 2 sets stone carriers, drive collar, shank, extension. For 1/2-in. drill, drill press.
9 KT 4681—Shpg. wt. 7 lbs. \$49.95
Coarse Stones. Set of 2 stones, pads.
9 KT 4684—Wt. 6 oz.Set \$4.29
Fine Stones. Set of 2 stones, pads.
9 KT 4685—Wt. 6 oz.Set \$4.29

10 Brake Cylinder Surfacing Hone. 1/4 to 1 1/2 in. For 1/2-in. drill. 2 sets stones, flexible shaft.
9 KT 4655—Shipping weight 4 ounces.\$6.99
Replacement Stones for above. 2 sets, 3 stones ea.
9 KT 4659—Wt. 1 oz.Pkg. of 2 sets \$3.49
Replacement Springs. Set screws, wrench.
9 KT 4660—Shipping weight 1 ounce.Pkg. 1.09

11 CRAFTSMAN Cylinder Surfacing Hone. 2 to 7-in. range. For cars, trucks. No oversizing. Use with 1/2, 3/4, 1-in. drill. With three stones.
9 KT 4638—Shipping weight 2 lbs. 2 oz.\$11.99
Replacement Stones, 280 grit. Package of 3.
9 KT 46381—Shipping weight 6 oz.Pkg. 3.79

12 Cylinder Wall Ridge Reamer. For casted blocks; short stroke motors, piston in place; 3 to 4 1/2-in. diameter channeled or straight cylinder.
9 KT 4712—Shipping weight 1 lb. 14 oz.\$11.99
13 Super Range Cylinder Ridge Reamer. Cutting range 2 1/8 to 4 1/4 inches.
9 KT 4721—Shipping weight 2 lbs. 6 oz.\$5.79

14 Valve Seat Refacer Set. Use abrasive discs below. For Ford, Merc., Ply., Dodge, many others with hardened insert valve seats.
9 KT 4639—Shipping weight 2 lbs. 4 oz. Set \$4.39
Abrasive Discs for above. 6 fine, 6 coarse grit.
9 KT 4640—Shipping weight 3 ounces. Pkg. \$1.09

15 Valve Refacing Tool. Formed washer for Chevrolet valves. Carbide cutter.
9 KT 47092—Shipping weight 1 lb. 12 oz. \$5.69

16 Valve Seat Reamers. For eng. with 45° cast-iron valve seats 1 to 2 in., including GM cars except Chevrolet.
9 KT 4637—Shipping weight 1 lb. 7 oz.\$2.39
Set for Chevrolet. 1953-67 except on Hi-Performance 348, 396, 409 and 427 cu. in. engines.
9 KT 46492—Shipping weight 2 lbs. 2 oz.\$4.79

17 Valve Grinder. Interchangeable cups for use on valves on all gas engines.
9 KT 47041—Shipping weight 2 lbs. 2 oz.\$3.19

18 CRAFTSMAN 15-pc. Bushing Driver Set. 13 bushing collars (3/8 to 1 1/2 in. inside; 1/2 to 1 1/4 in., outside diameter); 2 driving handles. Install, remove bushings. Metal case.
Shpg. wt. 4 lbs. 2 oz.
9 KT 4707.....Set \$9.19

19 CRAFTSMAN Clutch Aligning Tool. 7 dual pilots plus tool give 8 diameters: .390, .612, .624, .668, .749, .780, .808 and .984 inch. 9 inches long.
Shpg. wt. 2 lbs. 6 oz.
9 KT 4728.....Set \$4.49



20 CRAFTSMAN 8-piece Gasket Punch Set. Cuts holes in gaskets, rubber hose. Not for metal. 7 punches: 1/4, 3/16, 1/8, 5/16, 3/8, 7/16 and 1/2-in. Handle fits all punches. Meets Federal Specifications GGG-P-831a.
9 KT 3635—Wt. 1 lb. 8 oz. Set \$5.99

21 CRAFTSMAN Ratchet-type Piston-ring Compressor. For cars, small trucks. Takes 4 rings at one time. 2 1/4 to 5-inch diameter. 3 1/2 in. deep for late-model cars. Self-locking. Spring-steel band. Key wrench.
9 KT 4716—Wt. 14 oz.\$2.39

22 Piston Ring Expander. Re-44 move or install rings 2 1/4 to 4 1/4-in. diameter. Expander jaws grasp sides of ring, hooks engage points. Ring expands front, back and sidewise.
Shipping weight 12 oz.
9 KT 4661.....\$2.09

23 Piston Groove Cutter and Cleaner. For pistons up to 5 inches. Change depth of cut by turning knurled screw. Five points for grooving; one for trimming lands... all in one blade.
Shipping wt. 1 lb. 2 oz.
9 KT 4720.....\$4.69

24 Overhead Valve Lifter. For valve-in-head motors. Off-set pivot pin. 14 in. long.
9 KT 4558—Wt. 1 lb. 2 oz. \$2.19

25 Magnetic Key Insert. Per-40 magnet magnets. Keys held by jaws of non-magnetic spring levers. stainless steel. Replaceable split-valve keys.
9 KT 4671—Wt. 6 oz.\$1.99

26 Tappet Adjusting Tool. 12-point wrench engages tappet lock nut. Screwdriver of swivel arm engages adjusting screw. For Buick, Chevrolet, Ford-V-8, Lincoln, Mercury. 9/16, 5/8-inch openings.
9 KT 4557—Wt. 12 oz.\$1.89

27 "Little Shorty" Screw-type Valve Lifter. HI-off-set type for under tender use. For late-model L-head engine (with manifold on). Jaws of spring steel. Sturdy iron handle lets you get a good grip. Upper jaws can be adjusted. 8 1/2 inches long. Parallel lift 2 1/4 inches. Shipping weight 1 lb. 5 oz.
9 KT 4559.....\$2.99

28 Valve Lifter. 10 inches long. Convenient self-locking catch. Can be used for most engines.
Shipping weight 14 ounces.
9 KT 4650.....\$1.19

29 CRAFTSMAN Valve-49 spring Compressor. Vertical lift type. 9x11-in. frame 10 1/2-in. capacity. No. 1 straight spring steel jaws. Automatic lock... holds any position. Ratchet crank.
Shpg. wt. 6 lbs. 7 oz.
9 KT 4693.....\$6.49

30 Replacement Jaws for above. No. 5 Offset Jaws. For Plymouth, Dodge, Chrysler, Valiant. Wt. 4 oz.
9 KT 4699.....Pair \$1.39

31 No. 2 Offset Jaws. For GM and Continental engines. Shpg. wt. 4 oz.
9 KT 4697.....Pair 99c



CRAFTSMAN Brake and Muffler Tools

- 1 Muffler Cut-off Tool. Four knife-edged cutting wheels cut quick, clean track. Can be operated by one hand—tightens by turning handle. No clamps or other locking devices. Less than 1/2 turn cuts around pipe. For 1 1/2 to 2 1/2-in. O.D. pipe. 9 KT 47811—Wt. 1 lb. 10 oz. \$9.89
- 2 Muffler Removal Tool. Special blade breaks bond. Chrome-plated alloy steel. 6 1/2 in. long. 9 KT 47752—Wt. 14 oz. \$3.69
- 3 Hose Clamp Pliers. Special slots for removal of spring clamps. Forged alloy steel; chrome-plated. 8 inches long. 9 KT 47732—Wt. 15 oz. \$2.19
- 4 Brake Spring Pliers. Forged alloy steel; chrome-plated. Socket on handle. Easier to operate. 13 1/2 in. long. 9 KT 47395—Wt. 1 lb. 3 oz. \$2.99
- 5 Chevrolet Brake Adjusting Tool. For Bendix-type car brakes. Bit: 1 1/2 in. wide, 5/8-inch stock. 8 inches long. Chrome-plated. 9 KT 4736—Shpg. wt. 6 oz. .69c
- 6 Brake Adjusting Tool. Adjusts star reel through drum slot. Drop-forged alloy steel; chrome-plated. 5 1/2 in. wide. 15-in. blade. 9 3/4 inches long. 9 KT 4740—Shpg. wt. 8 oz. .99c
- 7 Lock-ring Pliers. Spread lock rings on brakes, transmissions, etc. 8 1/2 in. open to 1 1/4 in. 9 KT 4735—Shpg. wt. 10 oz. \$2.39



Tools for wheels, valves and batteries

- 18 CRAFTSMAN Cross-in Wrench. 16-in. arm; 5/8-in. diameter. 1/2-in. 15/16-in. and two 1/4-in. openings. 9 KT 4472—Shpg. wt. 3 lbs. \$2.59
- As above. 22-in. arm; 5/8-in. diameter. 1/2-in., 15/16-in., 1/2-in. and 15/16-in. openings. 9 KT 44895—Wt. 4 lbs. 10 oz. \$3.69
- 19 Tire Valve Tool. Removes core. Re-threads both inside and outside of valve stem. 9 KT 4705—Shpg. wt. 3 oz. .25c
- 20 CRAFTSMAN 3-arm Universal Wheel Hub Puller. Fits any hub with bolt circle up to 7 1/2 in. Meets Federal Specifications GGG-P-781A. See hub puller striking wrench 9 KT 46631 below. 9 KT 46641—Wt. 8 lbs. 2 oz. \$12.99
- 21 Hub Puller Striking Wrench. To be used with 9 KT 46641 listed above. 9 KT 46631—Wt. 1 lb. 15 oz. \$2.39
- 22 CRAFTSMAN Gear Pullers. Pull 64 gears, wheels. Drop-forged, high alloy steel jaws.
- | Catalog Number | Jaw spread, inches | Reach, in. | Shipping weight, lbs. oz. | Price each |
|-----------------------|--------------------|------------|---------------------------|------------|
| 9 KT 46941 0 to 3 | 7 1/2 | 12 | 12 | \$4.29 |
| 9 KT 46901 0 to 5 1/2 | 3 1/2 | 12 | 12 | 5.29 |
| 9 KT 46911 0 to 8 | 8 1/2 | 3 | 2 | 9.49 |
- 23 Tie Rod Spreader. Spreads and adjusts tie-rod sleeves in seconds without removing tool. Works quickly. . . won't bind. Reversible sliding handle. . . use from either side. Two heads: large for regular cars, small for compacts. 3x1 1/4-in. forged steel head. Cadmium plated. 9 3/4 in. long. 7/8-in. diam. handle. 9 KT 4652—Wt. 1 lb. 1 oz. \$4.99
- 24 Slide Hammer Puller. Use as 2 or 3 arm. Capacity range —2 arm: outside 1 1/2—4 1/2 in.; inside 1 1/2—3 1/2 in.; 3 arm: outside 1 1/2—4 1/2 in.; inside 1 1/2—4 1/2 in. Removes gears, etc. 9 KT 4693—Wt. 7 lbs. 6 oz. \$12.49
- 25 Valve Fishing Tool. Threaded cap. Professional quality. 9 KT 4738—Wt. 4 oz. .29c
- 26 CRAFTSMAN Terminal Clamp Lifter. Removes badly curved clamps. . . even new spring type. Grips below or on sides of clamps. Forged alloy steel jaws. . . chrome-nickel plated. 9 KT 47146—Wt. 1 lb. 2 oz. \$4.19
- 27 Battery Terminal Lifter. Fits all car and truck batteries. Forged steel body. 9 KT 47145—Wt. 1 1/2 oz. \$2.19



Save money . . . do your own body and fender work with CRAFTSMAN professional-quality tools

10-piece Set \$37.99

- 10-pc. Set, 1 each of (8) thru (17). Separately total \$42.00. Save \$4.61. 99 KT 45681K—Wt. 20 lbs. Set \$37.99
- 8 Bumping hammer, 1 1/2-in. square, 1 1/2-in. round faces. 5-in. head. 9 KT 4551—Wt. 1 lb. 7 oz. \$3.49
- 9 Light Bumping Hammer. 3/4-in. sq., 1 1/2-in. round faces. 3 1/2-in. head. 9 KT 4530—Shpg. wt. 14 oz. \$3.09
- 10 Blunt Pick Hammer. 1 1/2-in. face. 3-in. long point. 3 1/2-in. head. 9 KT 4553—Shpg. wt. 1 lb. \$3.49
- 11 Pick and Finishing Hammer. 1 1/2-in. face. 2 1/2-in. pick. 5 1/2-in. head. 9 KT 4554—Shpg. wt. 1 lb. \$3.49
- 12 Cross Pein Hammer. 3 1/2-in. cross pein. 1 1/2-in. face. 5-in. head. 9 KT 4552—Wt. 1 lb. 2 oz. \$3.49
- 13 Heel Dolly. Use for shrinking work. 9 KT 4562—Wt. 2 lbs. 13 oz. \$3.49
- 14 Universal Dolly. 2 beading surfaces. A basic tool of many uses. 9 KT 4561—Shpg. wt. 3 lbs. 7 oz. \$4.69
- 15 All-purpose Dolly. Right molding, bead-working surfaces. 3-in. high. 9 KT 4565—Shpg. wt. 3 lbs. 12 oz. \$4.69
- 16 Combination Dolly and Spoon. Use for roof-rail work. 9 KT 4563—Shpg. wt. 3 lbs. 8 oz. \$4.49
- 17 Mechanic's Tool Box. 20x8 1/2 x 9 1/2 in. 22-gauge steel with gray baked enamel finish. Plastisol-coated steel handle. Three-section lift-out tote tray. Two one-piece drawbolts, hasp, padlock eye. 99 KT 6512C—Shipping wt. 13 lbs. \$8.19

Body Tools . . . Supplies

- 28 CRAFTSMAN Metal Mend. Plastic compound for use as auto body filler. Dries hard. No heat required. 9 KT 45741—8 oz. Wt. 13 oz. . . . Can .69c
- 9 KT 45742—32 oz. Wt. 2 lbs. 7 oz. Can \$1.59
- 29 CRAFTSMAN KROMEDGE 14-in. Car Body File. Fits holder below. 9 KT 3114—Shpg. wt. 14 oz. \$3.69
- 30 CRAFTSMAN Adjustable File Holder. For concave, convex or straight filing. Aluminum. (No file.) 9 KT 3113—Wt. 1 lb. 15 oz. \$5.49



- 31 Dent Puller. 17 in. long. Pyraline handle grip and contour slide hammer grip. Screw into surface, pull out dent, fill opening with Metal Mend (9 KT 45741). 9 KT 4570—Shpg. wt. 3 lbs. 3 oz. \$4.49

CRAFTSMAN Reamer and Pilot Set

\$79.99

- 90 Adjustable. Precision made. 9 0/4 reamers and 9 pilots. Sizes 1 1/2 to 1 1/2 inches. Metal box. 9 KT 4676—Wt. 14 lbs. . . . Set \$79.99
- 90 Adjustable Reamer. Not for gun barrels, etc. Sizes below in inches.
- 9 KT 46411—1/2 to 1/2 in. Wt. 3 oz. \$5.99
- 9 KT 46412—3/8 to 3/8 in. Wt. 3 oz. 5.99
- 9 KT 46413—1/2 to 1/2 in. Wt. 3 oz. 5.99
- 9 KT 46414—1/2 to 1/2 in. Wt. 3 oz. 5.99
- 9 KT 46415—1/2 to 1/2 in. Wt. 3 oz. 5.99
- 9 KT 46416—1/2 to 1/2 in. Wt. 3 oz. 6.79
- 9 KT 46417—1/2 to 1/2 in. Wt. 4 oz. 6.79
- 9 KT 46418—1/2 to 1/2 in. Wt. 4 oz. 4.99
- 9 KT 46419—1/2 to 1/2 in. Wt. 5 oz. 5.19
- 9 KT 46421—1/2 to 1/2 in. Wt. 6 oz. 5.19
- 9 KT 46422—1/2 to 1/2 in. Wt. 8 oz. 5.49
- 9 KT 46423—1/2 to 1/2 in. Wt. 10 oz. 5.99
- 9 KT 46424—1/2 to 1/2 in. Wt. 12 oz. 6.19
- 9 KT 46425—1/2 to 1/2 in. Wt. 15 oz. 6.49
- 9 KT 46426—1/2 to 1/2 in. Wt. 1 lb. 3 oz. 6.99
- 9 KT 46427—1/2 to 1/2 in. Wt. 1 lb. 3 oz. 8.49



Individual Reamer Pilots

- 34 Adjustable. Precision made. Ground diametrically. Sizes in inches.
- 9 KT 46431—1/2 to 1/2 in. Wt. 5 oz. \$2.69
- 9 KT 46432—1/2 to 1/2 in. Wt. 6 oz. 2.89
- 9 KT 46433—1/2 to 1/2 in. Wt. 7 oz. 2.99
- 9 KT 46434—1/2 to 1/2 in. Wt. 8 oz. 3.19
- 9 KT 46435—1/2 to 1/2 in. Wt. 10 oz. 3.39
- 9 KT 46436—1/2 to 1/2 in. Wt. 11 oz. 3.59
- 9 KT 46437—1/2 to 1/2 in. Wt. 13 oz. 3.79
- 9 KT 46438—1/2 to 1/2 in. Wt. 15 oz. 3.99
- 9 KT 46439—1/2 to 1/2 in. Wt. 1 lb. 1 oz. 4.19

- 95 Grease Ram. Hydraulic pressure forces hardened substances from Zerk, Alemite grease fittings. Precision made. 5 1/2 inches. 9 KT 4653—Shipping weight 8 ounces. \$3.99
- 96 Oil Filter Wrench. Easily removes tightest spin-on filters. The harder you turn, the tighter it grips. Works in hard-to-reach areas. Use with any 3/4-inch wrench. Self-ratcheting. 9 KT 47810—Shipping weight 14 ounces. \$2.89
- 97 Oil Filter Wrench. Fits spin-type. Heat-treated steel spring. 9 KT 5572—Wt. 8 oz. \$1.29
- (38 thru 40) CRAFTSMAN Trigger Oilers. 1-piece dunces. . . plunger handles. Nickel-plated for longer life. Leakproof. Easily detachable handles.
- | Catalog No. | Size | Spout | Shpg. wt. | Each |
|----------------|-------|-----------|-----------|--------|
| (38) 9 KT 5583 | 1 pt. | 6 in. | 12 ounces | \$2.69 |
| (39) 9 KT 5581 | 6 oz. | 6 in. | 10 ounces | 1.69 |
| (40) 9 KT 5580 | 4 oz. | 4 1/2 in. | 7 ounces | 1.39 |


- 41 Non-corrosive Oil. Light-duty for general household use. In 1-qt. can. 9 KT 55941—Wt. 2 lbs. 7 oz. . . . Can .89c
- 42 CRAFTSMAN Pump Oilier. Nickel-plated. Force-fed. 1-piece dome, seamless bottom. 7-inch spout is detachable. Capacity 3/4 pint. 9 KT 5582—Shpg. wt. 14 oz. \$1.89
- 43 Flexible Steel Spouts. Interchangeable. For oilers (37), (38) and (39) at left and (42) above. 9 KT 5584—6 1/2 in. Wt. 2 oz. . . . 59c
- 9 KT 5585—13 in. Wt. 3 oz. . . . 79c
- 44 Household Oilier for light duty work. 1-ounce capacity. 4 1/2-inch spout with bent tip. 9 KT 5575—Shpg. wt. 3 oz. . . . 25c
- 45 Household Oilier. Full. 10-ounce capacity. 4-inch spout. 9 KT 5576—Shpg. wt. 8 oz. . . . 49c



CRAFTSMAN
REG. U.S. PAT. OFF.

Alloy-steel Wrenches

Special "Super-Tuff" molybdenum alloy, drop forged under as much as 2½ tons pressure to produce an extra-dense steel of enormous strength. Heat treated in modern, controlled furnaces. Chrome plated; extra-high-polish on heads, panels.

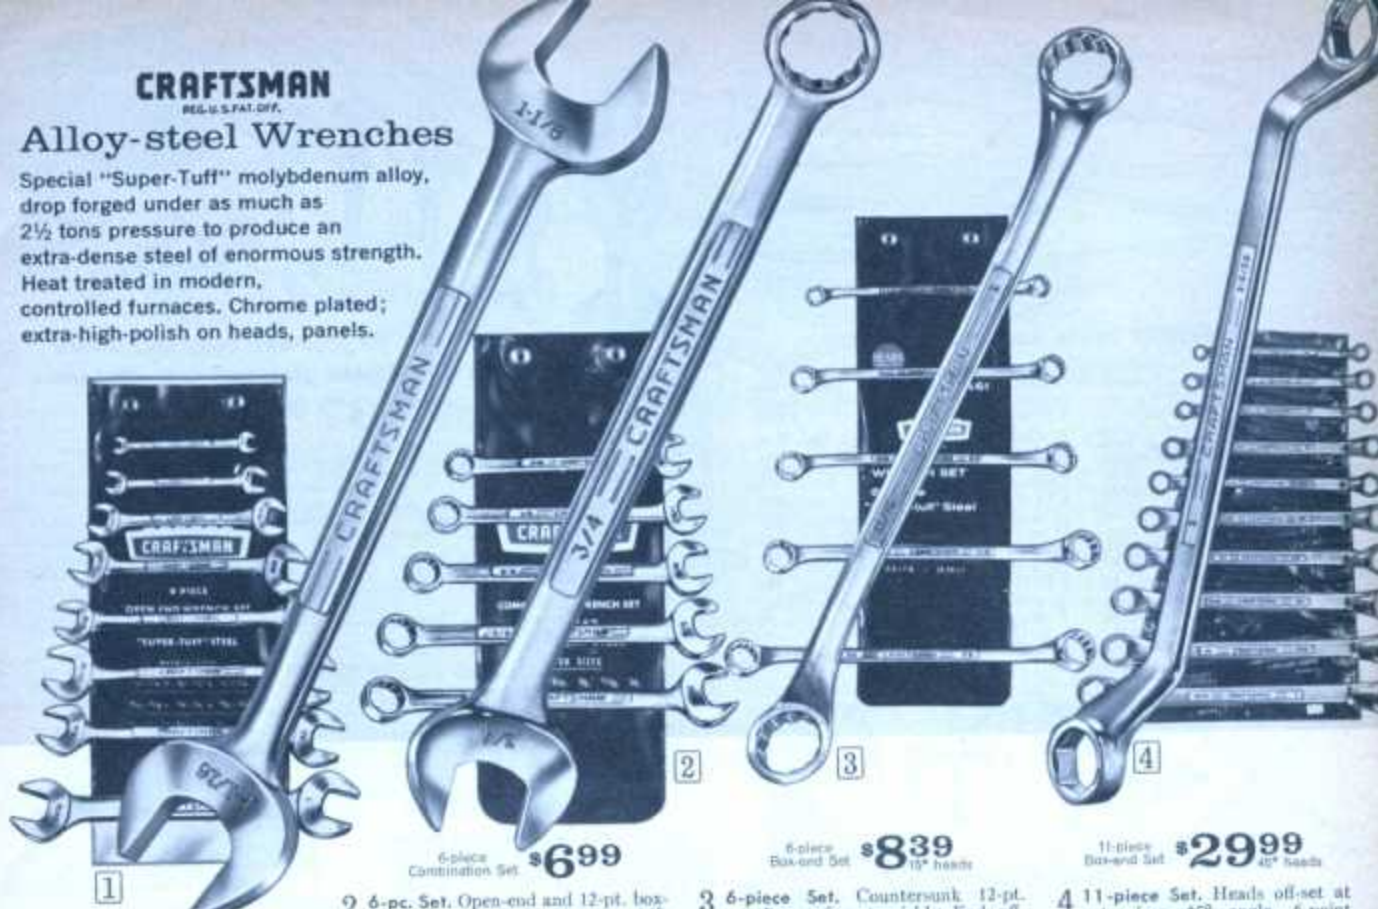

1 5-piece Open-end Set \$529

1 5-piece Set, 5 sizes below, from ½ x ⅞ in. to 1½ x 2 in. Exceeds Fed. Specs. GGG-W-636d, Type IV. Plastic pouch.

9 KT 4453—Wt. 1 lb. 11 oz. Set \$5.29

6-piece Set, Opening sizes: ½ x ⅞, ⅞ x 1, 1 x 1¼, 1¼ x 1½, 1½ x 1¾, 1¾ x 2 in. Plastic pouch.

9 KT 4455—Wt. 2 lbs. 7 oz. Set \$6.99

9-piece Set, 9 sizes below, from ½ x ⅞ in. to 1½ x 2 in. Pouch.

9 KT 4456—Wt. 4 lbs. 1 oz. Set \$11.19

Individual Open-end Wrenches

Catalog Number	Opening size, in.	Shpg. wt. lbs. oz.	Each
9 KT 44571	½ x ⅞	3	79c
9 KT 44572	⅞ x 1	3	89c
9 KT 44580	1 x 1¼	3	99c
9 KT 44581	1¼ x 1½	8	\$1.09
9 KT 44582	1½ x 1¾	8	1.19
9 KT 44583	1¾ x 2	10	1.29
9 KT 44584	2 x 2½	10	1.39
9 KT 44585	2½ x 3	14	1.79
9 KT 44586	3 x 3½	1	2.29
9 KT 44587	3½ x 4	2	4.19
9 KT 44588	4 x 4½	2	5.59
9 KT 44589	4½ x 5	2	6.49

2 6-piece Combination Set \$699

2 6-pc. Set, Open-end and 12-pt. box-end openings. Ends offset at 15°. ½ in. ⅞, ⅞ x 1, 1 x 1¼, 1¼ x 1½, 1½ x 1¾, 1¾ x 2 in. 3¼ to 9¼ in. long. Exceeds Fed. Specs. GGG-W-636d, Type III. Plastic pouch.

9 KT 4462—Wt. 1 lb. 12 oz. Set \$6.99

10-piece Set, ½, ⅞, 1, 1¼, 1½, 1¾, 2, 2½, 3, 3½ in. Plastic pouch.

9 KT 4468—Wt. 4 lbs. 1 oz. Set \$13.89

14-piece Set, ½, ⅞, 1, 1¼, 1½, 1¾, 2, 2½, 3, 3½, 4, 4½, 5, 5½ in. In fitted plastic tool roll.

9 KT 4464—Wt. 9 lbs. Set \$26.49

Individual Combination Wrenches

Catalog No.	Opening size, in.	Length, in.	Shpg. wt. lbs. oz.	Each
9 KT 44690	½	3½	3 oz.	89c
9 KT 44691	⅞	4	3 oz.	89c
9 KT 44692	1	4½	3 oz.	99c
9 KT 44693	1¼	4½	3 oz.	99c
9 KT 44694	1½	5½	4 oz.	\$1.09
9 KT 44695	1¾	6	4 oz.	1.09
9 KT 44696	2	6½	5 oz.	1.19
9 KT 44697	2½	7½	5 oz.	1.29
9 KT 44698	3	8½	6 oz.	1.39
9 KT 44701	3½	9½	9 oz.	1.49
9 KT 44702	4	10½	10 oz.	1.69
9 KT 44703	4½	11½	11 oz.	1.89
9 KT 44704	5	12½	14 oz.	1.99
9 KT 44705	5½	13½	16 oz.	2.49
9 KT 44706	6	14½	18 oz.	3.39
9 KT 44707	6½	15½	20 oz.	3.79
9 KT 44708	7	16½	22 oz.	4.79
9 KT 44709	7½	17½	24 oz.	5.29

3 6-piece Box-end Set \$839

3 6-piece Set, Countersunk 12-pt. openings. Fit nut quickly. Ends offset at 15° angle. Plastic pouch. ½ x ⅞, ⅞ x 1, 1 x 1¼, 1¼ x 1½, 1½ x 1¾, 1¾ x 2 in. 7¼ to 14½ in. long. Exceeds Fed. Specs. GGG-W-636d, Type I.

Shipping weight 2 lbs. 4 oz.

9 KT 4461—Set \$8.39

11-piece Set, Opening sizes: ½ x ⅞, ⅞ x 1, 1 x 1¼, 1¼ x 1½, 1½ x 1¾, 1¾ x 2, 2 x 2½, 2½ x 3, 3 x 3½, 3½ x 4, 4 x 4½ in. 7¼ to 17 inches long. Complete with plastic pouch.

Shipping weight 5 pounds 2 ounces.

9 KT 4340—Set \$18.79

Individual Box-end Wrenches

Catalog Number	Opening size, in.	Length, in.	Shpg. wt. lbs. oz.	Each
9 KT 43919	½	5½	3	89c
9 KT 43920	⅞	7½	4	99c
9 KT 43921	1	8½	4	\$1.09
9 KT 43923	1¼	9½	5	1.19
9 KT 43924	1½	10½	6	1.29
9 KT 43925	1¾	11½	7	1.39
9 KT 43926	2	12½	7	1.49
9 KT 43927	2½	13½	8	1.59
9 KT 43928	3	14½	12	1.79
9 KT 43929	3½	15½	12	1.99
9 KT 43934	4	16½	13	3.19
9 KT 43935	4½	17½	14	4.39
9 KT 43936	5	18½	19	6.19
9 KT 43937	5½	19½	22½	7.29

4 11-piece Box-end Set \$2999

4 11-piece Set, Heads off-set at extra-deep 45° angle, 6-point openings. Sizes: ½ x ⅞, ⅞ x 1, 1 x 1¼, 1¼ x 1½, 1½ x 1¾, 1¾ x 2, 2 x 2½, 2½ x 3, 3 x 3½, 3½ x 4, 4 x 4½ in. From 7¼ to 15 inches long. Meets Federal Specifications GGG-W-636d, Type I. Packed in fitted, heavy-plastic tool roll.

Shipping weight 9 lbs. 5 oz.

9 KT 43725—Set \$29.99

Individual deep offset Box-end Wrenches

Catalog Number	Opening size, in.	Length, in.	Shpg. wt. lbs. oz.	Each
9KT43710	½	7½	4	\$1.69
9KT43714	⅞	8½	4	1.99
9KT43711	1	9½	5	2.19
9KT43715	1¼	9½	6	2.39
9KT43712	1½	10½	7	2.59
9KT43716	1¾	10½	13	2.79
9KT43713	2	11½	11	2.99
9KT43717	2½	12½	1	3.29
9KT43718	3	13½	4	3.99
9KT43719	3½	14½	8	4.49
9KT43720	4	15½	13	4.99

UNCONDITIONAL GUARANTEE:

If any CRAFTSMAN Wrench on this page fails to give complete satisfaction, return it, and it will be replaced free of charge. This does not apply to tools used in rental service.



CRAFTSMAN 3-pc. Short Box-end Set

5 Off-set heads; short length for work on manifolds, starters, etc. 12-pt. openings. Drop-forged "Super-Tuff" molybdenum alloy steel. Chrome-plated. 3-piece set of sizes listed below. Exceed Federal Specifications GGG-W-636d. Plastic pouch.

9 KT 4365—Shipping weight 8 ounces. Set \$3.09

Catalog No.	Size (in.)	Length (in.)	Shpg. wt. lbs. oz.	Each
9 KT 43660	½ x ⅞	4½	3 ounces	99c
9 KT 43661	⅞ x 1	5½	4 ounces	\$1.09
9 KT 43662	1 x 1¼	6	5 ounces	1.19

Economy-priced carbon-steel Wrenches

Drop-forged high-carbon steel. Heat treated and hardened for long service. Chrome plated to resist rust. Polished heads.

6 6-piece Open-end Set. Heads set at standard 15° angle. ½ to 3½-inch openings. 3¼ to 8½ inches long. Shipping weight 1 lb. 7 oz.

9 KT 4364—Set \$3.29

7 5-piece Box-end Set. 45° offset heads to clear obstructions. ½ to 3½-inch 12-point openings. 6¼ to 12 inches long. Wt. 2 lbs. 2 oz.

9 KT 4380—Set \$3.49

8 6-piece Combination Set. Same size openings both ends. ½ to 1½-in. openings. 4½ to 8 inches long. Wt. 1 lb. 2 oz.

9 KT 4385—Set \$3.29

Oversize knurl speeds
opening and closing . .

CRAFTSMAN Adjustable-end Wrench

Jaw does not protrude at top
in closed position . .
prevents jamming

\$1.89
4-inch

Wrench is 25% stronger than Federal Specifications (GGG-W-631b Type 1) require. Chrome-plated, forged alloy steel. Hex shape at any jaw position. The stainless steel knurl spring wears indefinitely—this is what holds the movable jaw firmly in position. Milled jaws give a firm grip.

Catalog Number	Size	Capacity	Shipping weight	Each
9 KT 44650	4 inches	1/2 in.	3 oz.	\$1.89
9 KT 44651	6 inches	3/4 in.	5 oz.	1.99
9 KT 44652	8 inches	1 in.	10 oz.	2.49
9 KT 44653	10 inches	1 1/8 in.	1 lb.	2.79
9 KT 44654	12 inches	1 3/8 in.	1 lb. 8 oz.	3.99
9 KT 44656	16 inches	2 1/8 in.	3 lbs. 15 oz.	7.49



1 CRAFTSMAN 8-in-1 Wrench.
Eight 12-pt. openings: 1/16, 1/8, 1/4, 3/16, 1/2, 5/8, 3/4, 1 in. (small head); 1/2, 3/4, 1, 1 1/4, 1 1/2, 2 in. (large head). 2 swivel heads. Ease of adjustable wrench . . grip of box-end wrench . . range of socket wrench. 9 in. long.
9 KT 4407—Wt. 1 lb. 2 oz. . . . \$3.99

2 CRAFTSMAN Combination Open-end and Socket Wrenches. 12-point swivel socket for hard-to-get-at places. Chrome-plated for rust-resistance. Drop-forged.
6-pc. Set. Sizes below except 1 1/2 in. 9 KT 4255—Wt. 2 lbs. 4 oz. Set \$13.99

Catalog Number	Size (in.)	Length (in.)	Shpg. wt. (lb. oz.)	Each	
9 KT 42540	1/8	7 1/4	4	\$1.99	
9 KT 42541	1/4	7 1/4	5	2.19	
9 KT 42542	3/8	8 1/4	8	2.49	
9 KT 42543	1/2	8 1/4	8	2.69	
9 KT 42545	3/4	9 1/4	9	2.99	
9 KT 42547	1 1/4	9 1/4	10	3.49	
9 KT 42546	1 1/2	10 1/4	11	3.29	
9 KT 42548	1 3/4	10 1/4	1	4	3.99

3 Adjustable-end Wrenches. Drop-forged alloy steel. Milled jaws. Face and outside edge of handle are polished. Made in Japan. Chrome-plated to resist rust.

Catalog Number	Length (in.)	Opens (in.)	Shpg. wt. (lb. oz.)	Each
9 KT 30870	6	3/4	7	\$1.19
9 KT 30871	8	1	10	1.59
9 KT 30872	10	1 1/4	1	1.99
9 KT 30873	12	1 1/2	1	2.79



Ignition Wrench Sets for auto shop or home . . Midget Wrench Sets

4 CRAFTSMAN 8-pc. Open-end Midget Ignition Wrench Set. 15° and 80° angle heads; same opening both ends.
Includes sizes 1/16, 1/8, 1/4, 3/8, 1/2, 5/8, 3/4, 1, 1 1/4, 1 1/2, 2 in. Lengths 2 1/2 to 3 3/4 inches. Heat treated. Chrome-plated. Complete with plastic pouch. Shpg. wt. 6 oz.
9 KT 4306 Set \$4.89

5 CRAFTSMAN 10-piece Combination Midget Wrench Set. Heat-treated, chrome-plated. One 12-point box-end, one offset open-end. 1/16 to 1/2 in. Lengths 2 1/4 to 3 3/4 in. Plastic pouch.
9 KT 4344—Shpg. wt. 6 oz. . . . Set \$5.79

6 CRAFTSMAN 4-piece Midget Box-end Wrench Set. Heat-treated, chrome-plated, 6-point openings. Set includes sizes 1/16, 1/8, 1/4, 1/2 in. Lengths 2 1/4 to 3 3/4 in. long. Plastic pouch.
9 KT 4379—Shipping weight 4 oz. Set \$2.89

7 14-piece Ignition Set. Nickel-plated steel is rust resistant. 8 combination box and open-end midget wrenches (1/16 to 1/2 in. openings); 4 1/2 in. ignition plier; midget screwdriver; 6-leaf thickness gage; ignition file; center punch; pin punch. Plastic pouch. Not CRAFTSMAN.
9 KT 44671—Shipping wt. 10 oz. . . Set \$3.69

CRAFTSMAN Ignition File. (Not shown.) Save . . file points yourself. Double cut; 5 in. long. Kromedge file stays sharp.
9 KT 3119—Shipping weight 3 oz. . . . 25c



CRAFTSMAN Special Wrenches . . all professional quality that means long wear

8 General-duty Adjustable Wrench. Forged alloy steel. Exceeds Federal Specifications GGG-W-631b. Enamel finish.
9 in. Opens 2 1/2 inches.
9 KT 44490—Shpg. wt. 13 oz. . . \$1.59
11 in. Opens 2 1/2 inches.
9 KT 44491—Wt. 1 lb. 11 oz. . . 2.19

9 3-piece Flare-nut Wrench Set. One each of sizes below. 6 pt.
9 KT 4432—Shpg. wt. 13 oz. Set \$5.29

Individual Wrenches.
5/8 x 1 1/8 in. 6 in. long.
9 KT 44170—Shipping wt. 3 oz. . . 1.89
1 1/2 x 1 1/8 in. 6 1/2 in. long.
9 KT 44171—Shipping wt. 4 oz. . . 1.99
1 1/2 x 1 1/8 in. 8 1/2 in. long.
9 KT 44172—Shipping wt. 8 oz. . . 2.09

10 4-piece Tappet Wrench Set. Drop-forged steel . . chrome plated. One each of sizes below except 1 1/4 x 1 1/8 in. Plastic pouch. Exceeds Fed. Specs. GGG-W-636d.
Shipping weight 1 lb. 4 oz.
9 KT 44452 Set \$4.89

Individual Wrenches
5/8 x 1 1/8 in.
9 KT 44470—Shipping wt. 5 oz. . . 1.19
1 1/2 x 1 1/8 in.
9 KT 44471—Shipping wt. 5 oz. . . 1.19
1 1/2 x 1 1/8 in.
9 KT 44472—Shipping wt. 5 oz. . . 1.29
1 1/2 x 1 1/8 in.
9 KT 44473—Shipping wt. 6 oz. . . 1.39
1 1/2 x 1 1/8 in.
9 KT 44474—Shipping wt. 8 oz. . . 1.49

11 Starter and Manifold Wrench. Drop-forged. Chrome-plated. 12-pt. openings. 3/16 x 1/2 in. 7 1/4 in. long.
9 KT 4376—Shpg. wt. 6 oz. . . . \$1.99

12 Wrench Set. One each of sizes below. Ratcheting open end turns down nut without removing wrench from work. Other end is 12-point box-end of same size. Plastic pouch.
9 KT 4490—Shpg. wt. 1 lb. . . . Set \$7.49

Cat. No.	Opening	Length	Wt.	Each
9 KT 43430	3/16 in.	4 1/2 in.	3 oz.	\$1.29
9 KT 43431	1/8 in.	5 1/2 in.	4 oz.	1.49
9 KT 43432	1/4 in.	6 in.	5 oz.	1.69
9 KT 43434	3/8 in.	6 1/2 in.	5 oz.	1.79
9 KT 43435	1/2 in.	7 1/2 in.	6 oz.	1.99

13 5-pc. Ratcheting Box-end Wrench Set. One each of sizes below. For work in close, hard-to-get-at places. Alloy steel. Accurately broached 12-point openings. These wrenches are chrome-plated to resist rusting. Set comes with convenient plastic pouch.
9 KT 4388—Wt. 2 lbs. 5 oz. . . . Set \$8.99

Catalog Number	Size (in.)	Length (in.)	Shpg. wt. (lb. oz.)	Each
9 KT 43660	3/4 x 1 1/8	4 1/4	8 oz.	\$1.59
9 KT 43661	1 x 1 1/8	5 1/4	8 oz.	1.69
9 KT 43662	1 1/4 x 1 1/8	6 1/4	9 oz.	1.89
9 KT 43663	1 1/2 x 1 1/8	8	11 oz.	2.09
9 KT 43664	1 3/4 x 1 1/8	9 1/4	12 oz.	2.39



CRAFTSMAN Sockets

REG. U.S. PAT. OFF.

..hot-forged to take 25% more stress than ordinary sockets

Large $\frac{1}{2}$ - and $\frac{3}{4}$ -inch drive sockets are hot-forged for extra strength. Thinner walls, no shoulders (grip nut at full depth) ... up to 25% lighter. Polished "Super-Tuff" steel sockets ... heat-treated, tempered, chrome-nickel-plated. See guarantee below.



Use $\frac{1}{2}$ -inch drive for work in automotive, industrial and aircraft work ... heavy-duty $\frac{1}{2}$ -in. for machinery installation, heavy equipment. Both exceed Federal Specifications GGG-W-641d, Type II, Classes 1, 2 or 3.

$\frac{1}{2}$ -inch square drive Sockets

Catalog Number	Size (inches)	Opening (inches)	Shp. wt.	Each
9 KT 44054	$\frac{1}{2}$	6	4 oz.	89c
9 KT 44055	$\frac{1}{2}$	6	4 oz.	89c
9 KT 44056	$\frac{1}{2}$	6	4 oz.	79c
9 KT 44057	$\frac{1}{2}$	6	5 oz.	79c
9 KT 44221	$\frac{1}{2}$	8	4 oz.	79c
9 KT 44222	$\frac{1}{2}$	8	4 oz.	79c
9 KT 44223	$\frac{1}{2}$	8	4 oz.	89c
9 KT 44224	$\frac{1}{2}$	8	5 oz.	89c
9 KT 44225	$\frac{1}{2}$	8	5 oz.	89c
9 KT 44226	$\frac{1}{2}$	8	6 oz.	99c
9 KT 47501	$\frac{1}{2}$	12	4 oz.	79c
9 KT 47502	$\frac{1}{2}$	12	4 oz.	79c
9 KT 47503	$\frac{1}{2}$	12	4 oz.	89c
9 KT 47504	$\frac{1}{2}$	12	5 oz.	89c
9 KT 47505	$\frac{1}{2}$	12	5 oz.	89c
9 KT 47506	$\frac{1}{2}$	12	6 oz.	89c
9 KT 47507	$\frac{1}{2}$	12	6 oz.	89c
9 KT 47508	$\frac{1}{2}$	12	6 oz.	99c
9 KT 47509	$\frac{1}{2}$	12	6 oz.	99c
9 KT 47510	$\frac{1}{2}$	12	7 oz.	99c
9 KT 47511	$\frac{1}{2}$	12	7 oz.	99c
9 KT 47512	$\frac{1}{2}$	12	7 oz.	1.09
9 KT 47513	$\frac{1}{2}$	12	8 oz.	1.19
9 KT 47514	$\frac{1}{2}$	12	8 oz.	1.29
9 KT 47515	$\frac{1}{2}$	12	8 oz.	1.29
9 KT 47516	$\frac{1}{2}$	12	8 oz.	1.39
9 KT 47517	$\frac{1}{2}$	12	10 oz.	1.49

$\frac{3}{4}$ -inch square drive Sockets (12 pt.)

Catalog Number	Size (inches)	Shp. wt.	Each
9 KT 47541	$\frac{3}{4}$	8 oz.	1.49
9 KT 47542	$\frac{3}{4}$	8 oz.	1.49
9 KT 47543	$\frac{3}{4}$	8 oz.	1.49
9 KT 47544	$\frac{3}{4}$	8 oz.	1.59
9 KT 47545	$\frac{3}{4}$	8 oz.	1.69
9 KT 47546	$\frac{3}{4}$	9 oz.	1.79
9 KT 47547	$\frac{3}{4}$	9 oz.	1.89
9 KT 47548	$\frac{3}{4}$	12 oz.	2.09
9 KT 47549	$\frac{3}{4}$	13 oz.	2.19
9 KT 47551	$\frac{3}{4}$	14 oz.	2.29
9 KT 47552	$\frac{3}{4}$	14 oz.	2.39
9 KT 47553	$\frac{3}{4}$	1 lb.	2.39
9 KT 47554	$\frac{3}{4}$	1 lb.	2.79
9 KT 47555	$\frac{3}{4}$	1 lb.	3.19
9 KT 47556	$\frac{3}{4}$	1 lb.	3.39
9 KT 47557	$\frac{3}{4}$	1 lb.	3.59
9 KT 47558	$\frac{3}{4}$	1 lb.	3.99
9 KT 47559	$\frac{3}{4}$	2 lbs.	4.69
9 KT 47561	$\frac{3}{4}$	2 lbs.	4.89
9 KT 47562	$\frac{3}{4}$	2 lbs.	5.29
9 KT 47563	$\frac{3}{4}$	2 lbs.	5.69

DIFFERENT SOCKET TYPES



Use on hex nuts and bolts. Heavy-duty grip on rounded corners.



For square nuts only (farm machinery and equipment). A must for farm mechanics.



For use on standard hex nuts and cap screws. More turning positions than other types.

GUARANTEE

If any CRAFTSMAN wrench or socket on these two pages fails to give complete satisfaction, return it, and it will be replaced free of charge. This does not apply to tools used in rental service.



$\frac{1}{4}$ -inch square drive. Excellent for ignition, carburetor, radio, electrical and appliance work. Hot-broached. Heavy, industrial-type chrome-nickel plating. Exceed Federal Specifications GGG-W-641d, Type II, Class 1, 2.

Catalog Number	Size (inches)	Points	Wt. (oz.)	Each
9 KT 43490	$\frac{1}{4}$	6	2	49c
9 KT 43491	$\frac{1}{4}$	6	2	49c
9 KT 43492	$\frac{1}{4}$	6	2	49c
9 KT 43493	$\frac{1}{4}$	6	2	49c
9 KT 43494	$\frac{1}{4}$	6	2	49c
9 KT 43495	$\frac{1}{4}$	6	3	49c
9 KT 43496	$\frac{1}{4}$	6	3	49c
9 KT 43497	$\frac{1}{4}$	6	3	49c
9 KT 43498	$\frac{1}{4}$	6	3	49c
9 KT 43499	$\frac{1}{4}$	6	4	49c
9 KT 43600	$\frac{1}{4}$	12	2	49c
9 KT 43601	$\frac{1}{4}$	12	2	49c
9 KT 43602	$\frac{1}{4}$	12	2	49c
9 KT 43603	$\frac{1}{4}$	12	3	49c
9 KT 43604	$\frac{1}{4}$	12	3	49c
9 KT 43605	$\frac{1}{4}$	12	3	49c
9 KT 43606	$\frac{1}{4}$	12	3	49c
9 KT 43607	$\frac{1}{4}$	12	4	49c

$\frac{3}{8}$ -inch square drive. For medium duty, confined areas. Chrome-nickel plated. Exceed same Fed. Specs. as $\frac{1}{4}$ -inch drive at left.

Catalog Number	Size (inches)	Points	Wt. (oz.)	Each
9 KT 43001	$\frac{3}{8}$	6	3	69c
9 KT 43002	$\frac{3}{8}$	6	3	69c
9 KT 43003	$\frac{3}{8}$	6	3	69c
9 KT 43004	$\frac{3}{8}$	6	4	69c
9 KT 43005	$\frac{3}{8}$	6	4	69c
9 KT 43006	$\frac{3}{8}$	6	4	69c
9 KT 43007	$\frac{3}{8}$	6	4	69c
9 KT 43008	$\frac{3}{8}$	6	4	69c
9 KT 44331	$\frac{3}{8}$	12	3	69c
9 KT 44332	$\frac{3}{8}$	12	3	69c
9 KT 44333	$\frac{3}{8}$	12	3	69c
9 KT 44334	$\frac{3}{8}$	12	3	69c
9 KT 44335	$\frac{3}{8}$	12	4	69c
9 KT 44336	$\frac{3}{8}$	12	4	69c
9 KT 44337	$\frac{3}{8}$	12	4	69c
9 KT 44338	$\frac{3}{8}$	12	5	69c

$\frac{3}{8}$ -in. sq. drive for square nuts

Catalog No.	Size (inches)	Points	Wt. (oz.)	Each
9 KT 44341	$\frac{3}{8}$	8	2	79c
9 KT 44342	$\frac{3}{8}$	8	2	79c
9 KT 44343	$\frac{3}{8}$	8	3	79c
9 KT 44344	$\frac{3}{8}$	8	3	79c
9 KT 44345	$\frac{3}{8}$	8	3	79c

CRAFTSMAN Extra-deep Sockets



CRAFTSMAN Extra-deep Sockets have strong, thin walls for getting into hard-to-reach places. Especially useful for electronic, automotive and industrial jobs. "Super-Tuff" steel, heat-treated and tempered. Heavy, industrial-type chrome-nickel plating resists rust.

$\frac{1}{2}$ -inch square drive Sockets. 12-point openings. Exceed Fed. Specs. GGG-W-641d, Type II, Class 2, Style II.

Catalog No.	Size (inches)	Shp. wt.	Each
9 KT 47521	$\frac{1}{2}$ -inch	6 oz.	1.39
9 KT 47522	$\frac{1}{2}$ -inch	6 oz.	1.39
9 KT 47523	$\frac{1}{2}$ -inch	6 oz.	1.39
9 KT 47524	$\frac{1}{2}$ -inch	6 oz.	1.49
9 KT 47525	$\frac{1}{2}$ -inch	7 oz.	1.49
9 KT 47526	$\frac{1}{2}$ -inch	8 oz.	1.59
9 KT 47527	$\frac{1}{2}$ -inch	8 oz.	1.69
9 KT 47528	$\frac{1}{2}$ -inch	9 oz.	1.79
9 KT 47529	$\frac{1}{2}$ -inch	9 oz.	1.79
9 KT 47531	$\frac{1}{2}$ -inch	10 oz.	1.89
9 KT 47532	$\frac{1}{2}$ -inch	11 oz.	1.99
9 KT 47533	$\frac{1}{2}$ -inch	12 oz.	2.09

$\frac{3}{8}$ -in. square drive Sockets.

Catalog No.	Size (inches)	Points	Wt. (oz.)	Each
9 KT 43310	$\frac{3}{8}$	12	4 oz.	99c
9 KT 43311	$\frac{3}{8}$	12	4 oz.	1.09
9 KT 43312	$\frac{3}{8}$	12	4 oz.	1.19
9 KT 43313	$\frac{3}{8}$	12	4 oz.	1.19
9 KT 43314	$\frac{3}{8}$	12	5 oz.	1.29
9 KT 43315	$\frac{3}{8}$	12	5 oz.	1.29
9 KT 43317	$\frac{3}{8}$	12	5 oz.	1.39
9 KT 43318	$\frac{3}{8}$	12	7 oz.	1.39
9 KT 43319	$\frac{3}{8}$	12	7 oz.	1.39
9 KT 43320	$\frac{3}{8}$	12	7 oz.	1.39
9 KT 43321	$\frac{3}{8}$	12	7 oz.	1.39
9 KT 43322	$\frac{3}{8}$	12	7 oz.	1.39
9 KT 43323	$\frac{3}{8}$	12	7 oz.	1.39
9 KT 43324	$\frac{3}{8}$	12	7 oz.	1.39
9 KT 43325	$\frac{3}{8}$	12	7 oz.	1.39
9 KT 43326	$\frac{3}{8}$	12	7 oz.	1.39
9 KT 43327	$\frac{3}{8}$	12	7 oz.	1.39
9 KT 43328	$\frac{3}{8}$	12	7 oz.	1.39
9 KT 43329	$\frac{3}{8}$	12	7 oz.	1.39
9 KT 43330	$\frac{3}{8}$	12	7 oz.	1.39
9 KT 43331	$\frac{3}{8}$	12	7 oz.	1.39
9 KT 43332	$\frac{3}{8}$	12	7 oz.	1.39
9 KT 43333	$\frac{3}{8}$	12	7 oz.	1.39
9 KT 43334	$\frac{3}{8}$	12	7 oz.	1.39
9 KT 43335	$\frac{3}{8}$	12	7 oz.	1.39
9 KT 43336	$\frac{3}{8}$	12	7 oz.	1.39
9 KT 43337	$\frac{3}{8}$	12	7 oz.	1.39
9 KT 43338	$\frac{3}{8}$	12	7 oz.	1.39
9 KT 43339	$\frac{3}{8}$	12	7 oz.	1.39

$\frac{3}{8}$ -inch square drive 2-in. Sockets. Thin walls; deeply broached teeth.

Catalog No.	Size (inches)	Points	Wt. (oz.)	Each
9 KT 43571	$\frac{3}{8}$	6	2 oz.	79c
9 KT 43572	$\frac{3}{8}$	6	2 oz.	79c
9 KT 43573	$\frac{3}{8}$	6	2 oz.	79c
9 KT 43574	$\frac{3}{8}$	6	2 oz.	79c
9 KT 43575	$\frac{3}{8}$	6	2 oz.	79c
9 KT 43576	$\frac{3}{8}$	6	2 oz.	79c
9 KT 43577	$\frac{3}{8}$	6	2 oz.	79c
9 KT 43578	$\frac{3}{8}$	6	2 oz.	79c
9 KT 43579	$\frac{3}{8}$	6	2 oz.	79c
9 KT 43580	$\frac{3}{8}$	6	2 oz.	79c
9 KT 43581	$\frac{3}{8}$	6	2 oz.	79c
9 KT 43582	$\frac{3}{8}$	6	2 oz.	79c
9 KT 43583	$\frac{3}{8}$	6	2 oz.	79c
9 KT 43584	$\frac{3}{8}$	6	2 oz.	79c
9 KT 43585	$\frac{3}{8}$	6	2 oz.	79c
9 KT 43586	$\frac{3}{8}$	6	2 oz.	79c
9 KT 43587	$\frac{3}{8}$	6	2 oz.	79c
9 KT 43588	$\frac{3}{8}$	6	2 oz.	79c
9 KT 43589	$\frac{3}{8}$	6	2 oz.	79c

CRAFTSMAN Drag-link Sockets

$\frac{1}{2}$ -inch square drive. Drag-link sockets with screw-driver type bit for slotted nuts on steering gear, shock absorbers. Chrome plated "Super-Tuff" molybdenum steel. Use $\frac{1}{2}$ - and $\frac{3}{4}$ -inch size on trucks.

Catalog Number	Size (inches)	Shipping weight	Each
9 KT 44511	$\frac{1}{2}$ -inch	5 ounces	1.09
9 KT 44512	$\frac{1}{2}$ -inch	5 ounces	1.09
9 KT 44513	$\frac{1}{2}$ -inch	6 ounces	1.19
9 KT 44514	$\frac{1}{2}$ -inch	7 ounces	1.29



No Money Down on anything Sears sells

SEE PAGE 90

Only CRAFTSMAN Ratchet Wrenches have a convenient quick release button

REG. U.S. PAT. OFF.

Just push button and socket is released. No hard pulling. See Back Cover for details.



\$6.99

with release button
1/2-inch drive

1 Our best! In actual factory tests these ratchet wrenches were operated over 1/2 million times under full load without serious wear. (1/2-in. at 120-in. lbs.; 3/4-in. at 400-in. lbs.; 1-in. at 1200-in. lbs.) Drop-forged "Super-Tuff" one-piece steel handles give a smooth, short stroke. Nickel-chrome plated. Reverse lever and quick release button.



\$7.99

Exceed Fed. Specs. GGG-W641d, Type III, Class 2.

Catalog Number	Sq. drive in.	Lg. in.	Shpg. wt. lb. oz.	Each
9 KT 43785	1/2	6 1/2	11	\$6.99
9 KT 44975	3/4	9 1/2	1	8.99
9 KT 44976	1	15	1	9.99

As above but without quick-release button.

9 KT 4317	1/2	5 1/2	6	\$3.99
9 KT 4378	3/4	8 1/2	12	4.99
9 KT 44970	1	9 1/2	1	6.99
9 KT 44971	1 1/2	15	1	7.99
9 KT 4480	3/4	18 1/2	5	13.99

2 Flex-head Ratchet Wrenches. Made of rugged "Super-Tuff" steel for long life. Nickel-chrome plated to resist rust, corrosion. With quick-release button described above, left. Reversing lever. Order size wrench headed from table below.

Catalog Number	Square drive	Length in.	Shipping weight lb. oz.	Each
9 KT 42791	1/2-inch	10 1/2	1	\$7.99
9 KT 44974	3/4-inch	16 1/2	2	10.99

As above but without quick-release button.

9 KT 4279	1/2-inch	10 1/2	1	\$5.99
9 KT 44972	3/4-inch	16 1/2	2	8.99



3 CRAFTSMAN Universal Joints. Swing up to 90 degrees. Square drive. Exceed Federal Specifications GGG-W-641d, Type IV, Class 2.

Catalog No.	Size	Shpg. wt.	Each
9 KT 4280	1/2 in.	2 oz.	\$2.19
9 KT 4435	3/4 in.	3 oz.	2.29
9 KT 4425	1 in.	6 oz.	2.39



4 CRAFTSMAN Stud Remover. Capacity 1/4 to 3/4 inches. 1/2-inch square drive. Forged alloy steel. Removes studs easily and quickly.
9 KT 4457—Shipping wt. 1 lb. \$4.79



5 CRAFTSMAN Ratchet Adapter. 1/2-inch square drive. Reverses. Meets Federal Specifications GGG-W-641d, Type IV, Class 3.
9 KT 4474—Shipping wt. 1 lb. \$5.99



6 CRAFTSMAN Socket Adapters. Change from one square drive to another.

Catalog Number	Drive size	Converts to	Shpg. wt.	Each
9 KT 4256	1/2 in.	3/4 in.	2 oz.	89c
9 KT 4257	3/4 in.	1 in.	2 oz.	89c
9 KT 4258	1 in.	1 1/4 in.	3 oz.	99c
9 KT 4259	1 1/4 in.	1 3/4 in.	3 oz.	99c
9 KT 4271	1 3/4 in.	2 in.	5 oz.	\$1.59



7 1/4-inch square drive Handle Extension. 4 1/2 inches long.
9 KT 4335—Shipping wt. 4 oz. \$1.29




8 Socket Extension. For 1/2-inch square drive. 3/4-inch square female socket in top of shockproof, easy-grip plastic handle for use with ratchet, flex or sliding bar handles. 6 in. long.
9 KT 4337—Shipping wt. 6 oz. \$1.79




9 Flex Extension. 3/4-in. square drive. Flexible cable, 4 in. long. Meets Fed. Specs. GGG-W-641d, Type IV.
9 KT 4336—Shipping wt. 3 oz. \$1.69



10 6-inch Flex Spinner. For 1/2-inch square drive sockets and fittings. Strong, flexible steel cable. Easy-grip plastic handle.
9 KT 4335—Shipping wt. 5 oz. \$2.49



11 Crow-foot Wrenches. Chrome-plated. Use with 1/2-in. drive accessory. Convenient in tight hard-to-reach places.
9 KT 43620—1/2 in. Wt. 2 oz. \$1.39
9 KT 43621—3/4 in. Wt. 3 oz. 1.39
9 KT 43622—1 in. Wt. 3 oz. 1.39
9 KT 43623—1 1/4 in. Wt. 3 oz. 1.49
9 KT 43624—1 1/2 in. Wt. 4 oz. 1.49
9 KT 43625—1 3/4 in. Wt. 4 oz. \$1.59
9 KT 43626—2 in. Wt. 4 oz. 1.69
9 KT 43627—2 1/4 in. Wt. 5 oz. 1.79
9 KT 43628—2 1/2 in. Wt. 5 oz. 1.99
9 KT 43629—3 in. Wt. 6 oz. 2.09

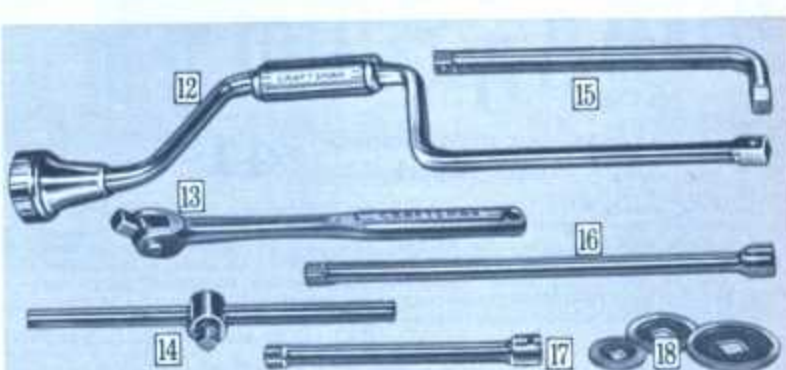

12 CRAFTSMAN Speeder Wrenches. "Super-Tuff" steel. Exceed Federal Specifications GGG-W-641d, Type III, Class 3, Style A.

Catalog Number	Square drive	Length	Shipping weight	Each
9 KT 4281	1/2 in.	15 1/2 in.	9 oz.	\$2.39
9 KT 4427	3/4 in.	16 in.	1 lb. 2 oz.	2.59
9 KT 4416	1 in.	18 in.	2 lbs. 4 oz.	3.39

*No center grip **With rotating center grip

13 CRAFTSMAN Flex Handles. Sturdy hinged joint works at any angle. "Super-Tuff" steel. Positive stops at 0°, 45°, 90°. Exceed Federal Specifications GGG-W-641d, Type III, Class 1.

Catalog Number	Square drive	Length	Shipping weight	Each
9 KT 43523	1/2 in.	6 in.	6 oz.	\$1.79
9 KT 44363	3/4 in.	10 in.	14 oz.	2.99
9 KT 44201	1 in.	15 in.	1 lb. 31 oz.	3.99
9 KT 44202	1 1/4 in.	18 in.	1 lb. 15 oz.	4.79
9 KT 4431	3/4 in.	18 in.	4 lbs.	7.69

14 CRAFTSMAN Slide Bar Handles. Can be used either as "T" or "L" handles. Handy when working in tight places. "Super-Tuff" steel. Meets Federal Specifications GGG-W-641d, Type III, Class 4.

Catalog Number	Square drive	Length	Shipping weight	Each
9 KT 4354	1/2 in.	4 1/2 in.	4 oz.	\$1.39
9 KT 4428	3/4 in.	8 in.	10 oz.	1.59
9 KT 44150	1 in.	9 in.	1 lb.	1.99
9 KT 44151	1 1/4 in.	15 in.	1 lb. 12 oz.	2.49
9 KT 4443	3/4 in.	18 in.	3 lbs. 14 oz.	3.99

15 CRAFTSMAN EH Handles. Use with spark-plug sockets.

Catalog Number	Square drive	Length	Shipping weight	Each
9 KT 4318	3/8 in.	7 in.	9 oz.	\$1.29
9 KT 4402	1/2 in.	8 in.	1 lb. 1 oz.	1.39

16 CRAFTSMAN Extension Bars. Lock on. Exceed Federal Specifications GGG-W-641d, Type IV, Class 4. Added length cases work in tight places.

Catalog Number	Square drive	Length	Shipping weight	Each
9 KT 43530	1/2 in.	3 in.	2 oz.	99c
9 KT 43531	3/4 in.	6 in.	4 oz.	\$1.19
9 KT 43532	1 in.	14 in.	6 oz.	2.09
9 KT 44260	3/8 in.	3 in.	6 oz.	1.09
9 KT 44261	3/8 in.	6 in.	6 oz.	1.29
9 KT 44262	3/8 in.	10 in.	9 oz.	1.69
9 KT 44263	3/8 in.	20 in.	1 lb.	2.69
9 KT 44130	1/2 in.	3 in.	6 oz.	1.19
9 KT 44131	3/4 in.	6 in.	10 oz.	1.49
9 KT 44132	1 in.	10 in.	1 lb. 2 oz.	1.89
9 KT 44134	1 1/4 in.	20 in.	2 lbs. 2 oz.	2.99
9 KT 4441	3/4 in.	8 in.	2 lbs.	2.69
9 KT 4442	1 in.	16 in.	4 lbs.	3.69


17 CRAFTSMAN 6-inch Impact Extension. 1/2-inch square drive. Drop forged alloy steel. Extra rugged to withstand the torque load of electric and air impact tools.
9 KT 4477—Shipping wt. 12 oz. \$1.69

18 CRAFTSMAN Ratchet Speeder Adapters. Fit between ratchet and socket. Set of three for 1/4, 3/8 and 1/2-inch drive ratchets. With plastic pouch.
9 KT 44191—Shipping wt. 4 oz. Set \$1.59

Service foreign-made cars with **CRAFTSMAN** Metric Socket Wrench Sets

REG. U.S. PAT. OFF.

...all unconditionally guaranteed

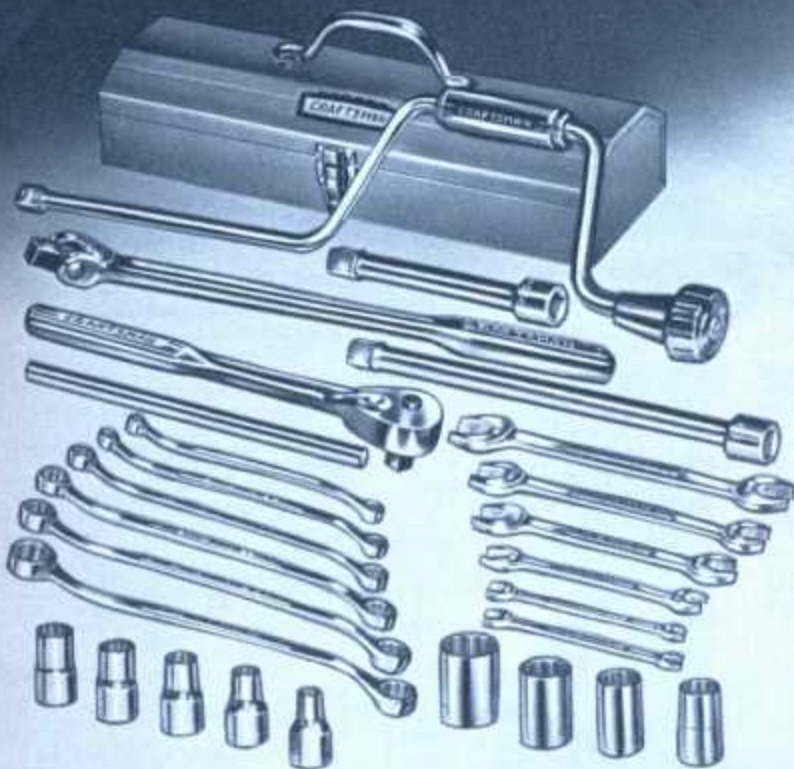

15-piece Metric Socket Wrench Set \$12.49

1/4-in. square drive. Set includes eight 6-point sockets (4 mm to 11 mm). One 5 1/2-in. ratchet wrench. One 6-in. flex handle. Crossbar. Two extensions (3-in. and 6-in.). One 4 1/2-in. slider bar. Set comes complete with box.

9 KT 44143—Shipping weight 1 pound 12 ounces. Set \$12.49



Metric Socket Sets


Eight 12-pt. sockets (9, 10, 12, 13, 14, 15, 17, and 19 mm). Square drive. Metal tray.

3/8-in. drive. Shpg. wt. 13 oz.

9 KT 4347 Set \$6.29

1/2-in. drive. Wt. 1 lb. 5 oz.

9 KT 43484 Set \$6.89



Metric Hex Key Set

Rugged alloy steel takes years of use. Set includes 2, 2.5, 3, 4, 5, 6, 8 and 10 mm keys. Chamfered ends. Just about every size you'll need. All come in convenient plastic pouch.

Shipping weight 14 oz.

9 KT 46675 \$1.09

Economy 21-pc. Metric Set

1/2-in. hex drive—7 1/2-in. ell handle; 3/8-in. hex drive ratchet; adapter; eight 12-pt. sockets (13 to 20 mm); 3/8-in. hex to 3/4-in. square adapter . . . 3/4-in. hex drive—5 1/2-in. spinner handle; 4-in. ell handle; seven 6-pt. sockets (6 to 12 mm). Zinc-plated carbon steel. Plastic pouch; metal tray for sockets. Not CRAFTSMAN.

9 KT 46273—Wt. 2 lbs. 13 oz. Set \$5.99



28 pieces—our most complete Metric Socket-Wrench Set

\$41.99 with tool box

1/2-in. square drive. If you want an excellent assortment of the right size and the right tool, this is the set for you. Hot forged steel sockets have thin walls for use in tight places. Chrome plated to resist rust. Meets the exacting requirements of the professional mechanic.

Set includes: nine 12-pt. sockets (9 to 22 mm), 2 extension bars (6 and 10 inch), one 18-in. spinner, 15-inch flex handle, crossbar, one 9 1/2-inch, exclusive-quick-release ratchet wrench, six box-end and six open end wrenches (6 x 8 to 17 x 19 mm).

Strong steel tool box.

9 KT 44095—Shpg. wt. 13 lbs. Set \$41.99

UNCONDITIONAL GUARANTEE

All CRAFTSMAN wrenches and sockets and hex key sets on these two pages are unconditionally guaranteed. If any item fails to give complete satisfaction, return it, and it will be replaced free of charge. This guarantee does not apply to tools used in rental service.

Individual Metric Sockets

Low as **59¢**



CRAFTSMAN. Hot-forged "Super Tuff" alloy steel; chrome-plated for rust resistance. Deeply broached teeth for positive grip. Thin wall construction lets you get into tight places.

SIZE	Catalog Number	Square Drive	Open-End	Shpg. wt.	Each
9MM	9 KT 44231	1/8	12 pt.	2 oz.	89¢
10MM	9 KT 44232	1/8	12 pt.	2 oz.	89¢
12MM	9 KT 44233	1/8	12 pt.	3 oz.	89¢
13MM	9 KT 44234	1/8	12 pt.	3 oz.	89¢
14MM	9 KT 44235	1/8	12 pt.	4 oz.	99¢
15MM	9 KT 44236	1/8	12 pt.	4 oz.	99¢
17MM	9 KT 44237	1/8	12 pt.	5 oz.	99¢
19MM	9 KT 44238	1/8	12 pt.	6 oz.	99¢
22MM	9 KT 44239	1/8	12 pt.	6 oz.	99¢
9MM	9 KT 44301	3/16	12 pt.	2 oz.	79¢
10MM	9 KT 44302	3/16	12 pt.	2 oz.	79¢
12MM	9 KT 44303	3/16	12 pt.	2 oz.	79¢
13MM	9 KT 44304	3/16	12 pt.	2 oz.	79¢
14MM	9 KT 44305	3/16	12 pt.	2 oz.	79¢
15MM	9 KT 44306	3/16	12 pt.	2 oz.	79¢
17MM	9 KT 44307	3/16	12 pt.	4 oz.	89¢
19MM	9 KT 44308	3/16	12 pt.	5 oz.	89¢
4MM	9 KT 43500	1/16	6 pt.	2 oz.	59¢
5MM	9 KT 43501	1/16	6 pt.	2 oz.	59¢
6MM	9 KT 43502	1/16	6 pt.	2 oz.	59¢
7MM	9 KT 43503	1/16	6 pt.	2 oz.	59¢
8MM	9 KT 43504	1/16	6 pt.	2 oz.	59¢
9MM	9 KT 43505	1/16	6 pt.	2 oz.	59¢
10MM	9 KT 43506	1/16	6 pt.	2 oz.	59¢
11MM	9 KT 43509	1/16	6 pt.	2 oz.	59¢



CRAFTSMAN Metric Wrench Sets

6-piece Open-end Set. Same quality and sizes as 9KT42951 at right. Accurately broached jaw openings. For imported cars. Plastic pouch. Shpg. wt. 1 lb. 3 oz.

9 KT 44501 . . . Set \$7.49

6-piece Box-end Set. Countersunk 12-pt. openings. For imported cars. 6x8, 7x9, 10x11, 12x14, 13x15 and 17x19 mm. Complete with plastic pouch. Shpg. wt. 1 lb. 5 oz.

9 KT 42951 . . . Set \$9.49

Combination 10-piece Set. Open-end and 12-pt. box-end openings. For imported cars. Sizes 6, 8, 9, 10, 12, 13, 14, 15, 17, 19mm. Plastic pouch included. Shpg. wt. 2 lbs.

9 KT 4291 . . . Set \$14.89

CRAFTSMAN Individual Metric Wrenches

SIZE	Catalog No.	Wt.	Each
OPEN END			
6x8MM	9 KT 44502	2 oz.	\$1.09
7x9MM	9 KT 44503	2 oz.	1.19
10x11MM	9 KT 44504	3 oz.	1.29
12x14MM	9 KT 44505	4 oz.	1.39
13x15MM	9 KT 44507	6 oz.	1.59
17x19MM	9 KT 44508	8 oz.	1.79
22x24MM	9 KT 44509	9 oz.	2.29
BOX END			
6x8MM	9 KT 42952	3 oz.	1.49
7x9MM	9 KT 42953	3 oz.	1.59
10x11MM	9 KT 42954	4 oz.	1.69
12x14MM	9 KT 42955	5 oz.	1.79
13x15MM	9 KT 42957	6 oz.	1.89
17x19MM	9 KT 42958	7 oz.	1.99
22x24MM	9 KT 42959	8 oz.	2.19

CRAFTSMAN Combination Metric Wrenches

SIZE	Catalog Number	Shipping weight	Price Each
6MM	9 KT 42910	2 oz.	\$1.39
7MM	9 KT 42911	2 oz.	1.39
8MM	9 KT 42912	2 oz.	1.49
9MM	9 KT 42913	3 oz.	1.49
10MM	9 KT 42914	3 oz.	1.49
11MM	9 KT 42915	4 oz.	1.59
12MM	9 KT 42916	4 oz.	1.59
13MM	9 KT 42917	4 oz.	1.59
14MM	9 KT 42918	5 oz.	1.79
15MM	9 KT 42919	5 oz.	1.79
17MM	9 KT 42920	8 oz.	1.89
19MM	9 KT 42921	9 oz.	1.99
22MM	9 KT 42922	11 oz.	2.29
24MM	9 KT 42923	14 oz.	2.49



CRAFTSMAN Bits

- Phillips-type Bits.
 - 1/4-in. drive. 1 1/2 in. long.
 - 9 KT 42681—No. 1. Wt. 2 oz. . . \$1.09
 - 9 KT 42682—No. 2. Wt. 2 oz. . . 1.09
 - 3/8-in. drive. 2 1/2 in. long.
 - 9 KT 42671—No. 1. Wt. 4 oz. . . 1.29
 - 9 KT 42672—No. 2. Wt. 4 oz. . . 1.29
 - 9 KT 42673—No. 3. Wt. 4 oz. . . 1.29
 - 9 KT 42674—No. 4. Wt. 4 oz. . . 1.29
- Clutch-head Bits.
 - Type A. 1/4-in. drive. 1 1/2 in. long.
 - 9 KT 42671—3/16 in. Wt. 2 oz. . . \$1.19
 - 9 KT 42672—1/4 in. Wt. 2 oz. . . 1.19
 - 9 KT 42673—3/8 in. Wt. 2 oz. . . 1.19
 - Type G. 3/8-in. drive. 2 in. long.
 - 9 KT 42661—3/16 in. Wt. 4 oz. . . \$1.29
 - 9 KT 42662—1/4 in. Wt. 4 oz. . . 1.29
 - 9 KT 42663—3/8 in. Wt. 4 oz. . . 1.29
- Slotted Screwdriver Bits.
 - 1/4-in. drive. 1 1/2 in. long.
 - 9 KT 42681—0.035 in. Wt. 2 oz. . . 99¢
 - 9 KT 42682—0.035 in. Wt. 2 oz. . . 99¢
 - 3/8-in. drive. 2 in. long.
 - 9 KT 42661—0.035 in. Wt. 4 oz. . . \$1.29
 - 9 KT 42662—0.035 in. Wt. 4 oz. . . 1.29
 - 9 KT 42663—0.035 in. Wt. 4 oz. . . 1.29
- Hex Setcrew Bits.
 - 1/4-in. drive. 1 1/2 in. long.
 - 9 KT 42701—3/16 in. Wt. 3 oz. . . \$1.19
 - 9 KT 42702—1/4 in. Wt. 3 oz. . . 1.19
 - 9 KT 42703—3/8 in. Wt. 3 oz. . . 1.19
 - 9 KT 42704—1/2 in. Wt. 3 oz. . . 1.19
 - 9 KT 42705—3/4 in. Wt. 4 oz. . . 1.19
 - 3/8-in. drive. 2 in. long.
 - 9 KT 42660—3/16 in. Wt. 4 oz. . . \$1.29
 - 9 KT 42661—1/4 in. Wt. 4 oz. . . 1.29
 - 9 KT 42662—3/8 in. Wt. 4 oz. . . 1.29
 - 9 KT 42663—1/2 in. Wt. 5 oz. . . 1.29
 - 9 KT 42664—3/4 in. Wt. 5 oz. . . 1.29
 - 9 KT 42665—1 in. Wt. 5 oz. . . 1.29

GUARANTEE: CRAFTSMAN Tools are unconditionally guaranteed to be free from defects in materials or workmanship. Any tool that fails to give complete satisfaction will be replaced free of charge upon return. This does not apply to tools used in rental service.



CRAFTSMAN 10-pc. Socket Wrench Set

3/8-inch square drive. Carefully selected to give you the pieces you need for many jobs around the home. Ideal for home mechanics for work on autos, motorcycles, outboard motors, lawn mowers, power tools and other mechanical equipment.

Thin socket side walls help get in close places. Precision broached, non-slip openings. Made of "Super-Tuff" steel, then hardened and heat-treated.

10 piece set includes: seven 12-point sockets (sizes 3/16, 1/4, 5/16, 3/8, 7/8, 1 1/8 and 1 3/4 in.); 10-inch flex handle; crossbar and box 11x4x2 inches.

9 KT 4395—Shipping wt. 2 lbs. 5 oz. . . . Set \$7.49



21-piece Socket Wrench Set

1/4 and 3/8-inch hexagonal drive. Heat treated tempered carbon steel, zinc plated. 1/4-inch hex parts include: 7 3/4-in. EII handle, ratchet wrench, ratchet adapter and eight 12-point sockets (3/16 to 1 1/8 inch). 3/8-inch hex parts include: 4-in. EII handle, 5 1/4-in. spinner handle, five 6-point sockets (1/4 to 1 1/8 inch) and 2 square sockets (1/4 and 5/16 inch). Metal tray for sockets. Plastic pouch. Not CRAFTSMAN.

9 KT 46271—Shpg. wt. 2 lbs. 12 oz. . . . Set \$4.29



10-piece Socket Set

3/8-inch hexagonal drive. Low priced set made of durable high-carbon steel.

Parts include: 5 3/4-in. spinner handle; 4-inch "EII" handle; five 6-point sockets (1/4 to 1 1/8 in.); and 2 square sockets (1/4 and 5/16 inch). Metal tray. Plastic pouch. Not CRAFTSMAN.

Shipping wt. set 10 oz. 9 KT 46252 Set \$1.19



CRAFTSMAN 18-pc. Socket Wrench Set

3/8-inch square drive. Especially popular in aircraft and automotive factories yet handy for the home craftsman also. "Super-Tuff" alloy steel; tempered, heat treated for strength. Thin, strong socket walls for getting into tight places. Each socket is deep enough to assure a non-slip hold.

18 piece set includes: seven 12-point sockets (3/8 to 1 3/4 in.); 1 1/2-in. spark plug socket; 3 extensions (3, 6, 10 in.); exclusive quick-release reversible ratchet; 8-in. slide-bar handle; 16-in. speeder; 10-in. flex handle; crossbar; universal joint; fitted tool case.

9 KT 43973—Shipping wt. 7 lbs. 11 oz. . . . Set \$24.99



CRAFTSMAN 48-piece Socket Wrench Set

1/4-inch square drive. Ten 6-pt. sockets (3/16 to 1 1/2 in.); nine 6-pt. deep sockets (3/16 to 1 1/2 in.); reversible ratchet; flex handle; crossbar; slide bar handle; 6-in. handle extension; three extensions (3, 6, 14 in.); 4-in. flex extension; 3/4-in. setscrew wrench; five hex wrench sockets (3/16 to 3/4 in.); two Phillips screwdriver-bit sockets (nos. 1 and 2); three clutch-head-bit sockets (3/16 to 3/4 in.); two screwdriver bit sockets; universal joint; five magnetic socket inserts. In box.

9 KT 4439—Shpg. wt. 5 lbs. 3 oz. Set \$36.99



CRAFTSMAN Midget Socket Wrench Sets

12-piece Set. 1/4-inch square drive. For ignition repairs, light electrical work. Made of "Super-Tuff" alloy-steel—heat treated, tempered.

Includes: nine 6-point sockets (3/16 to 1 1/2 inch); flex handle and crossbar. Built to give extra-long life—durability. In handy box.

Shpg. wt. 1 lb. 3 oz. 9 KT 44062 Set \$5.49

16-piece Set. 1/4-inch square drive. Amorecomplete set. "Super-Tuff" alloy-steel. For ignition, refrigerator work.

Includes: nine 6-pt. sockets—3/16, 1/8, 3/16, 1/4, 5/16, 3/8, 1/2 and 1 1/2 in.; reversible ratchet; flex handle; crossbar. With 2 extensions—3 and 6 inch. Slide-bar handle. Box.

Shpg. wt. 1 lb. 12 oz. 9 KT 44146 Set \$11.49

CRAFTSMAN

7-piece Nut

Driver Set with hardened sockets

Exceeds Fed. Specs. GGG-W-641d. Shockproof plastic handles; hollow shanks. Fit hex nuts. Chrome-plated. 1 each of sizes below. Plastic pouch.

Shipping weight 1 lb. 8 oz.

9 KT 4196 Set \$7.79

Individual Nut Drivers. Shipping weight each 7 oz.

Catalog Number	Size in.	Nut size	Each
9 KT 41970	3/16	2-3	\$1.19
9 KT 41971	1/4	4	1.19
9 KT 41972	5/16	5-6	1.19
9 KT 41973	3/8	8	1.19
9 KT 41974	7/8	10	1.29
9 KT 41975	1 1/8	12 1/4	1.29
9 KT 41976	1 3/8	1 3/8	1.29



CRAFTSMAN

9-piece Socket Set

3/8-inch square drive. 12 point sockets of "Super-Tuff" steel. Includes 3/16, 1/4, 5/16, 3/8, 7/8, 1 1/8, 1 3/4 and 1 7/8 inch sockets. Metal tray. Wt. 15 oz.

9 KT 4389 Set \$5.29



CRAFTSMAN 10-pc.

Deep Socket Set

3/8-inch square drive. Makes it easier to get at hard-to-reach nuts and over protruding bolts. 6-pt. sockets, 2 1/2 inches long.

Set includes nine sockets (3/16, 1/4, 5/16, 3/8, 7/8, 1 1/8, 1 3/4, 1 7/8 and 1 3/4 inch)—plus metal tray.

Shpg. wt. 2 lbs. 5 oz.

9 KT 43156 Set \$9.99



Spark Plug Socket with rubber insert

CRAFTSMAN. For installation and removal of spark plugs. Helps protect porcelain. Chrome-plated 1 1/8 in. 6-point openings. Hex plug on drive end for use with wrench.

9 KT 43321—5/8-in. drive.

9 KT 44241—1/2-in. drive.

Shpg. wt. 6 oz. \$1.49



CRAFTSMAN 8-piece

Flexible Socket Set

3/8-inch square drive. Exceeds Federal Specifications GGG-W-641d, Type II, Class 4. 12-pt. openings, universal joints. 3/16, 1/4, 5/16, 3/8, 7/8, 1 1/8, 1 3/4 inch. Box included.

Shipping wt. 1 lb. 9 oz.

9 KT 43812 Set \$14.59



Individual Flexible Sockets

CRAFTSMAN 3/8-inch square drive. Rugged "Super-Tuff" alloy steel. A combination of 6 or 12-point socket and universal joint for greater flexibility.

Catalog Number	Size inches	#points	Shpg. wt.	Each
9 KT 43252	3/16	12	4 oz.	\$2.19
9 KT 43253	1/4	12	4 oz.	2.19
9 KT 43254	5/16	12	4 oz.	2.19
9 KT 43255	3/8	12	4 oz.	2.19
9 KT 43256	7/8	12	4 oz.	2.19
9 KT 43257	1 1/8	12	4 oz.	2.19
9 KT 43258	1 3/4	12	5 oz.	2.19
9 KT 43261	3/16	6	4 oz.	2.19
9 KT 43262	1/4	6	4 oz.	2.19
9 KT 43263	5/16	6	4 oz.	2.19
9 KT 43264	3/8	6	4 oz.	2.19
9 KT 43265	7/8	6	5 oz.	2.19
9 KT 43266	1 1/8	6	5 oz.	2.19
9 KT 43267	1 3/4	6	5 oz.	2.19



If a tool ever breaks in any **CRAFTSMAN** Mechanic's

REG. U. S. PAT. OFF.



CRAFTSMAN
15-piece
Socket
Set
\$11.99

Use on standard hex nuts, cap screws. 1/4-in. square drive forged, 12-pt. "Super-Tuff" steel sockets, heat-treated and tempered. Thinner walls permit use in close quarters. Chrome-plated.

Sizes: 1/16, 1/8, 9/16, 1/2, 5/8, 3/4, 13/16, 7/8, 1 1/16, 1 1/8, 1 1/4, 1 3/4, 1 7/8, 2, 2 1/4, 2 3/4, 3, 3 1/4, 3 1/2, 4, 4 1/2, 5, 5 1/2, 6, 6 1/2, 7, 7 1/2, 8, 9, 10, 11, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100. Metal tray. Meet Fed. Spec. GGG-W-641d, Type II, Class 2. Wt. 3 lbs. 14 oz.

9 KT 4348.....Set \$11.99



CRAFTSMAN
13-piece Set
\$17.79 with tray

Extra-deep forged 1/2-inch-drive sockets. Thin walls allow working in tight places. All parts highly polished, chrome plated. Sockets of "Super-Tuff" alloy steel, heat-treated and tempered for greater strength. 12-pt. openings. Socket sizes: 1/16, 1/8, 9/16, 1/2, 5/8, 3/4, 13/16, 7/8, 1 1/16, 1 1/8, 1 1/4, 1 3/4, 1 7/8, 2, 2 1/4, 2 3/4, 3, 3 1/4, 3 1/2, 4, 4 1/2, 5, 5 1/2, 6, 6 1/2, 7, 7 1/2, 8, 9, 10, 11, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100. Metal tray. Meet Fed. Specifications GGG-W-641d, Type II, Class 2. Wt. 5 lbs. 8 oz.

9 KT 43631.....Set \$17.79



CRAFTSMAN 13-pc.
Socket Wrench Set
\$12.59 with case

1/2-inch drive. Designed to meet the needs of home-shop repairs, and professional mechanics. Forged "Super-Tuff" alloy steel, heat-treated and tempered for strength and nickel-chrome plated to resist rust. Strong, forged sockets have extra-thin walls for getting into tight places.

Set includes ten forged 12-point sockets (1/16, 1/8, 9/16, 1/2, 5/8, 3/4, 13/16, 7/8, 1 1/16, 1 1/8, 1 1/4, 1 3/4, 1 7/8, 2, 2 1/4, 2 3/4, 3, 3 1/4, 3 1/2, 4, 4 1/2, 5, 5 1/2, 6, 6 1/2, 7, 7 1/2, 8, 9, 10, 11, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100). 15-inch flex handle. Crossbar. Comes complete with a strong case. Set opposite page for other features of CRAFTSMAN Socket Wrench Sets.

9 KT 4396—Shipping wt. 5 lbs. 8 oz.Set \$12.59



CRAFTSMAN 19-pc.
Socket Wrench Set
\$29.99 with case

1/2-inch drive. Popular among mechanics in the industrial, automotive and aircraft fields. Ideal for repairing power farm equipment, engines and machinery. All sockets and parts are forged of "Super-Tuff" alloy steel, heat-treated and tempered for super strength and nickel chrome-plated to resist rust.

With ten 12-point sockets (1/16, 1/8, 9/16, 1/2, 5/8, 3/4, 13/16, 7/8, 1 1/16, 1 1/8, 1 1/4, 1 3/4, 1 7/8, 2, 2 1/4, 2 3/4, 3, 3 1/4, 3 1/2, 4, 4 1/2, 5, 5 1/2, 6, 6 1/2, 7, 7 1/2, 8, 9, 10, 11, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100). Two socket extensions (6 and 10 inch). Reversible quick-release ratchet. 18-in. speeder wrench. 15-in. flex handle. Crossbar. Universal joint. 13/16-in. spark plug socket. Rugged hi-impact, fitted case.

9 KT 44097—Shipping wt. 11 lbs. 4 oz.Set \$29.99

CRAFTSMAN Setscrew Wrench Sets

[1 thru 3] Alloy steel with rust-resistant finish. Chamfered ends. Wrench sizes marked on shanks. Designed for use at either end. Plastic pouch included.

1 11-piece Short-arm Set. .050, 1/16, 1/8, 9/16, 1/2, 5/8, 3/4, 13/16, 7/8, 1 1/16, 1 1/8, 1 1/4, 1 3/4, 1 7/8, 2, 2 1/4, 2 3/4, 3, 3 1/4, 3 1/2, 4, 4 1/2, 5, 5 1/2, 6, 6 1/2, 7, 7 1/2, 8, 9, 10, 11, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100. .050, 1/16, 1/8, 9/16, 1/2, 5/8, 3/4, 13/16, 7/8, 1 1/16, 1 1/8, 1 1/4, 1 3/4, 1 7/8, 2, 2 1/4, 2 3/4, 3, 3 1/4, 3 1/2, 4, 4 1/2, 5, 5 1/2, 6, 6 1/2, 7, 7 1/2, 8, 9, 10, 11, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100.

9 KT 46693—Shipping weight 6 ounces.....Set 59c

2 9-piece Long-arm Set. 1/4, 3/8, 1/2, 5/8, 3/4, 13/16, 7/8, 1 1/16, 1 1/8, 1 1/4, 1 3/4, 1 7/8, 2, 2 1/4, 2 3/4, 3, 3 1/4, 3 1/2, 4, 4 1/2, 5, 5 1/2, 6, 6 1/2, 7, 7 1/2, 8, 9, 10, 11, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100.

9 KT 46673—Shipping weight 7 ounces.....Set 69c

3 14-piece Combination Set. Short-arm: .050, 1/16, 1/8, 9/16, 1/2, 5/8, 3/4, 13/16, 7/8, 1 1/16, 1 1/8, 1 1/4, 1 3/4, 1 7/8, 2, 2 1/4, 2 3/4, 3, 3 1/4, 3 1/2, 4, 4 1/2, 5, 5 1/2, 6, 6 1/2, 7, 7 1/2, 8, 9, 10, 11, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100. Long-arm: 1/4, 3/8, 1/2, 5/8, 3/4, 13/16, 7/8, 1 1/16, 1 1/8, 1 1/4, 1 3/4, 1 7/8, 2, 2 1/4, 2 3/4, 3, 3 1/4, 3 1/2, 4, 4 1/2, 5, 5 1/2, 6, 6 1/2, 7, 7 1/2, 8, 9, 10, 11, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100.

9 KT 46683—Shipping weight 11 ounces.....Set \$1.09

4 CRAFTSMAN Short-arm Setscrew Wrenches. Corrosion-resistant finish. Chamfered ends. Use at either end.

Catalog No.	Size	Wt.	Price	Catalog No.	Size	Wt.	Price
9 KT 28130	.050	1 oz.	10c	9 KT 28181	1/4	1 oz.	10c
9 KT 28132	1/16	1 oz.	10c	9 KT 28136	5/32	1 oz.	10c
9 KT 28133	1/8	1 oz.	10c	9 KT 28137	3/16	1 oz.	10c
9 KT 28134	9/16	1 oz.	10c	9 KT 28138	1/2	2 oz.	10c
9 KT 28180	1/4	1 oz.	10c	9 KT 28139	5/8	2 oz.	10c
9 KT 28135	3/4	1 oz.	10c				

CRAFTSMAN Long-arm Setscrew Wrenches. (Not shown.)

Catalog No.	Size	Wt.	Price	Catalog No.	Size	Wt.	Price
9 KT 28170	1/4	1 oz.	10c	9 KT 28174	3/8	2 oz.	15c
9 KT 28171	5/16	1 oz.	10c	9 KT 28175	1/2	3 oz.	15c
9 KT 28185	1/4	1 oz.	10c	9 KT 28176	5/8	3 oz.	15c
9 KT 28172	1/2	1 oz.	10c	9 KT 28177	3/4	5 oz.	25c
9 KT 28186	5/8	2 oz.	10c	9 KT 28178	7/8	7 oz.	39c
9 KT 28173	1 1/4	1 oz.	10c	9 KT 28179	1 1/2	12 oz.	59c

5 Socket Setscrews. Wt. each 1 oz.

Catalog No.	Dim.	Length	Threads	Price
9 KT 28091	#6	1 1/2	32	10c
9 KT 28092	#8	1 1/2	32	10c
9 KT 28093	#10	1 1/2	24	10c
9 KT 28094	#10	1 1/2	32	10c
9 KT 28095	1/4	1 1/2	20	10c
9 KT 28096	3/8	1 1/2	20	10c
9 KT 28097	1/2	1 1/2	18	10c
9 KT 28098	5/8	1 1/2	18	10c
9 KT 28099	3/4	1 1/2	16	10c

6 9-in-1 Steel Set-screw Wrench Set. 9 sizes from .050 to 1 1/2 in. Wt. 6 oz.

9 KT 46281.....Set \$1.39

9-in-1 Steel Set-screw Wrench Set. 9 sizes from 1/4 to 1 1/2 in. Shpg. wt. 8 oz.


9 KT 46282.....Set \$1.49



CRAFTSMAN Heavy Equipment Set
\$54.99 with tool box

18-piece set... 1/2-inch drive. Extra heavy duty. Specially designed for maintenance of heavy equipment. Sockets are hot forged so grain of metal follows socket contour... adds tremendous strength... takes 25% more stress than ordinary sockets. Thinner walls, no shoulders (socket grips nut at full depth). "Super-Tuff" steel is heat-treated, tempered and chrome-nickel plated. Set includes thirteen 12-point sockets (1 1/16, 1 1/8, 1 1/4, 1 3/4, 1 7/8, 2, 2 1/4, 2 3/4, 3, 3 1/4, 3 1/2, 4, 4 1/2, 5, 5 1/2, 6, 6 1/2, 7, 7 1/2, 8, 9, 10, 11, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88, 90, 92, 94, 96, 98, 100). Two extensions (8 and 16-in.), reversible ratchet, 18-in. slide bar handle. In heavy-duty steel tool box.

99 KT 4631K—Shpg. wt. 33 lbs.Set \$54.99

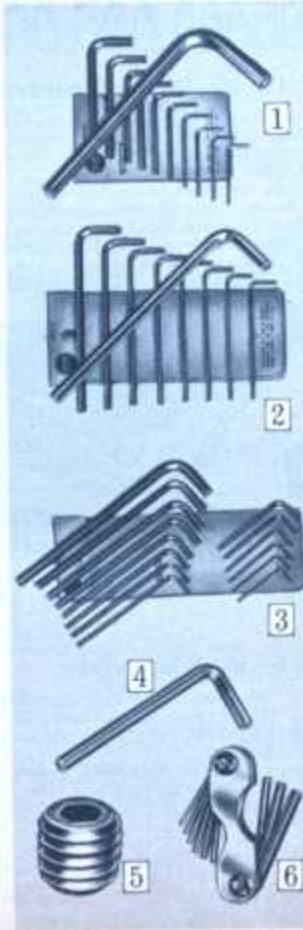

Tool Set, we'll replace it free of charge

• **GUARANTEE:** If any CRAFTSMAN tool (shown on pages 88 through 95) fails to give complete satisfaction, return it, and it will be replaced free of charge. This guarantee does not apply to any tools used in a rental service.

• Sets are top industrial quality. Prices are determined by the make-up of the sets... not by differences in quality.

• Sockets, accessories and wrenches exceed Federal Specifications.*

- **ONLY AT SEARS:**—ratchet wrenches in $\frac{3}{8}$ and $\frac{1}{2}$ -inch drive have quick-release button (see back cover for details).
- Large $\frac{1}{2}$ and $\frac{3}{4}$ -inch-drive sockets are hot forged for tremendous strength. Walls are thinner to fit tight places. No shoulders... sockets grip nut full depth for a secure grip.
- "Super-Tuff" alloy steel, heat treated and tempered.
- Heavy, industrial-type nickel-chrome plating.

CRAFTSMAN 91-piece Set

with $\frac{1}{4}$, $\frac{3}{8}$ and $\frac{1}{2}$ -inch drive parts

It's our most complete set that you can easily carry from job to job. Has the 3 drive sizes ($\frac{1}{4}$, $\frac{3}{8}$, $\frac{1}{2}$ in.) and additional tools you need most, plus a roomy heavy-duty tool box. And the entire set weighs only 26 pounds.

\$58⁰⁰ Tool Box included

More than twice the pieces of the set below but you pay only \$5.01 more. Added $\frac{3}{8}$ -in. drive for more torque in tight places for jobs on cars, farm equipment.

$\frac{1}{4}$ -in. square drive parts. Nine 6-point sockets ($\frac{3}{16}$ to $\frac{3}{8}$ in.); 6-in. flex handle, extension bar; box.

$\frac{3}{8}$ -in. sq. drive parts. Seven 12-point sockets ($\frac{3}{8}$ to $\frac{1}{2}$ in.); 12-in. spark plug socket; quick-release reversible ratchet; 10-in. flex handle; 3-in. extension bar and $\frac{3}{8}$ -in. socket adapter.

$\frac{1}{2}$ -in. square drive parts. Twelve 12-pt. sockets ($\frac{1}{2}$ to $1\frac{1}{4}$ in.); 3 extra-deep sockets ($\frac{3}{4}$, $\frac{1}{2}$, $\frac{3}{4}$ in.); 9 $\frac{3}{4}$ -in. quick-release reversible ratchet; 15-in. flex handle; 6-in. extension bar.

Miscellaneous Tools: 5 open-end wrenches ($\frac{3}{8}$ x $\frac{1}{2}$ to $\frac{3}{4}$ x $\frac{3}{4}$ in.); 10 midjet combination ignition wrenches ($\frac{1}{2}$ x $\frac{3}{16}$ to $\frac{5}{8}$ x $\frac{3}{16}$ in.); 11-pc. hex key set; 3 screwdrivers ($\frac{1}{4}$ x 4, $\frac{1}{4}$ x 6 in. and No. 2 Phillips); 1 $\frac{1}{2}$ -in. cold chisel; 2 $\frac{1}{2}$ -in. pin punch; $\frac{3}{4}$ -in. center punch; hacksaw; 10 blades; 5-pc. magnetic socket insert set.

With steel tool box, 18 in. long; 8 in. wide; 9 in. high. Tote tray, 99 KT 33052K—Ship. wt. 26 lbs. \$6 monthly... Set, Cash \$58.00



CRAFTSMAN 45-piece Set

with $\frac{1}{4}$ and $\frac{1}{2}$ -inch drive parts

\$52⁹⁹ Tool Box included

$\frac{1}{4}$ -in. sq. drive parts. Nine 6-pt. sockets ($\frac{3}{16}$, $\frac{1}{8}$, $\frac{3}{16}$, $\frac{1}{4}$, $\frac{5}{16}$, $\frac{3}{8}$, $\frac{1}{2}$, $\frac{3}{4}$ and $\frac{1}{2}$ in.). Reversible ratchet. 2 extensions (3, 6 in.). 6-in. flex handle. Crossbar, 4 $\frac{1}{2}$ -in. slide bar handle. Box. For light-duty use on refrigerator, ignition work.

$\frac{1}{2}$ -in. sq. drive parts. Thirteen 12-pt. sockets ($\frac{1}{2}$ to $1\frac{1}{4}$ in.). Three 12-pt. deep sockets ($\frac{3}{4}$, $\frac{1}{2}$, $\frac{3}{4}$ in.). Three 8-pt. sockets ($\frac{3}{4}$, $\frac{1}{2}$, $\frac{3}{4}$ in.). Quick-release, reversible ratchet. 3 socket extensions (3, 6, 10 in.). 9-in. slide bar handle. 18-in. speeder. 15-in. flex handle. Crossbar, $\frac{3}{4}$ -in. universal joint.

With steel tool box, 19 $\frac{3}{4}$ in. long; 6 in. wide; 6 in. high. 99 KT 44118C2—Ship. wt. 22 lbs. \$6 monthly... Set, Cash \$52.99
9 KT 44117—As above, without tool box. Wt. 14 lbs... Set 47.99



CRAFTSMAN 36-piece Set

with $\frac{1}{4}$ and $\frac{3}{8}$ -inch drive parts

\$41⁹⁹ Tool Box included


$\frac{1}{4}$ -in. square drive parts. Nine 6-pt. sockets ($\frac{3}{16}$, $\frac{1}{8}$, $\frac{3}{16}$, $\frac{1}{4}$, $\frac{5}{16}$, $\frac{3}{8}$, $\frac{1}{2}$, $\frac{3}{4}$ and $\frac{1}{2}$ in.). 2 extensions (3, 6 in.). Reversible ratchet. 4 $\frac{1}{2}$ -in. slide bar handle. 6-in. flex handle. Crossbar. Box. For refrigerator, ignition work.

$\frac{3}{8}$ -in. square drive parts. Seven 12-pt. sockets ($\frac{3}{8}$ to $\frac{1}{2}$ in.). Three 12-pt. deep sockets ($\frac{3}{4}$, $\frac{1}{2}$, $\frac{3}{4}$ in.). 3 extensions (3, 6 and 10 in.). Quick-release, reversible ratchet. 8-in. slide bar handle. 16-in. speeder. 10-in. flex handle. Crossbar. Universal joint. For medium-duty use on car repairs, home jobs.

With steel tool box 19 $\frac{3}{4}$ in. long; 6 in. wide; 6 in. high. 99 KT 44018C2—Shipping weight 16 pounds... Set \$41.99

Same as set above, but without tool box.
9 KT 44017—Shipping weight 7 lbs. 4 oz... Set 37.99

*Exceed Federal Specifications, GGG-W-6414 and GGG-W-6364.

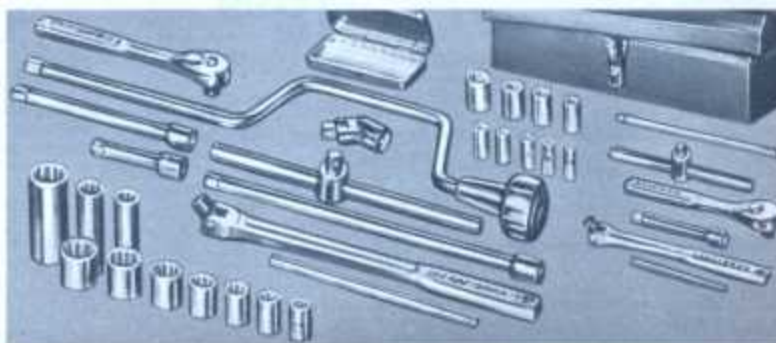

No Money Down on anything Sears sells

SEE PAGE 90

All CRAFTSMAN Tool Sets have exclusive

REG. U.S. PAT. OFF.



Note for both pages:
Prices are determined
by the size of sets, not
by differences in their
quality. Sears tool sets
are of only one quality
... the best.

CRAFTSMAN 119-piece Tool Set

REG. U.S. PAT. OFF.

$\frac{1}{4}$, $\frac{3}{8}$ and $\frac{1}{2}$ -in. drive parts
... plus selected hand tools **\$99⁹⁹** without
tool chest

$\frac{1}{4}$ -in. square drive: Nine 6-point sockets ($\frac{1}{8}$ to $\frac{1}{2}$ -in.); reversible
ratchet; 6-in. flex handle; crossbar.


$\frac{3}{8}$ -in. sq. drive: Five 8-pt. sockets ($\frac{1}{4}$ to $\frac{1}{2}$ -in.); seven 12-pt. sockets
($\frac{1}{8}$ to $\frac{1}{2}$ -in.); 3 extensions (3, 6 and 10-in.); 16-in. speeder;
10-in. flex handle; crossbar; 8-in. slide bar handle; quick-release ratchet; univ. joint.

$\frac{1}{2}$ -in. square drive: Thirteen 12-point sockets ($\frac{1}{8}$ to $\frac{1}{2}$ -in.); five
8-point sockets ($\frac{1}{8}$ to $\frac{1}{2}$ -in.); 3 extensions (3, 6, 10-inches); 18-in. speeder;
15-in. flex handle; crossbar; 9-in. slide bar handle; quick-release
reversible ratchet; universal joint.

Miscellaneous Tools: 11 hex key wrenches; 6 open-end and 6 long box-end
wrenches ($\frac{3}{16}$ to $\frac{1}{2}$ -in.); 3 short box-end wrenches ($\frac{1}{4}$ to $\frac{1}{2}$ -in.); 5-pc. punch, chisel set; 3 screwdrivers (4, 6, 8-in.); 10-pc. combination
ignition wrench set; 3-pc. ratchet-speeder adapter; 12-oz. ball-pein
hammer; hacksaw with 10 blades. Chest (26x11 $\frac{1}{2}$ x10 in.), lock, 2 keys.

99 KT 43459K2—With chest, Wt. 46 lbs. \$10.50 monthly Set. Cash \$125.95
99 KT 43383K—Without chest, Wt. 29 lbs. \$9.00 monthly Set. Cash 99.99

See Guarantee on opposite page ... see
pages 86 and 88 for wrench and socket features

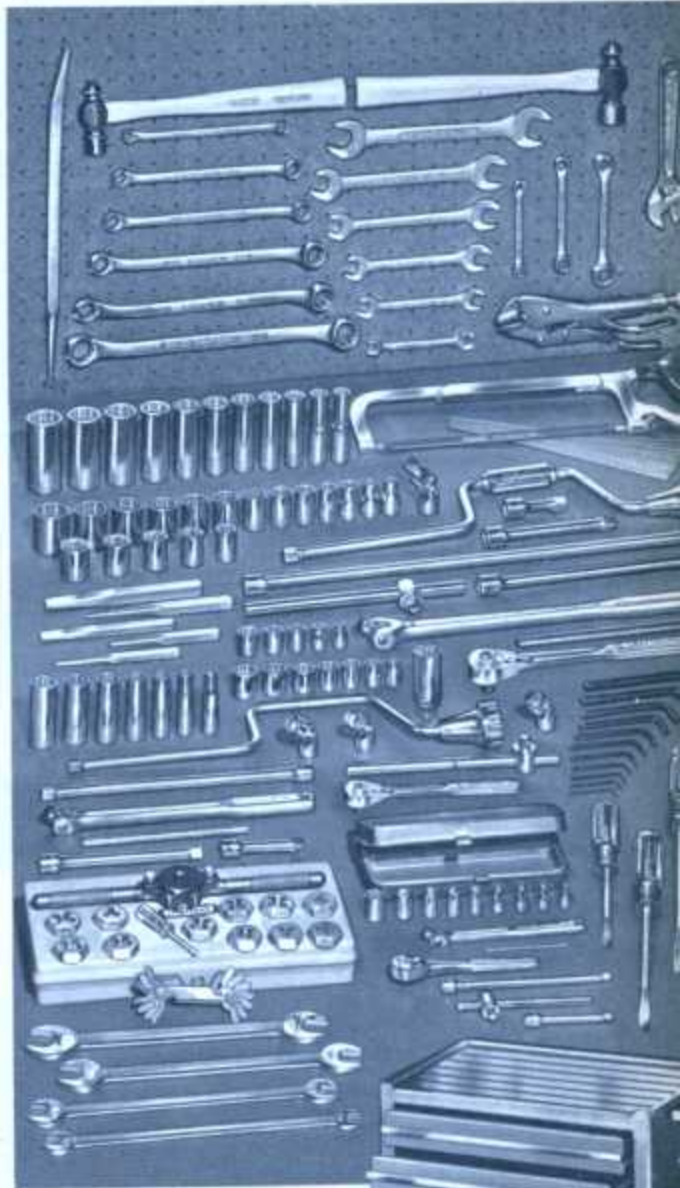

CRAFTSMAN

REG. U.S. PAT. OFF.

155-pc. Tool Set

$\frac{1}{4}$, $\frac{3}{8}$ and $\frac{1}{2}$ -inch drive parts
... selected hand tools
plus more special sockets

\$143⁹⁵ without
cabinet

$\frac{1}{4}$ -in. square drive: Nine 6-pt. sockets ($\frac{1}{8}$ to $\frac{1}{2}$ -in.); reversible ratchet; 6-in.
flex handle; crossbar; two extensions (3, 6-in.); 4 $\frac{1}{2}$ -in. slide bar. Hinged box.

$\frac{3}{8}$ -in. square drive: Five 8-pt. sockets ($\frac{1}{4}$ to $\frac{1}{2}$ -in.); seven 12-pt. sockets ($\frac{1}{8}$
to $\frac{1}{2}$ -in.); seven 12-pt. extra-deep sockets ($\frac{1}{8}$, $\frac{1}{4}$, $\frac{1}{2}$, $\frac{3}{4}$, $1\frac{1}{4}$, $1\frac{1}{2}$, $1\frac{3}{4}$ -in.); two
12-pt. flexible sockets ($\frac{1}{2}$ and $\frac{3}{4}$ -in.); three extensions (3, 6, 10-in.); 16-in.
speeder wrench; 10-in. flex handle; crossbar; 8-in. slide bar handle; quick-release
reversible ratchet; universal joint; $\frac{1}{2}$ -in. spark plug holding socket.

$\frac{1}{2}$ -in. square drive: Thirteen 12-pt. sockets ($\frac{1}{8}$ to $\frac{1}{2}$ -in.); five 8-pt. sockets
($\frac{1}{8}$ to $\frac{1}{2}$ -in.); eleven 12-pt. deep spark-plug sockets ($\frac{1}{2}$ to $1\frac{1}{2}$ -in.); four extensions
(3, 6, 10, 20-in.); 15-in. flex handle; crossbar; 9-in. slide bar handle; 18-in.
speeder wrench; quick release reversible ratchet; universal joint.

Misc. Tools: Wrenches, 6 open-end ($\frac{3}{16}$ to $\frac{1}{2}$ -in.); 6 long box-end ($\frac{3}{16}$
to $\frac{1}{2}$ -in.); 3 short box-end ($\frac{1}{4}$ to $\frac{1}{2}$ -in.); 4 tappet ($\frac{1}{8}$ to $\frac{1}{2}$ -in.); 11 hex keys; 10-in. locking plier; 8-in. adjustable-end; 5-pc. punch,
chisel set; 15-pc. hex die set; 16-in. pry bar; 3 screwdrivers (4, 6, 8-in.); 2 ball-
pein hammers (8, 12-oz.); hacksaw with 10 extra blades; 3-drawer roller cabinet.
99 KT 43464N2—With cabinet, Wt. 135 lbs. \$13.50 monthly Set. Cash \$189.95
99 KT 43393L—Without cabinet, Wt. 41 lbs. \$11.50 monthly Set. Cash 143.95

release-button on $\frac{3}{8}$ and $\frac{1}{2}$ -inch drive ratchets



*Only Sears has
this feature . .*

Just press the button and
socket is released. No
hard pulling or prying
needed. (See back cover.)

CRAFTSMAN
REG. U.S. PAT. OFF.

215-piece Tool Set

$\frac{1}{4}$, $\frac{3}{8}$, $\frac{1}{2}$ and $\frac{3}{4}$ -inch
drive parts . .

plus

more special sockets and
tools than in any other
set Sears sells

\$222⁹⁵
without cabinet



A complete set for the professional or home mechanic

This superb set is designed to meet the most rigid requirements of the professional mechanic and the man demanding a complete mechanic's shop at home. See pages 86 and 88 for features of the tools.

$\frac{1}{4}$ -inch square drive parts. Nine 6-pt. sockets ($\frac{1}{8}$ to $\frac{1}{2}$ -in.); reversible ratchet; 6-inch flex handle; crossbar; 2 extensions (3 and 6-inch); $4\frac{1}{4}$ -in. slide bar handle; box with hinged cover.

$\frac{3}{8}$ -inch square drive parts. Five 8-pt. sockets ($\frac{1}{4}$ to $\frac{1}{2}$ -in.); eight 12-pt. sockets ($\frac{1}{4}$ to $\frac{1}{2}$ -in.); eight 12-pt. extra-deep sockets ($\frac{1}{4}$ to $\frac{1}{2}$ -in.); seven 12-pt. flexible sockets ($\frac{1}{4}$ to $\frac{1}{2}$ -in.); three extensions (3, 6, 10-inch); 16-inch speeder wrench; 10-inch flex handle; crossbar; 8-inch slide bar handle; quick-release reversible ratchet, universal joint and No. 2 Phillips bit.

$\frac{1}{2}$ -inch square drive parts. Fourteen 12-pt. sockets ($\frac{1}{4}$ to $\frac{1}{2}$ -in.); five 8-pt. sockets ($\frac{1}{4}$ to $\frac{1}{2}$ -in.); twelve 12-pt. deep sockets ($\frac{1}{4}$ to $\frac{1}{2}$ -in.); four extensions (3, 6, 10, 20-inch); 15-inch flex handle; crossbar; 9-inch slide bar handle; 18-inch speeder wrench; quick-release rev. ratchet; stud remover and universal joint.

$\frac{3}{4}$ -inch square drive parts. Eight 12-pt. sockets ($\frac{1}{4}$ to $\frac{1}{2}$ -in.); 8-inch extension; 18-inch slide bar handle.

Other Tool Sets: 11-pc. hex key set; 8-pc. long box-end wrench set; 4-pc. midjet box-end wrench set; 6-pc. combination wrench set; 9-pc. open-end wrench set; 7-pc. screwdriver set (4, 6, 8-inch; Phillips Nos. 1, 2, 3; stubby); 12-pc. punch, chisel set; 15-pc. hex die set; 3-pc. ratchet speeder adapter set.

Miscellaneous Tools. Three short box-end wrenches; four tappet wrenches ($\frac{3}{8}$ x $\frac{7}{16}$ to $\frac{1}{2}$ x $\frac{1}{2}$ -in.); line-up punch; offset screwdriver; 12-inch pickup tool; arc-joint pliers; 6-inch long-nose pliers; 7-inch diagonal pliers; brake spring pliers; cotter key extractor. Brake adjusting tool; $\frac{3}{4}$ x $\frac{7}{16}$ and $\frac{1}{2}$ x $\frac{7}{16}$ -inch ratchet box-end wrenches; rolling wedge bar; hack saw with ten extra 10-inch blades; 10-inch locking plier wrench; 8-inch adjustable-end wrench; 8 and 12-oz. ball-pein hammers.

Heavy-duty Roller Cabinet. Rolls easily on heavy-duty ball-bearing, 3-in. casters. 3 drawers, large bottom compartment. Sliding front panel, with cylinder lock and keys, covers bottom compartment and locks drawers.

Set with cabinet. Shipping weight 158 lbs.
99KT46307N2—Wt. 158 lbs. \$17.50 mo. Set. Cash \$269.95

Set without cabinet. Shipping weight 64 lbs.
99 KT 46327L—\$15.00 monthly. Set. . . . Cash 222.95

GUARANTEE: If any tool in the sets shown on these pages fails to give complete satisfaction, return it, and it will be replaced free of charge. This does not apply to tools used in rental service.

*No Money Down on
anything Sears sells*

SEE PAGE 95

SEE-INTO CABINETS

Keep even smallest odds and ends handy

Each has clear plastic drawers with dividers that lock tightly in place. Cabinets can be stacked or wall mounted. Use anywhere you need them.



With steel frames

1 30 drawers. Our biggest... almost 600 cubic inches of storage space. The neat, see-through drawers are 2 3/4 inches wide, 5 3/4 inches long and 1 3/4 inches high. Welded steel frame. Slots for hanging. Carrying handle. You'll wonder how you ever got along without this handy organizer. It's 10 inches wide, 6 inches deep and 14 inches high. Gray enamel finish. 9 KT 65384—Wt. 7 lbs. 4 oz.\$6.99

2 18 drawers. 2 3/4 in. wide; 5 3/4 in. long, 1 3/4 in. high. Welded steel frame. Slots for hanging on wall. Overall cabinet measures 10 in. wide, 6 in. deep and 9 in. high. Gray enamel finish. 9 KT 65376—Wt. 4 lbs. 7 oz.\$4.99

3 12 drawers. 6 regular drawers 1 1/4 in. high, 6 bigger drawers (2 in. high). Overall measurements 9 3/4 x 6 1/4 x 7 1/4 in. high. White onyx color. 9 KT 65361—Wt. 3 lbs. 10 oz.\$3.99

4 21 drawers. 1 1/4 inches high. Overall measurements 9 3/4 inches wide, 6 1/4 inches deep and 10 3/4 inches high. Black onyx color. 9 KT 65375—Wt. 5 lbs. 7 oz.\$4.99

5 10 drawers. Nine 1 1/4-in. high drawers and 1 jumbo drawer (5 3/4 x 8 3/4 x 2 1/4 in.). Overall measurements: 9 3/4 x 6 1/4 x 7 1/4 in. high. White onyx color. 9 KT 65372—Wt. 3 lbs. 5 oz.\$3.69

6 9 drawers. Each drawer 1 1/4 inches high. Overall measurements: 9 3/4 inches wide, 6 1/4 inches deep and 5 inches high. White onyx color. 9 KT 6537—Wt. 2 lbs. 6 oz.\$2.79



With durable plastic frames

7 12 drawers. 6 regular drawers 1 1/4 in. high, 6 bigger drawers (2 in. high). Overall measurements 9 3/4 x 6 1/4 x 7 1/4 in. high. White onyx color. 9 KT 65361—Wt. 3 lbs. 10 oz.\$3.99

8 21 drawers. 1 1/4 inches high. Overall measurements 9 3/4 inches wide, 6 1/4 inches deep and 10 3/4 inches high. Black onyx color. 9 KT 65375—Wt. 5 lbs. 7 oz.\$4.99

9 10 drawers. Nine 1 1/4-in. high drawers and 1 jumbo drawer (5 3/4 x 8 3/4 x 2 1/4 in.). Overall measurements: 9 3/4 x 6 1/4 x 7 1/4 in. high. White onyx color. 9 KT 65372—Wt. 3 lbs. 5 oz.\$3.69

10 9 drawers. Each drawer 1 1/4 inches high. Overall measurements: 9 3/4 inches wide, 6 1/4 inches deep and 5 inches high. White onyx color. 9 KT 6537—Wt. 2 lbs. 6 oz.\$2.79

You can buy anything in this book on Sears Easy Terms with NO MONEY DOWN

Up to 18 months to pay on anything Sears sells

Up to 24 months to pay on Power Tools and Arc Welders

It's easy to open an account

Just ask at any Sears Retail Store or Catalog Sales Office—or call our helpful telephone sales people—or use the application form on the back of Sears catalog order blank.

See actual table of terms in Sears Big Catalog or at any Sears outlet

Important Note on Prices

We reserve the right to change the price on any item in this catalog should the Federal, State or Local governments increase by taxes or otherwise the cost or selling price of any item in this book... we reserve the right to add such taxes or other increases of cost to the prices shown. Prices shown are for continental U.S. only. (Because of transportation costs, prices in your Sears, Roebuck and Co. retail store may vary slightly from the prices shown in this catalog.)

SEARS GUARANTEE

We guarantee that every article in this catalog is accurately described and illustrated. If for any reason whatever you are not satisfied with any article purchased from us, we want you to return it to us. We will exchange it for exactly what you want, or will return your money.

SEARS, ROEBUCK AND CO.

GENERAL INDEX

Abrasives.....30, 31, 34	Hoists.....63	Sanders; Sander-Polishers.....52-54
Adhesives.....60	Impact Tool; Accessories.....46, 47	Sander, Belt and Disc.....14
Air Tools.....46	Instruction Manuals.....3, 29	Saw Blades, Circular.....10, 11
Automotive Tools.....64, 85	Jig Saws, Blades.....13	Saws, Hand.....64, 65, 73
Axes.....64	Jointer-Planers.....14	Sawhorse Brackets.....65
Band Saws.....12	Knives, Knife Sets.....66, 77	Screwdrivers.....77, 80, 84
Battery Tools.....85	Lathes, Metal; Accessories.....20-23	Scribers.....76
Bench Saws.....29, 97	Lathes, Wood; Accessories.....13	Screw Wrenches.....80, 92
Bits.....44, 45, 68, 90	Levels.....67, 70, 71	Sewer Rods.....59
Blow Torches.....56	Linestuffs; Accessories.....29	Shaper; Cutters.....14
Body and Fender Tools.....85	Lights, Tool Bench.....29	Sharpening Saw.....11
Braces.....68	Linoleum Knife.....66	Sharpening Stones.....61
Brake Tools.....85	Lubricants.....60	Snips.....79
Bricklayers' Tools.....72	Machine Oil.....60	Sockets, Socket Wrenches.....88-95, 100
Cable Stripper.....76	Magnets.....73	Soldering Irons, Guns.....57, 77
Calipers.....72	Magnifying Glass.....75	Speed Indicator.....74
Cement Tools.....72	Mandrels.....35	Squares.....69, 75
Chisels.....18, 61, 81	Masonry Tools.....72	Stands for Drills.....43
Chucks.....18, 19, 23	Micrometers.....75	Staplers.....63
Clamps.....67, 74	Miter Boxes.....65	Star Drills.....81
Compasses.....67	Molding Cutter Head, Bits.....9	Steel Letters.....56
Cutter Key Extractor.....80	Motors, Accessories.....36, 37	Stencil Sets.....56
Crescent.....97	Motors, Replacement.....36	Stocks.....59
Cross Rim Wrench.....85	Paint Scraper.....66	Surveying Instruments.....70, 71
Cutting Nippers.....77-79	Perforated Board.....97	Switches, Electrical.....36
Dado Sets.....9	Pickup Tools.....73	Tap and Die Sets.....82, 83
Dial Test Indicators.....74	Pipe-threading Tools.....59	Tapes.....69
Die Sets.....59, 82, 83	Planer-Moulder.....15	Thread-cutting Tools.....59, 82, 83
Dispenser.....97	Planers.....38	Tire Tools.....85
Drill Attachments, Electric.....45	Plasterers' Tools.....72	Tool Board, Perforated.....97
Drill Presses.....18, 19, 23	Pliers.....77-79, 85	Tool Boxes, Cabinets.....98, 99, 99
Accessories.....18, 19, 23	Plumbers' Tools.....58, 59	Tool Holders.....81
Drills, Elec.; Accessories.....40-45	Plumb Line.....69	Tool Stands.....29
Drills, Hand.....68	Polishers.....52, 53	Torque Wrench.....84
Dry-wall Tools.....72	Polishing Equipment.....30, 31, 33	Transits.....70, 71
Dust Collector.....5, 17, 53	Paucers.....81	Travelers.....72
Electric Hand Saws.....50, 51	Power-Pak.....29	Tubing Tools.....58
Engraving Tool.....56	Precision Tools.....74-77	Twaxers.....79
Files.....73, 85	Propane Torches.....56	Vacuum Cleaners; Accessories.....17
Flaring Tools.....58	Protractors.....35	V-Belts.....35
Flexible Shafts.....37	Pulleys.....35	V-Blocks.....74
Floor Mount Saw.....6	Punches.....67, 76, 81	Vices.....19, 55, 59, 77
Force Cups.....59	Radiol-arm Saws; Accessories.....2-5	Welders, Arc; Accessories.....24, 25, 27
Gauges.....67, 74, 75, 76, 77, 84	Ramphorn.....66	Welding Equipment; Oxy-Acetylene.....26, 27
Gear Puller.....85	Reciprocating Saw.....39	Wire Brushes.....31, 68
Gem Makers; Accessories.....34	Rivet Tools.....83	Work Benches.....97
Glass Cutters.....34	Rozary Grinder.....39	Wrecking Bars.....62
Glues, other Adhesives.....31, 60	Router, Portable; Accessories.....38	Wrenches.....58, 77, 85, 86, 87, 89
Grinders.....31-33, 39	Rules.....69, 74	
Grinding Wheels.....31-33, 39	Sabre Saws; Blades.....48-49	
Hack Saws, Power.....28	Safety Goggles.....33	
Hammers.....62, 85	Sanding Equipment.....30, 31, 52-54	
Heatshets.....64		



CRAFTSMAN \$65.99

Work Bench With drawers, door

2 ft. x 5 ft. x 33 1/2 in. high. 1-in. top is tempered hardboard (flakeboard core). Steel cross-braced frame. Open back. Door perforated for tool-hanging hooks; has tumbler lock, keys; hides 2 shelves. 5 drawers 16 1/2 x 15 1/4 x 4 3/4 in. high. Unassembled.

99 KT 10261N9—Shpg. wt. 154 lbs. \$65.99

Bench only. No drawers, door, shelves. Wt. 97 lbs. 99 KT 10265N2—(Drawers, etc. page 3) ... \$33.99



Industrial Bench

\$26.99

Sturdy 2x5 ft. long bench stands 32 1/2 inches high. Steel legs, feet, cross rails. 1 in. tempered hardboard top (flakeboard core). Shelf adds support and storage space. Holds 2 drawers (not included, see page 3). Shipped unassembled.

99 KT 10271N2—Shipping wt. 79 lbs. \$26.99



CRAFTSMAN
All-purpose
Bench Legs

Extra heavy gauge steel legs. Just one set of these and you can make inexpensive workbench, table, power tool stand or ping-pong table. With just two sets you can make your own wall length bench or corner cabinet.

Included in set: four 32-in. legs, four 20 3/4-in. cross-braces, nuts, bolts and instructions. Shipping weight 28 pounds.

99 KT 1022K...Set \$10.99



CRAFTSMAN
Auto Creeper


Four plate-type angle casters with 2 1/2-inch wheels. Rolls easily, pivots in any direction... even on rough floors. Hardwood body, weather-resistant lacquer finish. Padded headrest. Wipes clean. 16 in. wide; 36 in. long.

Shipping weight 13 lbs. 99 KT 4548L... \$9.49

Heavy-duty
Fender Cover

Keeps car fender clean and protects it from dropped tools. Vinyl plastic, laminated to sponge rubber back... won't slide. Resists oil, grease... even battery acid. Trough holds tools right where you need them. 26x40 in. long. Shpg. wt. 3 lbs.

99 KT 4548A... \$3.99

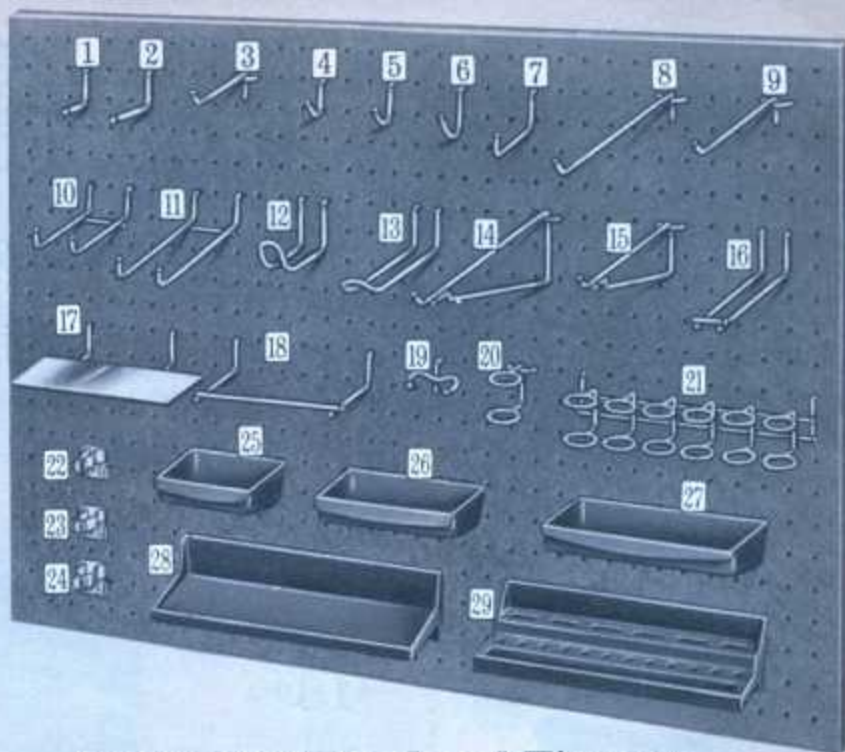

Perforated Board and Fixtures

Your walls become useful storage space when you use perforated board and fixtures. Keep tools or kitchen utensils right at hand... but never in your way. Work areas stay clear... tools always hang within easy reach.

The fixtures (listed at right) anchor in any 1/4-inch-thick perforated board with 1/4-inch diameter holes 1 inch apart.

Items (1) through (24) are zinc-plated steel. Organizers (25) through (29) are high-impact polystyrene plastic with bins that are 1 1/2 inches deep.

2x4-foot Hardboard Perforated Panels. 1/4-inch thick. With 1/4-inch diameter holes 1 inch apart. Tempered hardboard is more durable. Allow 10 lbs. postage (postal regulations).

99 KT 75523L—Tempered Panel 98c

99 KT 7561L—Standard Panel 69c

Mounting Hardware Set for above panels. Contains 6 each, screws, spacers and anchors.

9 KT 7538—Shipping wt. 3 oz. Set 29c

18-piece garage-storage Hardware Kit. (Not shown.) For 1/4-inch-thick perforated board with 1/4-inch holes (not for the 1/4-inch board shown on this page). 4 small and 4 medium loop-hooks, 4 medium and 2 large single-straight hooks, 1 large and 1 medium double-straight-hooks, 2 shelf brackets, screws, spacers.

9 KT 7576—Shipping wt. 2 lbs. Kit \$1.89

Workshop Dispenser. Keeps nails, screws together. Easy to use... you can find what you need before opening the jars. Twelve 4-oz. jars mounted on red enameled steel frame. Entire frame pivots on black enameled steel bracket. Complete with mounting screws.

Shipping weight 4 lbs. 2 oz. 9 KT 7203 \$2.59

	Catalog No.	Description	Size	Quantity	Wt.	Price
(1)	9 KT 7531	Hooks—Straight	Small—1-in.	Fig. of 10	6 oz.	Fig. 29c
(2)	9 KT 7532	Hooks—Straight	Med.—1 1/2-in.	Fig. of 9	6 oz.	Fig. 29c
(3)	9 KT 7533	Hooks—Straight	Large—2-in.	Fig. of 3	5 oz.	Fig. 29c
(4)	9 KT 7534	Loops	Small	Fig. of 10	5 oz.	Fig. 29c
(5)	9 KT 7535	Loops	Medium	Fig. of 9	6 oz.	Fig. 29c
(6)	9 KT 7536	Loops	Large	Fig. of 4	5 oz.	Fig. 29c
(7)	9 KT 7537	Loops	Extra large	Fig. of 5	5 oz.	Fig. 29c
(8)	9 KT 7544	Straight Single Hook	6 in.	1 only	3 oz.	En. 10c
(9)	9 KT 7545	Straight Single Hook	4 in.	1 only	3 oz.	En. 9c
(10)	9 KT 7550	Straight Double Hook	1 1/2 x 2 in.	1 only	3 oz.	En. 10c
(11)	9 KT 7551	Straight Double Hook	1 1/2 x 4 in.	1 only	3 oz.	En. 10c
(12)	9 KT 7542	Curved Double Hook	3 in.	1 only	3 oz.	En. 10c
(13)	9 KT 7543	Curved Double Hook	4 1/2 in.	1 only	3 oz.	En. 10c
(14)	9 KT 7540	Shelf Bracket	8 in.	1 only	4 oz.	En. 15c
(15)	9 KT 7541	Shelf Bracket	6 in.	1 only	4 oz.	En. 15c
(16)	9 KT 7549	Shelf Support	4 1/2 in.	1 only	3 oz.	En. 10c
(17)	9 KT 7548	Metal Shelf	3x6 in.	1 only	6 oz.	En. 39c
(18)	9 KT 7546	Hang Bar	2 1/2 x 8 in.	1 only	4 oz.	En. 15c
(19)	9 KT 7553	Plier Holder		Fig. of 4	4 oz.	Fig. 29c
(20)	9 KT 7557	Single Tool Holders	1 lg., 2 small	Fig. of 3	4 oz.	Fig. 29c
(21)	9 KT 7547	6-hole Tool Holder		1 only	7 oz.	En. 49c
(22)	9 KT 7558	Spring Clips	Small	Fig. of 2	4 oz.	Fig. 29c
(23)	9 KT 7560	Spring Clips	Medium	Fig. of 2	4 oz.	Fig. 29c
(24)	9 KT 7559	Spring Clips	Large	Fig. of 2	4 oz.	Fig. 29c
(25)	9 KT 7555	Bin	3 1/2 x 3 in.	Fig. of 5	9 oz.	Fig. 79c
(26)	9 KT 7556	Bin	5x3 in.	Fig. of 4	9 oz.	Fig. 79c
(27)	9 KT 7558	Bin	7x3 1/2 in.	Fig. of 3	9 oz.	Fig. 79c
(28)	9 KT 7557	Shelf	9x3 1/2 in.	1 only	8 oz.	En. 79c
(29)	9 KT 7559	18-tool Holder	9x3 1/2 in.	1 only	8 oz.	En. 79c

Starter Hardware Kits for perforated panels. Fit any 1/4-inch perforated board with 1/4-inch holes 1 inch apart. Select the 19-piece kit for use with one 2x4-ft. panel and the 30-piece kit for two 2x4-ft. panels. Order additional hooks, bins, shelves, etc., from table above.

19-piece Kit. Contains 3 each small and medium single-prong hooks, 3 each small, large and extra-large loop hooks, 2-loop tool holder, 2 plier holders, spacers, screws, anchors.

9 KT 7556—Shipping wt. 12 oz. Kit 79c

30-piece Kit. Contains 18 single-prong hooks, 2 double-prong hooks, 4 spring clips, 4 loop hooks, 1 multi-tool holder, 1 plier holder, plus necessary spacers and screws.

9 KT 7563—Shpg. wt. 1 lb. 4 oz. Kit \$1.89

Magnetic Tool Rack. No clips, hooks, slots or fasteners needed. Magnet holds up to 7 lbs. Chrome-plated steel, magnetized rubber. Permanently magnetized, 12x1 1/4 inches.

Screws. Wt. 12 oz. 9 KT 7252 \$1.59



CRAFTSMAN Sears 97



So strong... in actual tests this **CRAFTSMAN** Mechanic's Tool Box was loaded with 100 lbs. then lifted and lowered thousands of times without any damage to sides, top or bottom

Strong sides, top and bottom are heavy 22-gauge steel. Rigid corners are electrically welded with strong cap-end construction. Extra strong tray supports are welded to front, back and sides of box. Heavy piano-type hinges are full-length for strength and rigidity.

Watershed lip covers hinge to keep out rain... tools stay dry... less problems with rust. Heavy-duty handles with wide comfortable grip. One-piece draw bolts. Partitioned tote tray has tubular steel handle.

\$819
20x34x9 1/2 inches

Years and years of trouble-free use with this sturdy tool box. Gray baked-enamel finish. 30x8 1/2x9 1/2 in. Two draw bolts, padlock, hasp. 99 KT 6512C—Shpg. wt. 12 lbs. \$8.19

Same as above but 18x8x9 inches, no partition in tote tray and polyethylene handle. 99 KT 6500C—Shpg. wt. 11 lbs. \$6.99

Same as 6512C above but 17x7x7 1/2 inches. Combination draw bolt, padlock eye. 99 KT 65013C—Shpg. wt. 8 lbs. \$5.29

CRAFTSMAN REG. U.S. PAT. & TM. TOOL BOXES

Mechanic's "Super-Duty" Tool Box **\$1849**

1 Takes tools up to 24 in. long. Holds over 150 sockets and parts. Divided tote tray. Handle on top and on each end. Two 1-pc. drawbolts. Center lock, 2 keys. 24 1/4x9 1/4x9 3/4 inches. Red baked-enamel finish. 99KT65141K—Wt. 24 lbs. \$18.49

Mechanic's Hip-roof Tool Box **\$699**

2 Partitioned tote tray. Padlock hasp. Plastisol-coated steel handle. 19 1/4x7x8 inches. Gray-enamel finish. 99 KT 6520C—Wt. 9 lbs. \$6.99
As above, but 19 1/2x6x6 inches, no partition in tote tray, single combination drawbolt hasp, polyethylene handle. 99 KT 65161C—Wt. 8 lbs. \$6.19

Mechanic's Tool Box **\$1699**

3 Hip roof... double-cantilever design. 4 trays (2 covered). Watertight base. Padlock hasp. Two 1-pc. drawbolts. 18x10x13 in. Meets Fed. Spec. GGG-T-558, Type II, Class I. 99 KT 6536K—Wt. 22 lbs. \$16.99

Cantilevered Tool Box **\$1149**

4 Double-cantilever design. 4 trays. Full lid gives rigidity. One-piece drawbolt with padlock eye. 16 1/4x8 1/4x10 1/4 inches. Gray-enamel finish. 99KT65351C—Wt. 12 lbs. \$11.49

Carpenter's Tool Box **\$1499**

5 Level brackets, clips for 4 saws, slot for steel square. Divided tray. Center lock, keys. Handle on top, one on each end. 30x8 1/2x9 in. Gray-enamel finish. 99KT6517C—Wt. 17 lbs. \$14.99

6 Tool or Tackle Box. Not CRAFTSMAN. Has lift-out tote tray. Drawbolt, padlock eye. 15x6 1/2x5 1/2 in. Tan-enamel finish. Shpg. wt. 3 lbs. 15 oz. 9 KT 65072..... \$3.19



\$1149
7 drawers

\$1849
8 drawers



\$2999
7 drawers

\$3899
10 drawers

CRAFTSMAN Mechanic's and Machinist's Chests

7 Mechanic's 2-drawer Chest. 20x8 1/2x9 1/2 in. high. Each drawer 2 in. deep. Top compartment, 2 1/2 in. deep. Full-suspension drawer slides, center pulls. Two 1-pc. drawbolts, staple bolt, padlock hasp. Plastisol-coated steel handle. Gray baked-enamel finish. 99 KT 65334C—Wt. 17 lbs. \$11.49

9 Machinist's 8-drawer Chest. 26 1/2x8 1/2x13 inches. 4 drawers 8 1/2x7 1/2x1; one 5 1/2x7 1/2x3 1/4; one 8 1/2x7 1/2x2 in. 2 full-width. Felt-lined. 99 KT 65224K—Wt. 39 lbs. \$37.99

7 drawers. As above, but 20x8 1/2x13 1/2 in. Five 8 1/2 in. wide drawers: four 1 in., one 2 in. deep. 2 full-width: 1 1/2, 2 1/2 in. deep. Felt-lined. 99 KT 6522K—Wt. 30 lbs. \$29.99

8 Mechanic's 2-drawer Chest. With handy tote tray. 20x8 1/2x9 1/2 in. Drawers each 18x8x2 1/4 inches... lock when cover is closed. Full-width drawer pulls. Plastisol-coated steel handle. Full-width piano hinge on cover. 1-pc. drawbolts. Baked-enamel finish. Tote tray: 19 1/4x7 1/4x1 1/2 in. Lock. 2 keys. 99 KT 65336C—Wt. 19 lbs. \$18.49

10 Mechanic's 3-drawer Chest. 26x12x14 1/2 in. Tote tray 18 1/2x7 1/2x1 1/2 in. Drawers 1 1/2, 2 1/2, 4 in. deep. Full-width drawer pulls. Lock and 2 keys. Gray and red finish. 99 KT 65252L—Wt. 54 lbs. \$38.99


2 drawers. As above, but 26x10x11 1/2 in. Drawers 2 1/2, 3 1/2 in. deep. 99 KT 65232K—Wt. 37 lbs. \$28.99

CRAFTSMAN Tote Tray

\$329

The efficient, lightweight way to carry tools around your shop. 19 1/2x9 1/2x6 1/2 inches. Gray enamel finish.

Shipping weight 4 pounds. 99 KT 6529C..... \$3.29



No Money Down on anything Sears sells

In actual tests, **CRAFTSMAN** Heavy-duty Chests and Cabinets, loaded with 50 lbs. per drawer, were opened and closed 50,000 times without damage



Set of 6-drawer Chest, 3-drawer Cabinet

Save \$6.99 on set. Separately \$106.98. Heavy-gauge steel. Tumbler lock with keys. Gray and red baked enamel finish. Wt. 154 lbs. \$9 mo.

99 KT 65269N2. Set, Cash \$99.99

6-drawer Chest. 26x12x14 1/2 in. high. Top center drawer 11x1 1/2 in. deep. End drawers 4 1/2 x 1 1/2 in. deep. 3 full-width drawers; two 1 1/2 in., one 2 1/2 in. deep. Full-suspension slides. 18 1/2 x 7 1/2 x 1 1/2 in. deep tote tray. Wt. 60 lbs. 99 KT 65262L—\$5 mo., Cash \$48.99

3-drawer Roller Cabinet. 26 1/2 x 17 1/2 x 32 in. high. 3 full-width drawers; two 2 1/2 in., one 5 1/2 in. deep. Lower compartment 26 1/2 x 17 1/2 x 12 in. deep. 3-in. ball bearing casters (2 fixed, 2 swivel). Two keys. Shpg. wt. 94 lbs.

99 KT 65302N—\$6 mo., Cash \$57.99



Double-width Posts

Vertical corner posts extra wide... actually 1 1/2 in. square. Keep cabinet rigid... give smooth drawer operation, even under heavy loads and constant use.



Reinforcing Channels

Heavy-duty "U" bars add extra vertical rigidity. Keep drawers and drawer supports in solid alignment... keep cabinet square and solid through years of use.



One-piece Bottom

Made of reinforced, heavy-gauge steel. You get greater load capacity without sag, without a binding pull on side panels and without "give" or loosening at welds.



Positive Locking Mechanism

When chest cover or cabinet panel is closed... solid, heavy steel bars securely lock all drawers automatically.

Add-on Chest \$24.99

Fits between chest and cabinet sections of all units shown except 99 KT 65034N below, right. 2 drawers. 22 1/2 x 10 1/2 x 3 1/2 in. high. Front panel with key lock. 99 KT 65272K—Wt. 34 lbs. \$24.99



9-drawer Roller Cabinet

\$103.95

Heavy-gauge steel. Gray and red baked enamel finish. 26 1/2 x 17 1/2 x 40 in. high. 4 top drawers; 10 1/2 x 15 1/2 x 2 1/2 in. high... mounted on compound slides. 5 full-width bottom drawers on roller slides; two 2 in., three 4 1/4 in. deep. Full-width drawer pulls.

4-in. ball bearing casters (2 fixed, 2 swivel). Toe brakes on swivel casters. Power panel knockout. Wt. 150 lbs. \$10 mo. 99 KT 65031N. Cash \$103.95

No Money Down on anything Sears Sells

SEE PAGE 96 FOR DETAILS

CRAFTSMAN Super-Duty Chest and Cabinet

\$309.95

- Heavy-duty compound slides on ALL drawers withstand rough use
- Recessed cabinet sides add extra support for tremendous strength
- Cabinet handles recessed too—won't pull out or bend

Save \$15.95 on set. Separately \$325.90. For heaviest shop and service use. Black and red enamel finish. Tumbler lock, keys.

Shipping weight 351 lbs. \$19.50 monthly. 99 KT 65298N2. Set, Cash \$309.95

10-drawer Chest. 33 1/2 in. wide; 15 1/2 in. deep; 18 1/2 in. high. 6 small drawers; 1 deep drawer; 3 full-width drawers. Wt. 143 lbs. 99 KT 65284N—\$10.50 monthly, Cash \$125.95

8-drawer Cabinet. 33 1/2 in. wide; 18 1/2 in. deep; 39 in. high. Strong casters. Wt. 208 lbs. 99 KT 65034N—\$13.50 monthly, Cash \$199.95



\$135.95

Set of 10-drawer Chest, 5-drawer Cabinet

Save \$11.03 on set. Separately \$146.98. Heavy-gauge steel. Tumbler lock with keys. Gray and red baked enamel finish. Wt. 209 lbs. \$11.00 mo. 99 KT 65285N2. Set, Cash \$135.95

10-drawer Chest. 26x12x19 in. high. Six drawers 7 1/2 x 1 1/2 in. deep; one 4 1/2 x 6 in. deep. Three full-width drawers; two 1 1/2 in., one 2 1/2 in. deep. Drawers 10 1/2 in. front to back. Tote tray 18 1/2 x 7 1/2 x 1 1/2 in. deep. Full suspension slides. Shpg. wt. 77 lbs. \$7 monthly. 99 KT 65282N. Cash \$61.99

5-drawer Roller Cabinet. 26 1/2 x 17 1/2 x 40 in. high. 5 full-width drawers; four 2 1/2 in., one 5 1/2 in. deep. 2 top drawers have center divider. Lower compartment 26 1/2 x 17 1/2 x 12 in. deep. 4-in. ball bearing casters (2 fixed, 2 swivel). Shpg. wt. 132 lbs. \$8.50 monthly. 99 KT 6503N. Cash \$84.99



Auxiliary Shelf. Attaches to side of cabinet top for more work space. 12 1/2 in. long; 15 1/2 in. wide. Red enamel finish. Shpg. wt. 6 lbs. 4 oz. 99 KT 65327. \$7.49

1 Drawer Dividers. Package of 4.

99 KT 65328—Chest. Wt. 1 lb. 6 oz. Pkg. \$1.99
99 KT 65329—Cabinet. Wt. 1 lb. 8 oz. Pkg. 2.29

2 Power Panel. Fits all 4 cabinets except 99 KT 65034N. 2 outlets; 3-prong receptacle. 99 KT 65326—Shipping weight 9 oz. \$3.99



Sears

CRAFTSMAN

The greatest
name in tools

for home, farm and shop...
the handyman and
the professional craftsman

SEARS, ROEBUCK AND CO.

Satisfaction Guaranteed or your money back

CRAFTSMAN... the only Ratchet Wrench with a special
PUSH-BUTTON for the quick release of sockets



1 Low as
\$6.99

See bottom left



No more hard pulling and prying to get a tight or greasy socket off the wrench! Just press the button... and socket is released. Also makes it much easier to attach socket to wrench

2

In actual tightening tests
CRAFTSMAN Ratchet Wrenches
were operated over 1/2 million times
without showing serious wear

1 In three dramatic factory tests, the wrenches were operated over 1/2 million times under full load (1/4 inch at 110 inch-pounds, 1/8 inch at 400 inch-pounds, 1/4 inch at 1200 inch-pounds).
Superb professional quality. Deep-forged, one-piece handle of "Full" steel for strength without bulk. Smooth, short stroke, push thumb lever to reverse the ratchet. Industrial-type chrome plating. Exceeds Federal Specification GG-W-6410, Class 2. See guarantee on page 93.

1/4-inch square drive, 8 1/2 inches long 9 KT 44975—Shipping weight 11 ounces.....	16.99
1/2-inch square drive, 9 1/2 inches long 9 KT 44976—Shipping weight 1 pound 4 ounces.....	8.99
3/4-inch square drive, 13 inches long 9 KT 44978—Shipping weight 1 pound 12 ounces.....	9.99

2 CRAFTSMAN Flex-head Ratchet Wrench. Same as the wrench above, but head adjusts from 0 to 90°.

1/4-inch square drive, 10 1/2 inches long 9 KT 42791—Shipping weight 1 pound 1 ounce.....	17.99
1/2-inch square drive, 16 1/2 inches long 9 KT 44974—Shipping weight 2 pounds 4 ounces.....	10.99

NOTE—For other socket wrenches, accessories and regular ratchet wrenches, see page 89.



No Money Down on anything Sears sells